



YENYO

HFR60A06PD

Hyperfast Recovery Rectifier

Features


- ★ Fast switching for high efficiency
- ★ Low noise
- ★ Low reverse leakage current
- ★ High voltage super FRD
- ★ PFC application

Mechanical Data

- ★ Case: Molded plastic TO-3P-AC
- ★ Epoxy: UL 94V-0 rate flame retardant ,
- ★ Terminals: Solderable per MIL-STD-202 method 208
- ★ Mounting position: Any
- ★ Weight : 6.2 grams

**Voltage Range 600V
Current 60.0 Ampere**

TO-3P

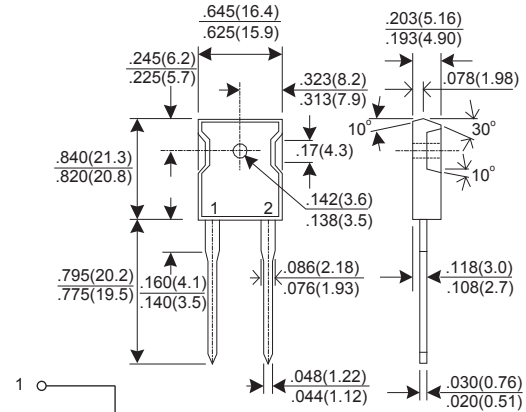

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

CHARACTERISTIC	SYMBOL	HFR60A06PD			UNIT
		Min.	Typ.	Max.	
Recurrent Peak Reverse Voltage	VRRM	-	-	600	V
RMS Voltage	VRMS	-	-	420	V
DC Blocking Voltage	V DC	-	-	600	V
Average Forward Rectified Current Tc= 80 °C	IF(AV)	-	-	60.0	A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	-	-	480	A
Instantaneous Forward Voltage @60A(25°C) @60A(150°C)	VF	-	-	2.5 2.2	V
DC Reverse Current @Tj=25°C At Rated DC Blocking Voltage @Tj=150°C	IR	-	-	250 1000	uA uA
Maximum Reverse Recovery Time (Note 1)	Trr	-	-	50	nS
Maximum Reverse Recovery Time (Note 2)	Trr	-	-	80	nS
Typical junction Capacitance (Note 3)	CJ	-	80	-	pF
Typical Thermal Resistance (Note 4)	R θJC	-	-	1.2	°CW
Operating Junction and Storage Temperature Range	TJ, TSTG	-65	-	175	°C

NOTES : (1) Reverse recovery test conditions IF =0.5A ,IR = 1A , Irr = 0.25A

(2) Reverse recovery test conditions IF = 15A, dIF/dt = 100A/us.

(3) Junction Capacitance test conditions : VR = 10V,IF = 0A.

(4) Thermal Resistance junction to case.

RATINGS AND CHARACTERISTIC CURVES HFR60A06PD

FIG.1 - FORWARD CURRENT DERATING CURVE

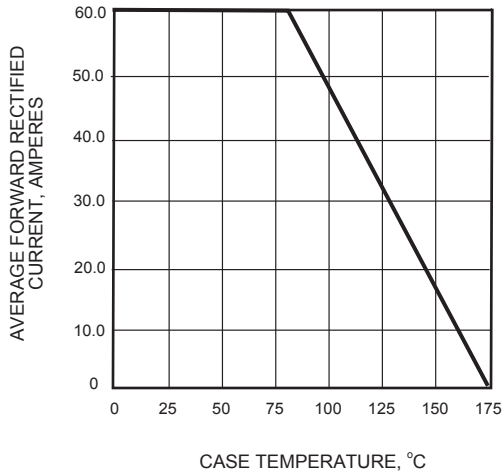


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

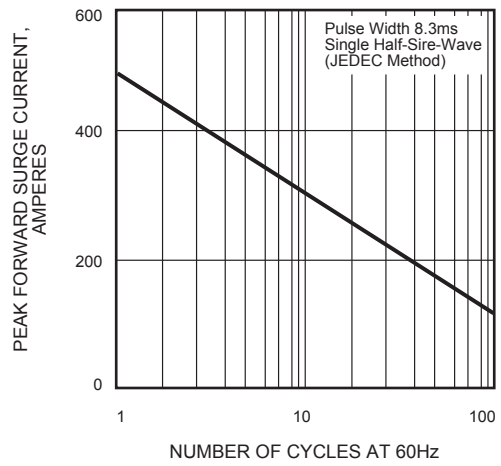


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

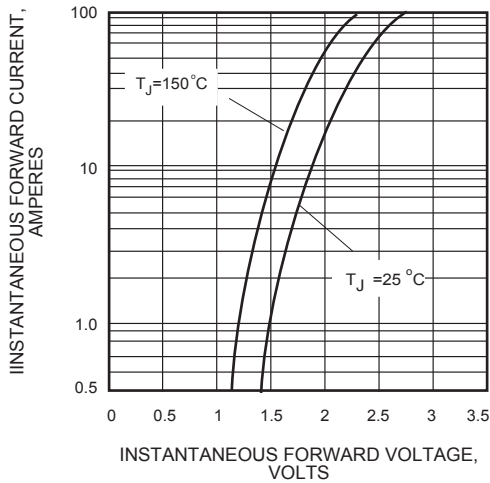


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

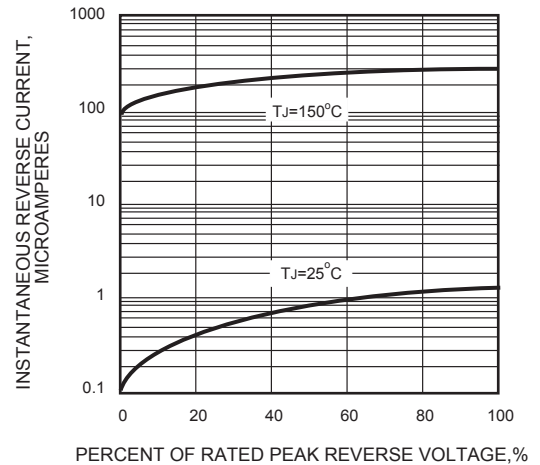


FIG.5 - T_{rr} , t_a AND t_b CURVES vs FORWARD CURRENT


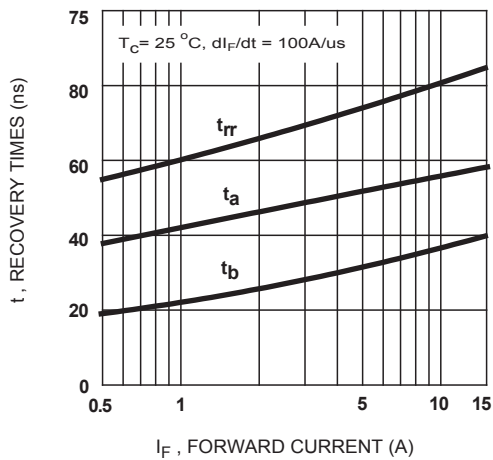


FIG.6 - TYPICAL JUNCTION CAPACITANCE

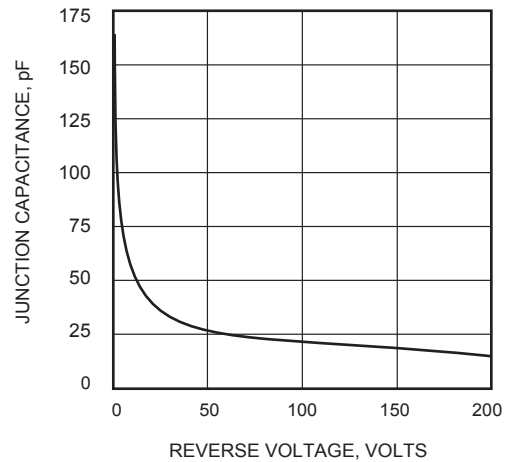

Test Circuits and Waveforms

FIG.7 - t_{rr} TEST CIRCUIT

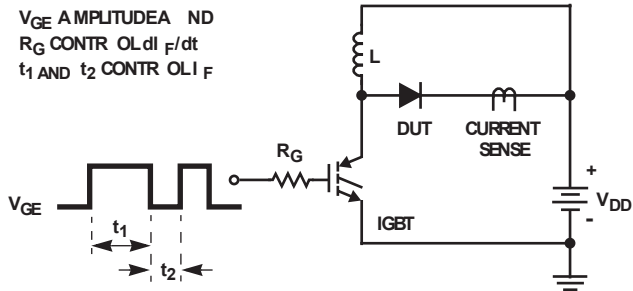


FIG.8 - t_{rr} WAVEFORMS AND DEFINITIONS

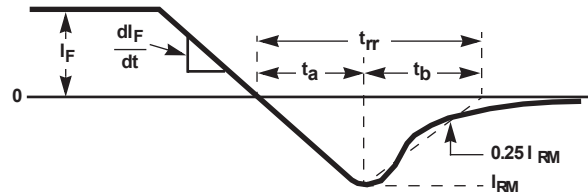


FIG.9 - AVALANCHE ENERGY TEST CIRCUIT

$I_{MAX} = 1A$
 $L = 40mH$
 $R < 0.1$
 $E_{AVL} = 1/2 L I_L^2 [V_{R(AVL)} / (V_{R(AVL)} - V_{DD})]$
 $Q_1 = IGBT (BV_{CES} > DUT V_{R(AVL)})$

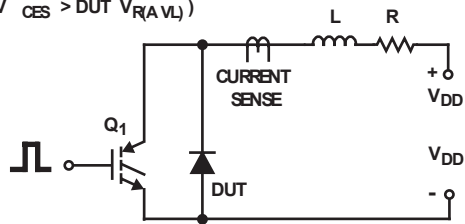


FIG.10 - AVALANCHE CURRENT AND VOLTAGE WAVEFORMS

