

HFS40A (JGX-40FA)**SOLID STATE RELAY****Features**

- 2500V dielectric strength
- LED status indicator
- Photo isolation
- Built-in snubber
- Zero cross or random turn-on
- Printed circuit board mount
- RoHS compliant

INPUT (TA = 25°C)

Control voltage range	05D	4 to 6VDC
	12D	9.6 to 14.4VDC
	24D	19.2 to 28.8VDC
Must operate voltage	05D	4VDC
	12D	9.6VDC
	24D	19.2VDC
Must release voltage	05D	1.0VDC
	12D	
	24D	
Max. reverse protection voltage	05D	-6VDC
	12D	-14.4VDC
	24D	-28.8VDC
Max. input current		20mA

OUTPUT (TA = 25°C)

Load voltage range	220A: 75 to 280VAC 380A: 48 to 440VAC	
Load current range	2A type: 0.1 to 2A 3A type: 0.1 to 3A	
Max. surge current (10ms)	10 times of rated current	
Max. leakage current	1.5mA	
Max. on-state voltage drop	1.5Vrms	
Max. turn-on time	Zero cross turn-on	1/2 cycle + 1ms
	Random turn-on	1ms
Max. turn-off time	1/2 cycle + 1ms	
Max. transient overvoltage	HFS40A/□□-220A□□□	600Vpk
	HFS40A/□□-380A□□□	800Vpk
Min. off-state dv/dt	100V/μs	
Min. power factor	0.5	

GENERAL (TA = 25°C)

Dielectric strength (input to output)	2500VAC, 50/60Hz, 1min	
Insulation resistance	1000MΩ (at 500VDC)	
Max. capacitance (input to output)	8pF	
Vibration resistance	10 to 55Hz 1.5mm DA	
Shock resistance	1000m/s ²	
Ambient temperature	Operating	-30°C to 80°C
	Storage	-30°C to 100°C
Ambient humidity	45% to 85% RH	
Unit weight	Approx. 18g	

DESCRIPTION

This SPST-NO printed circuit board mount SSR provides AC output switching in a high density package. The HFS40A's DC input is compatible with 5, 12 and 24V logic systems. The relays include a LED indicator to provide input status information. All models include an internal snubber. The relays provide 2500VAC opto-isolation, between input and output. Encapsulation, thermally conductive epoxy.


APPLICATIONS

- I/O interface
- Programmable controllers

PRECAUTIONS

1. Soldering must be completed within 10 seconds at 260°C or less or within 5 seconds at 350°C or less.
2. The SSR case serves to dissipate heat. Install the relays so that they are adequately ventilated. If poor ventilation is unavoidable, reduce the load current by half.
3. When using the HFS40A series for an AC load with a peak voltage of more than the rated, connect the load terminals of the relay to an inrush absorber (varistor). The recommended varistor voltage as follow:

The rated voltage	The recommended varistor voltage
200VAC	470VAC
380VAC	750VAC

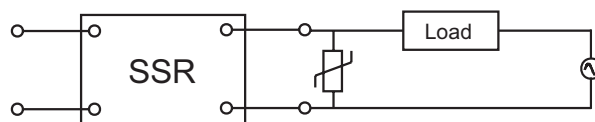

HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00

ORDERING INFORMATION


Type	HFS40A / 05 D- 220 A 2 Z- L (XXX)						
Input voltage	05: 4 to 6V	12: 9.6 to 14.4V					
	24: 19.2 to 28.8V						
Input voltage form	D: DC						
Load voltage	220: 220V	380: 380V					
Load voltage form	A: AC						
Load current	02: 2A	03: 3A					
Zero cross function	Z: Zero cross turn-on			P: Random turn-on			
LED indicator	L: With LED						
Customer special code	Only for special requirements, e.g. (555) stands for RoHS compliant						

Notes: HFS40A is an environmental friendly product, please mark special code (555) when order.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


Outline Dimensions

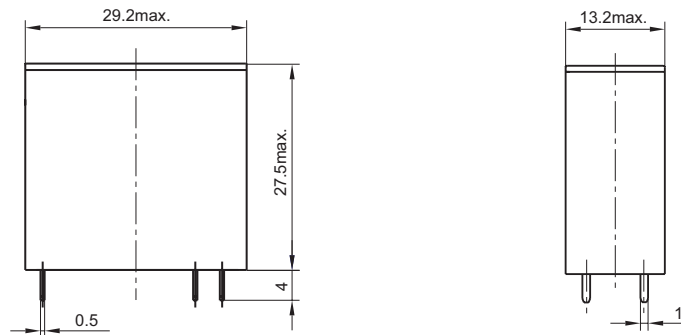

PCB Layout (Bottom view)




Wiring Diagram

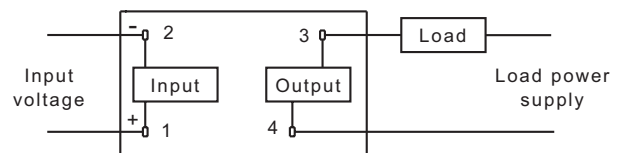


CHARACTERISTIC CURVES

Max. Load Current
vs. Ambient Temperature

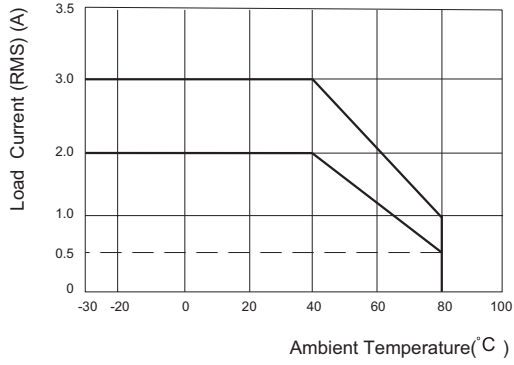

Max. Permissible Non-repetitive
Peak Surge Current vs. Continuance Time

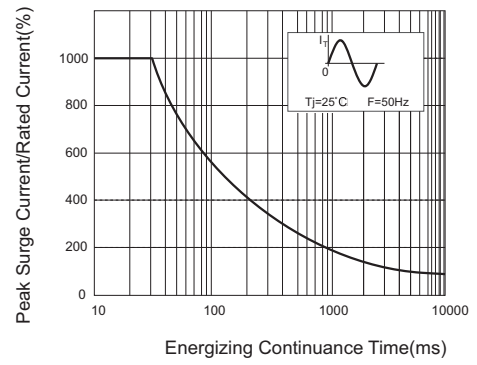

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.