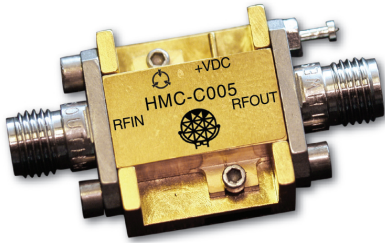


DIVIDE-BY-2 PRESCALER MODULE, 0.5 - 18 GHz

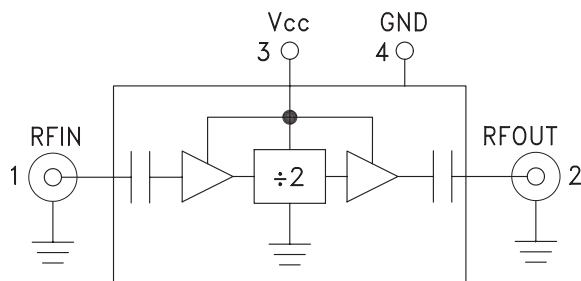


Typical Applications

Prescaler for 0.5 to 18 GHz PLL Applications:

- Point-to-Point / Multi-Point Radios
- VSAT Radios
- Fiber Optic
- Test Equipment
- Military & Space

Functional Diagram



Features

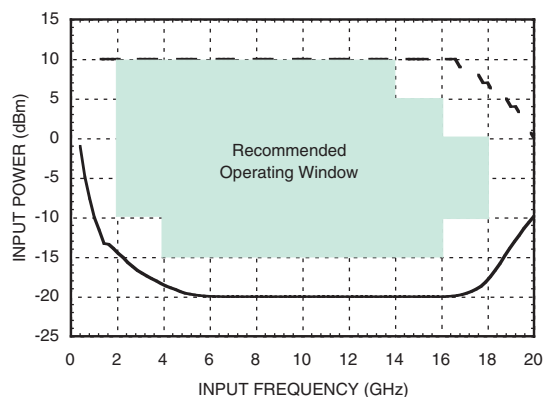
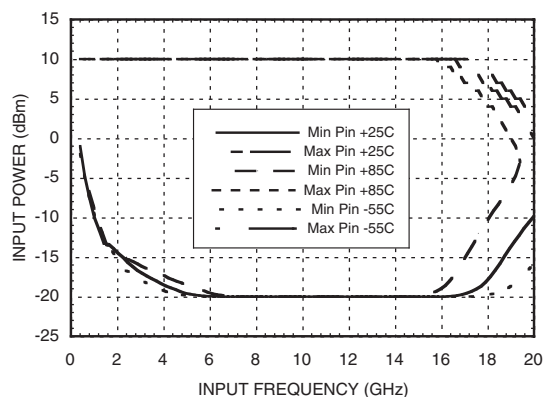
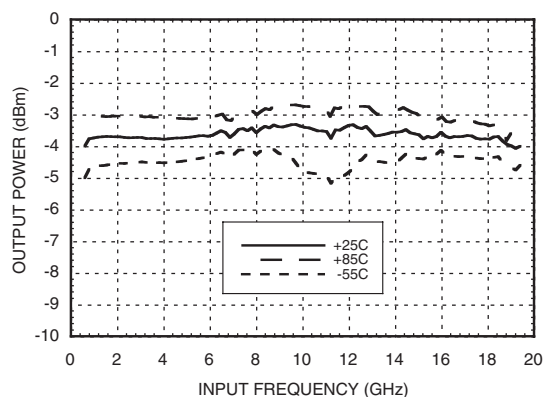
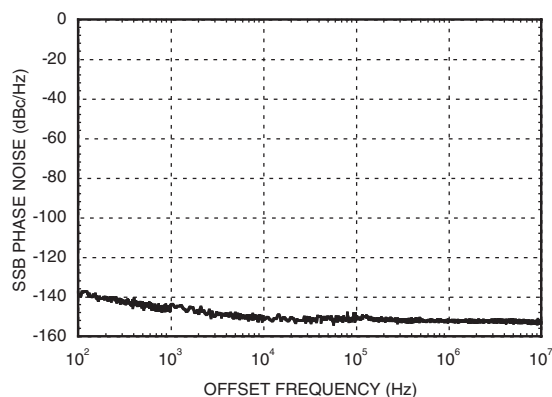
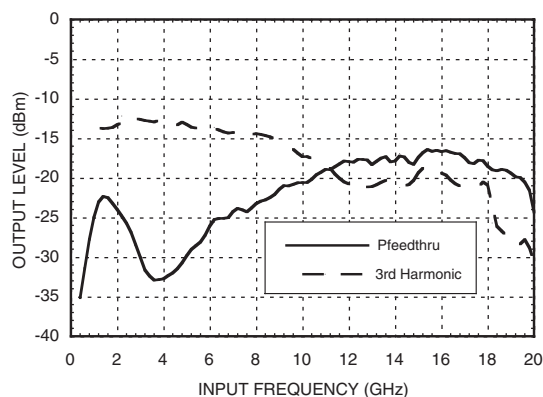
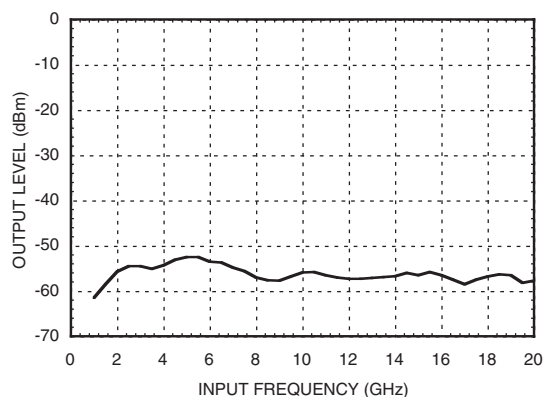
- Ultra Low SSB Phase Noise: -150 dBc/Hz
- Very Wide Bandwidth
- Output Power: -4 dBm
- Single DC Supply: +5V
- Hermetically Sealed Module
- Field Replaceable SMA Connectors
- 55 to +85 °C Operating Temperature

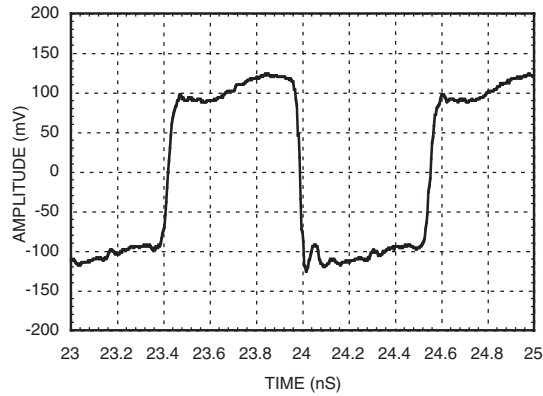
General Description

The HMC-C005 is a low noise Divide-by-2 Static Divider utilizing InGaP GaAs HBT technology packaged in a miniature, hermetic module with replaceable SMA connectors. This device operates from 0.5 to 18 GHz input frequency from a single +5.0V DC supply. The low additive SSB phase noise of -150 dBc/Hz at 100 kHz offset helps the user maintain excellent system noise performance.

Electrical Specifications, $T_A = +25^\circ\text{C}$, 50 Ohm System, $V_{cc} = +5V$

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|----------------------------------|---------------------------------------|------|------|------|--------|
| Maximum Input Frequency | | 18 | 19 | | GHz |
| Minimum Input Frequency | Sine Wave Input | | | 0.5 | GHz |
| Input Power Range | $F_{in} = 2$ to 4 GHz | -10 | -15 | +10 | dBm |
| | $F_{in} = 4$ to 14 GHz | -15 | -20 | +10 | dBm |
| | $F_{in} = 14$ to 16 GHz | -15 | -20 | +5 | dBm |
| | $F_{in} = 16$ to 18 GHz | -10 | -15 | 0 | dBm |
| Output Power | $F_{in} = 0.5$ to 18 GHz | -7 | -4 | | dBm |
| Reverse Leakage | $F_{in} = 0.5$ to 18 GHz | | 55 | | dB |
| SSB Phase Noise (100 kHz offset) | $P_{in} = 0$ dBm, $F_{in} = 4.8$ GHz | | -150 | | dBc/Hz |
| Output Transition Time | $P_{in} = 0$ dBm, $F_{out} = 882$ MHz | | 100 | | ps |
| Supply Current (I_{cc}) | | | 75 | | mA |

**DIVIDE-BY-2 PRESCALER
 MODULE, 0.5 - 18 GHz**
Input Sensitivity Window, $T = 25\text{ }^{\circ}\text{C}$ **Input Sensitivity vs. Temperature****Output Power vs. Temperature****SSB Phase Noise Performance, $P_{in} = 0\text{ dBm}$, $T = 25\text{ }^{\circ}\text{C}$** **Output Harmonic Content, $P_{in} = 0\text{ dBm}$, $T = 25\text{ }^{\circ}\text{C}$** **Reverse Leakage, $P_{in} = 0\text{ dBm}$, $T = 25\text{ }^{\circ}\text{C}$** 

**DIVIDE-BY-2 PRESCALER
 MODULE, 0.5 - 18 GHz**
**Output Voltage Waveform,
 Pin= 0 dBm, Fout= 882 MHz, T= 25 °C**

Absolute Maximum Ratings




| | |
|-----------------------|----------------|
| Supply Voltage (Vcc) | +5.5V |
| RF Input (Vcc = +5V) | +13 dBm |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -55 to +85 °C |
| ESD Sensitivity (HBM) | Class 1A |


**ELECTROSTATIC SENSITIVE DEVICE
 OBSERVE HANDLING PRECAUTIONS**
Typical Supply Current vs. Vcc

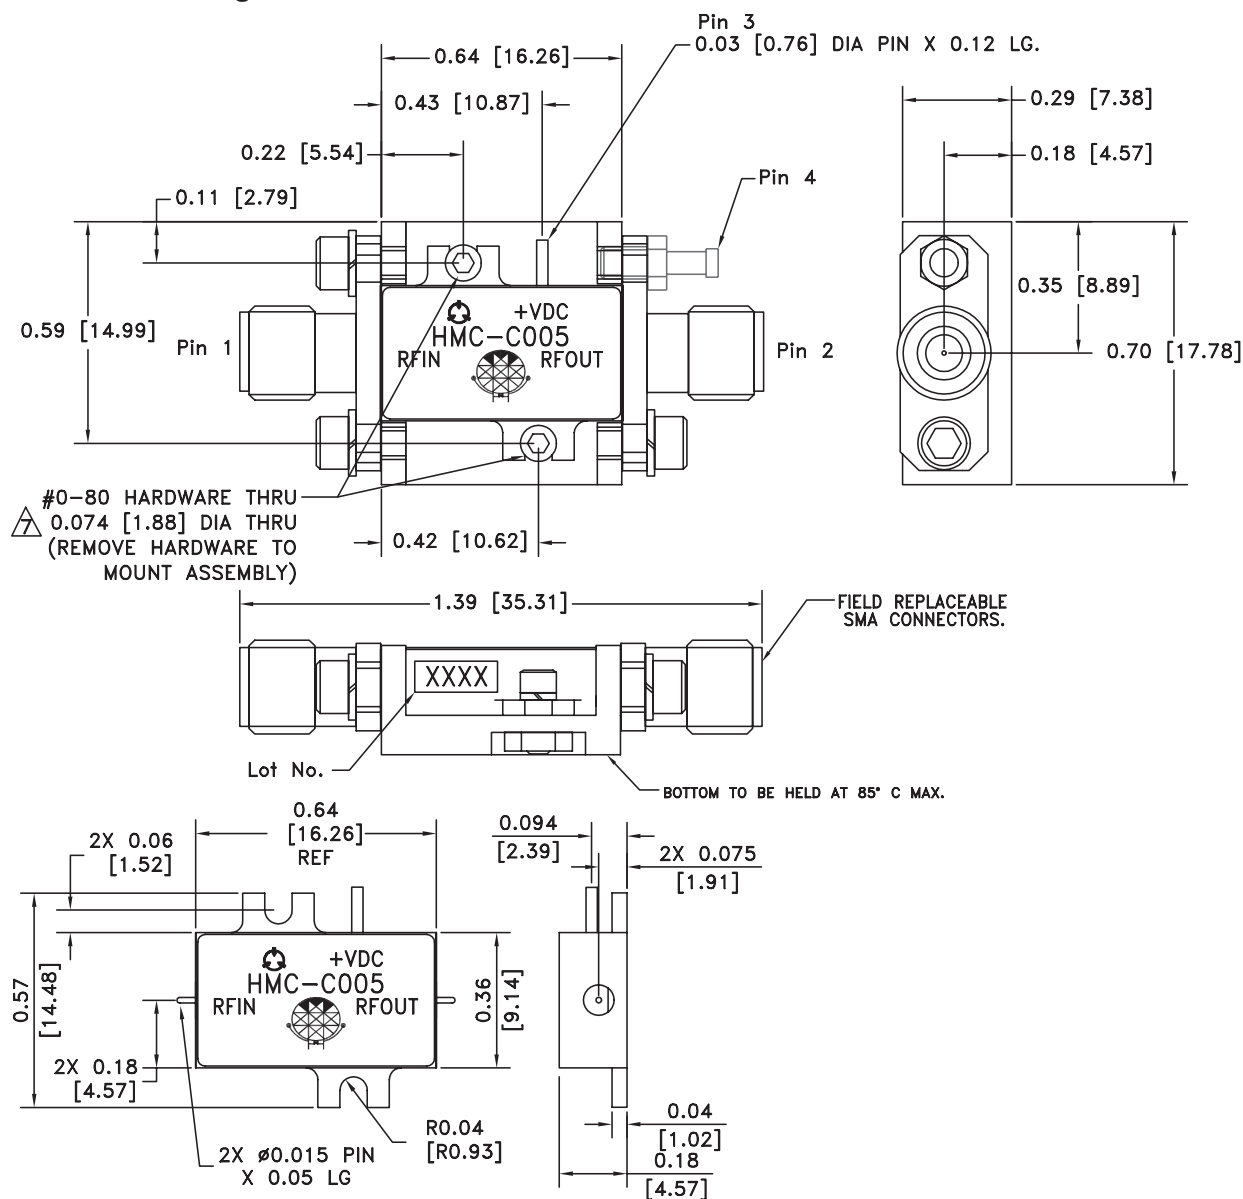
| Vcc | Icc (mA) |
|------|----------|
| 4.75 | 66 |
| 5.0 | 75 |
| 5.25 | 84 |

Note: Divider will operate over full voltage range shown above


Pin Description

| Pin Number | Function | Description | Interface Schematic |
|------------|-------------------|---|---|
| 1 | RFIN & RF Ground | RF input connector, SMA female, field replaceable. RF Input is AC coupled. |  |
| 2 | RFOUT & RF Ground | RF output connector, SMA female, field replaceable. Divided output is AC coupled.. |  |
| 3 | Vcc | Supply voltage 5V ± 0.25V. | |
| 4 | GND | Power supply ground. |  |

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:
 20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373
 Order On-line at www.hittite.com

**DIVIDE-BY-2 PRESCALER
 MODULE, 0.5 - 18 GHz**
Outline Drawing

NOTES:

1. PACKAGE, LEADS, COVER MATERIAL: KOVAR™
 2. BRACKET MATERIAL: ALUMINUM
 3. PLATING: ELECTROLYTIC GOLD 50 MICROINCHES MIN., OVER ELECTROLYTIC NICKEL 75 MICROINCHES MIN.
 4. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
 5. TOLERANCES \pm 0.005 [0.13] UNLESS OTHERWISE SPECIFIED.
 6. FIELD REPLACEABLE SMA CONNECTORS.
TENSOLITE 5602 - 5CCSF OR EQUIVALENT.
-  TO MOUNT MODULE TO SYSTEM PLATFORM REPLACE 0-80 HARDWARE WITH DESIRED MOUNTING SCREWS.