

ULTRA LOW PHASE NOISE AMPLIFIER MODULE, 7 - 11 GHz




Typical Applications

The HMC-C076 is ideal for:

- Microwave Radio
- Military & Space
- Test Instrumentation
- VSAT

Functional Diagram

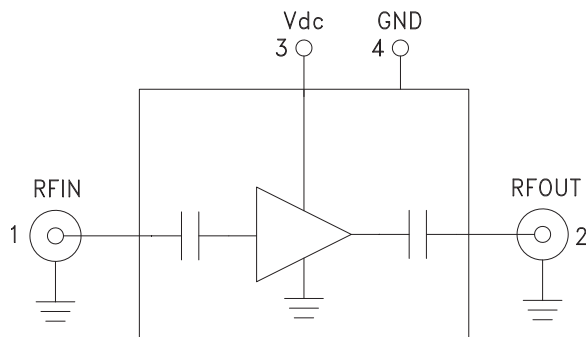

Features

- Ultra Low Phase Noise: -170 dBc/Hz @ 1 kHz
- Noise Figure: 6 dB
- Gain: 9 dB
- Psat: +25 dBm
- 50 Ohm Matched Input/Output
- Single Supply Voltage: +7V @ 300mA
- Hermetically Sealed Module
- Field Replaceable SMA Connectors
- 55°C to +85°C Operating Temperature

General Description

The HMC-C076 is a GaAs HBT Ultra Low Noise Amplifier in a miniature, hermetic module designed to operate between 7 and 11 GHz. This high dynamic range amplifier module provides 9 dB of gain, 6 dB noise figure and up to +25 dBm of output power with a single supply of +7V. The ultra low phase noise contribution of -170 dBc/Hz at 1 kHz offset, enables superior modulation accuracy within transceiver architectures. The wideband distributed amplifier I/O's are internally matched to 50 Ohms and DC blocked for robust performance. The module features removable SMA connectors which can be detached to allow direct connection of the I/O pins to a microstrip or coplanar circuit.

Electrical Specifications, $T_A = +25^\circ \text{C}$, $V_{dc} = +7\text{V}$

Parameter	Min.	Typ.	Max.	Units
Frequency Range	7 - 11			GHz
Vdc Range	6	7	8	V
Gain	5	9		dB
Gain Variation Over Temperature		0.02		dB/ °C
Noise Figure		6		dB
Input Return Loss		12		dB
Output Return Loss		15		dB
Output Power for 1 dB Compression (P1dB)	20	22		dBm
Saturated Output Power (Psat)		25		dBm
Output Third Order Intercept (IP3)		33		dBm
Phase Noise @ 100 Hz, Psat, 9 GHz		-160		dBc/Hz
Phase Noise @ 1 kHz, Psat, 9 GHz		-170		dBc/Hz
Phase Noise @ 10 kHz, Psat, 9 GHz		-180		dBc/Hz
Supply Current		300	360	mA









MICROWAVE CORPORATION v00.1109

**HMC-C076**

ULTRA LOW PHASE NOISE AMPLIFIER MODULE, 7 - 11 GHz


1

AMPLIFIERS

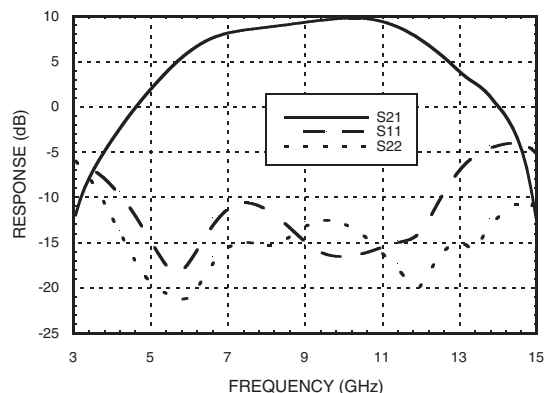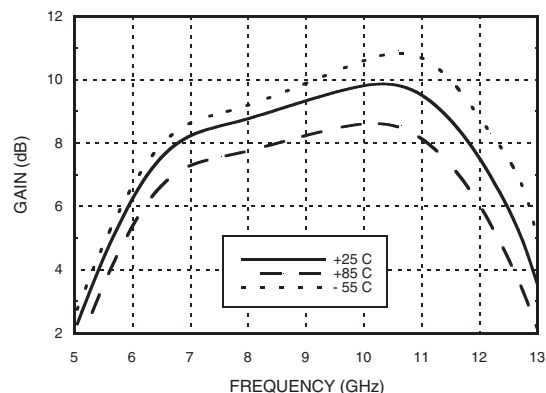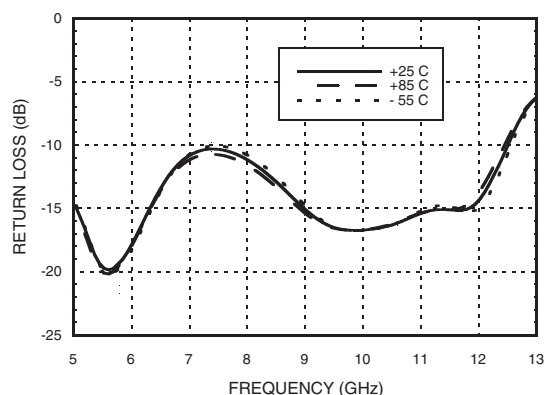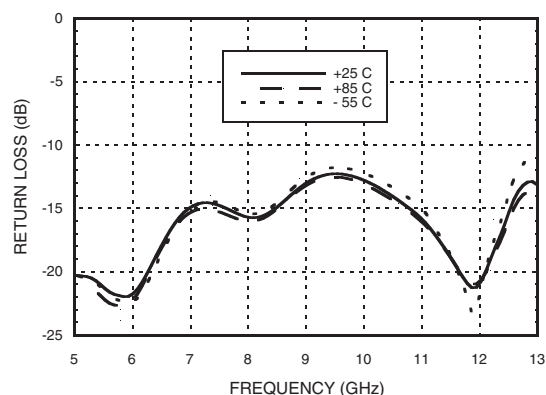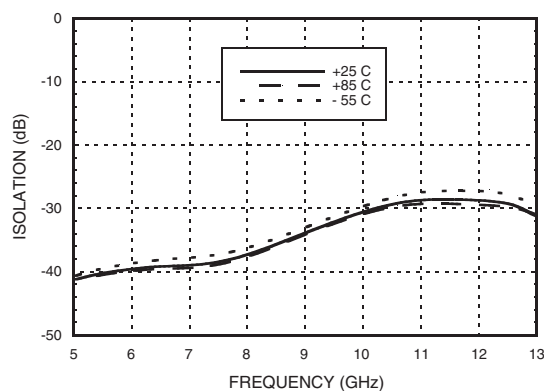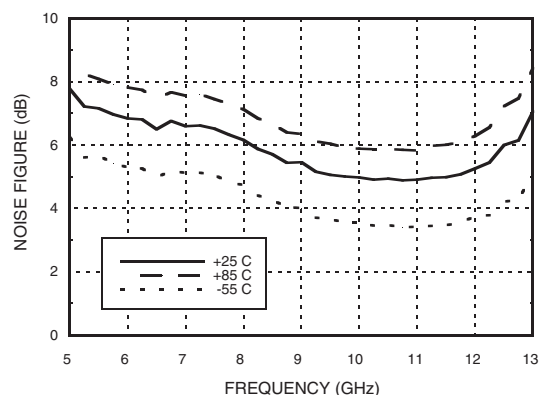
Broadband, Gain & Return Loss**Gain vs. Temperature****Input Return Loss vs. Temperature****Output Return Loss vs. Temperature****Reverse Isolation vs. Temperature****Noise Figure vs. Temperature**

**ULTRA LOW PHASE NOISE
AMPLIFIER MODULE, 7 - 11 GHz**


Output P1dB vs. Temperature

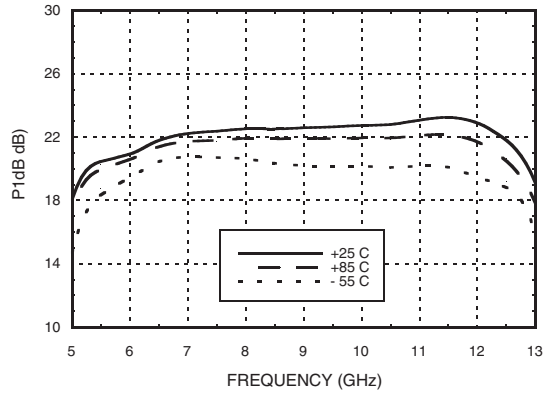


Output Psat vs. Temperature

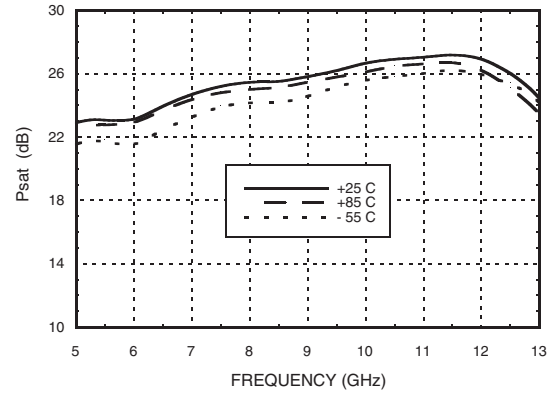


Output IP3 vs. Temperature

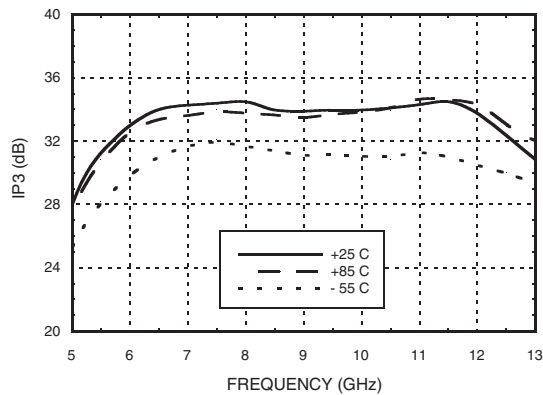


Phase Noise at Pout = 10 dBm @ 9 GHz

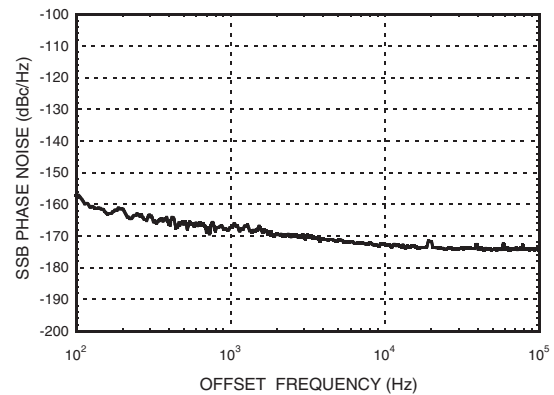

Phase Noise at Pout = P1dB @ 9 GHz

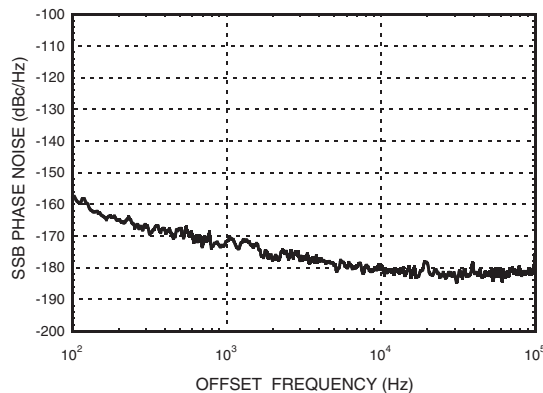

Phase Noise at Pout = Psat @ 9 GHz

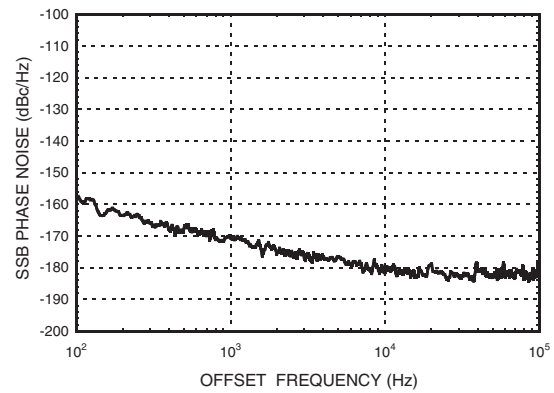



MICROWAVE CORPORATION v00.1109

**HMC-C076**

ULTRA LOW PHASE NOISE AMPLIFIER MODULE, 7 - 11 GHz

Absolute Maximum Ratings

Bias Supply Voltage (V)	+8V
RF Input Power (RFIN)	+20 dBm
Continuous P _{diss} (T = 85 °C)	2.88W
Storage Temperature	-65 to +150 °C
Operating Temperature	-55 to +85 °C
ESD Sensitivity (HBM)	Class 1A




ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	RFIN & RF Ground	RF input connector, coaxial female, field replaceable. This pin is AC coupled and matched to 50 Ohms.	
2	RFOUT & RF Ground	RF output connector, coaxial female, field replaceable. This pin is AC coupled and matched to 50 Ohms.	
3	Vdc	Power supply voltage for the amplifier.	
4	GND	Power supply ground.	

**ULTRA LOW PHASE NOISE
AMPLIFIER MODULE, 7 - 11 GHz**

Outline Drawing

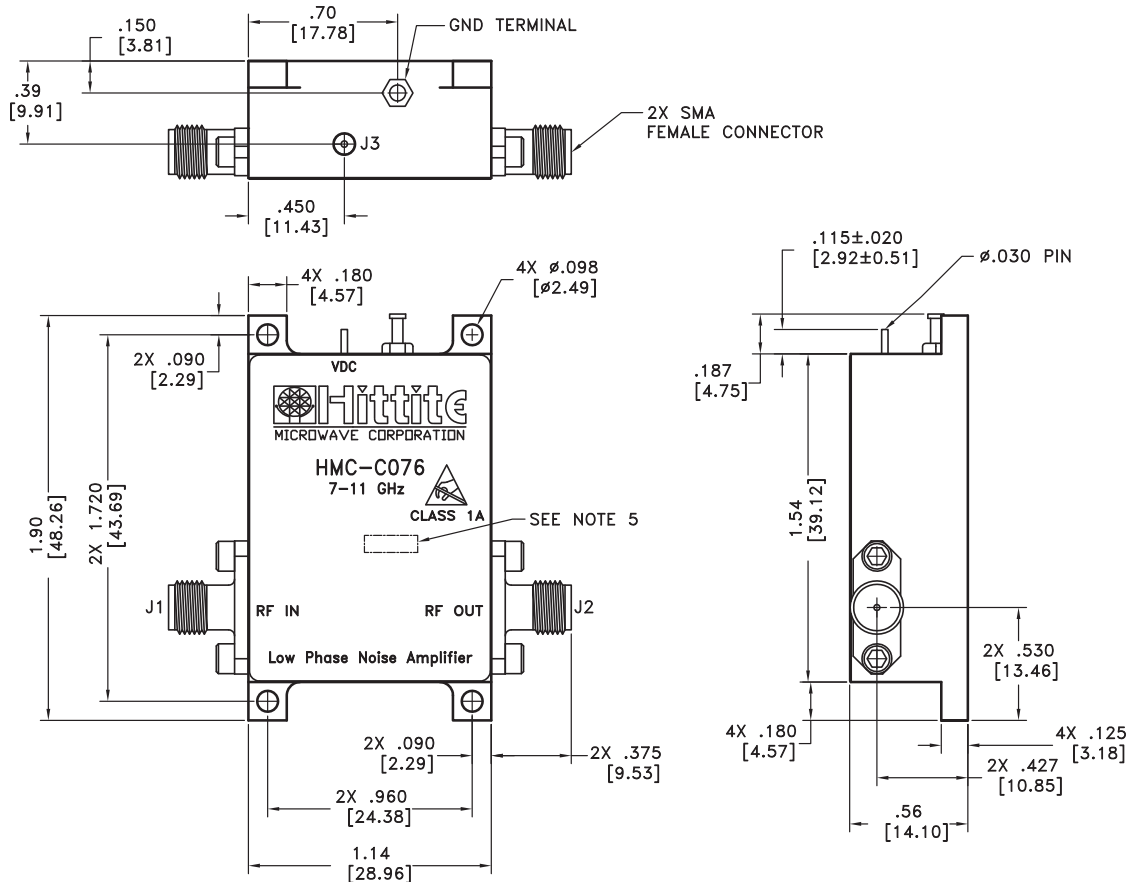

Package Information

Package Type	C-16
Package Weight	107 gms ^[1]

[1] ±1 gms Tolerance

NOTES:

1. PACKAGE, LEADS, COVER MATERIAL: KOVAR™
2. FINISH: GOLD PLATE OVER NICKEL PLATE.
3. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. TOLERANCES:
 - 4.1 .XX = ±.02
 - 4.2 .XXX = ±.010
5. MARK LOT NUMBER ON 0.080 X 0.250 LABEL WHERE SHOWN, WITH 0.030" MIN TEXT HEIGHT.



MICROWAVE CORPORATION

v00.1109

**HMC-C076****ULTRA LOW PHASE NOISE
AMPLIFIER MODULE, 7 - 11 GHz****Notes:****1****AMPLIFIERS**