



CHENMKO ENTERPRISE CO.,LTD

2SC2411KPT

SURFACE MOUNT

Medium Power NPN Transistor

VOLTAGE 32 Volts CURRENT 0.5 Ampere

Lead free devices

APPLICATION

* Medium Power Amplifier .

FEATURE


- * Surface mount package. (SOT-23)
- * Low saturation voltage V
- * Low cob. Cob=6.0pF(Typ)($V_{CE(sat)}=0.4V(max.)$)($I_C=500mA$)
- * $P_C= 200mW$ (mounted on ceramic substrate).
- * High saturation current capability.

CONSTRUCTION


- * NPN Silicon Transistor
- * Epitaxial planner type

MARKING

- * HFE(P):PT
- * HFE(Q):NC
- * HFE(R):1P-




SOT-23

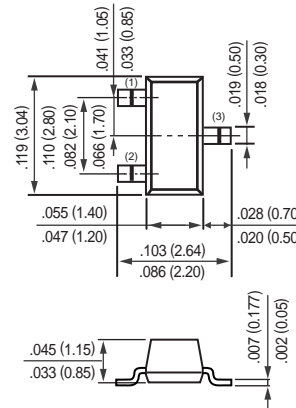

Dimensions in inches and (millimeters)

SOT-23

CIRCUIT



MAXIMUM RATINGS (At $T_A = 25^{\circ}C$ unless otherwise noted)

RATINGS	CONDITION	SYMBOL	MIN.	MAX.	UNITS
Collector - Base Voltage	Open Emitter	V_{CB0}	-	40	Volts
Collector - Emitter Voltage	Open Base	V_{CE0}	-	32	Volts
Emitter - Base Voltage	Open Collector	V_{EB0}	-	5	Volts
Collector Current DC		I_C	-	500	mAmps
Peak Collector Current		I_{CM}	-	500	mAmps
Peak Base Current		I_{BM}	-	10	mAmps
Total Power Dissipation	$T_A \leq 25^{\circ}C$; Note 1	P_{TOT}	-	350	mW
Storage Temperature		T_{STG}	-55	+150	$^{\circ}C$
Junction Temperature		T_J	-	+150	$^{\circ}C$
Operating Ambient Temperature		T_{AMB}	-55	+150	$^{\circ}C$

Note

1. Transistor mounted on ceramic substrate 50mmX50mmX0.8t.
2. Measured at Pulse Width 300 us, Duty Cycle 2%.

2002-10

RATING CHARACTERISTICS (2SC2411KPT)

ELECTRICAL CHARACTERISTICS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETERS	CONDITION	SYMBOL	MIN.	TYPE	MAX.	UNITS
Collector Cut-off Current	$I_E=0; V_{CB}=20\text{V}$	I_{CBO}	-	-	1.0	μA
Emitter Cut-off Current	$I_C=0; V_{EB}=4\text{V}$	I_{CEO}	-	-	1.0	μA
DC Current Gain	$V_{CE}=3\text{V}$; Note 1 $I_C=100\text{mA}$; Note 2	h_{FE}	82	-	390	
Collector-Emitter Saturation Voltage	$I_C=500\text{mA}; I_B=50\text{mA}$	V_{CEsat}	-	-	0.4	Volts
Base-Emitter Saturatio Voltage	$I_C=500\text{mA}; I_B=50\text{mA}$	V_{BEsat}	-	-	1.1	Volts
Output Collector Capacitance	$I_E=I_C=0; V_{CB}=12\text{V}; f=1\text{MHz}$	C_{ob}	-	6.0	-	pF
Transition Frequency	$I_C=20\text{mA}; V_{CE}=5\text{V}; f=100\text{MHz}$	f_T	-	250	-	MHz

Note :

1. Pulse test: $t_p \leq 300\mu\text{Sec}$; $\delta \leq 0.02$.
2. h_{FE} : Classification P: 82 to 180, Q: 120 to 270, R: 180 to 390

RATING CHARACTERISTIC CURVES (2SC2411KPT)

Fig.1 Grounded emitter propagation characteristics

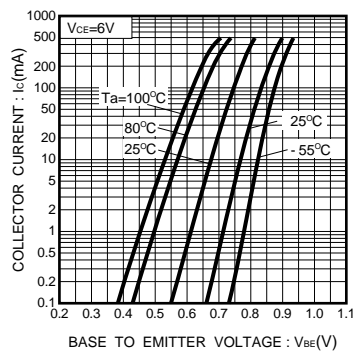


Fig.2 Grounded emitter output characteristics (1)


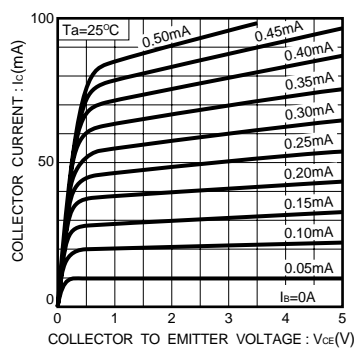


Fig.3 Grounded emitter output characteristics (2)

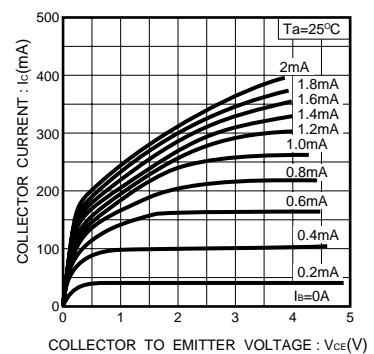

RATING CHARACTERISTIC CURVES (2SC2411KPT)

Fig.4 Collector-emitter saturation voltage vs. collector current

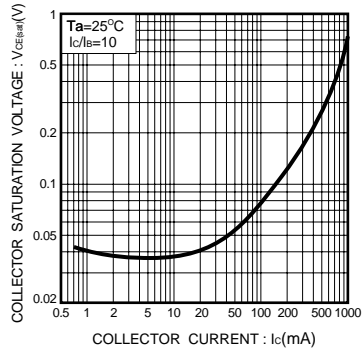


Fig.5 DC current gain vs. collector current

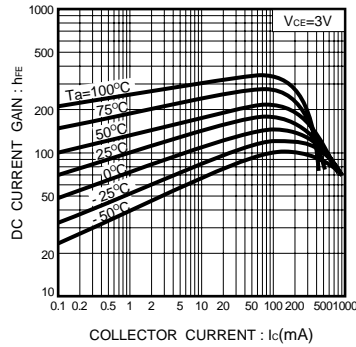


Fig.6 Gain bandwidth product vs. emitter current

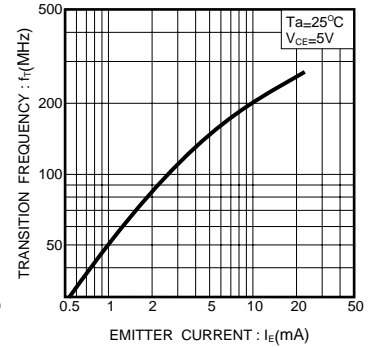


Fig.7 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

