



**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF HEI AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF HEI AND MUST BE RETURNED TO HEI UPON ITS REQUEST.

**HT13X13-213**

**Product Specification**

Rev. D

**LCD SBU**  
**Hyundai Electronics Industries Co.,Ltd.**


**SPEC. NUMBER**  
S864-1024

**PRODUCT GROUP**  
TFT-LCD PRODUCT

**REV.**  
D

**ISSUE DATE**  
1999.12.03

**PAGE OF**  
1 / 20

|  |           | PRODUCT GROUP                                                                | REV.     | ISSUE DATE        |
|-----------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------|----------|-------------------|
|                                                                                   |           | TFT-LCD PRODUCT                                                              | D        | 1999.12.03        |
| REVISION HISTORY                                                                  |           |                                                                              |          |                   |
| REV.                                                                              | ECN NO.   | DESCRIPTION OF CHANGES                                                       | DATE     | PREPARED          |
| 0                                                                                 |           | Initial Release                                                              | 99.05.19 | J.H.Choi          |
| A                                                                                 | E905-F016 | - Update Electrical/Optic/Signal Spec.                                       | 99.05.31 | J.S.Park          |
| B                                                                                 | E908-F008 | - Update Outline Dimension(Rear View)                                        | 99.08.19 | J.S.Park          |
| C                                                                                 | E910-F007 | - Correct Erratum, Company name(cover) and definition of light leakage(10.4) | 99.10.11 | J.S.Park          |
| D                                                                                 | E912-F002 | - Update Outline Dimension(Front View)                                       | 99.12.03 | J.S.Park          |
| SPEC. NUMBER<br>S864-1024                                                         |           | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD              |          | PAGE OF<br>2 / 20 |

|                                                                                   |                      |      |            |
|-----------------------------------------------------------------------------------|----------------------|------|------------|
|  | <b>PRODUCT GROUP</b> | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT      | D    | 1999.12.03 |

## Contents

|                                                                  | Page |
|------------------------------------------------------------------|------|
| 1.0 General Description .....                                    | 4    |
| 2.0 Absolute Maximum Ratings .....                               | 5    |
| 3.0 Electrical Specifications .....                              | 6    |
| 4.0 Optical Specifications .....                                 | 7    |
| 5.0 Interface Connection .....                                   | 9    |
| 6.0 Signal Timing Specifications .....                           | 10   |
| 7.0 Signal Timing Waveforms .....                                | 11   |
| 8.0 Input Signals, Basic Display Colors & Gray Scale of Colors.. | 12   |
| 9.0 Power Sequence .....                                         | 13   |
| 10.0 Mechanical Characteristics .....                            | 14   |
| 11.0 Reliability Test .....                                      | 15   |
| 12.0 Handling & Cautions .....                                   | 16   |
| 13.0 Appendix .....                                              | 17   |


|                           |                                                                 |                   |
|---------------------------|-----------------------------------------------------------------|-------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>3 / 20 |
|---------------------------|-----------------------------------------------------------------|-------------------|

|  | PRODUCT GROUP   | REV. | ISSUE DATE |
|-----------------------------------------------------------------------------------|-----------------|------|------------|
|                                                                                   | TFT-LCD PRODUCT | D    | 1999.12.03 |

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

HT13X13-213 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 13.3 inch diagonally measured active area with XGA resolutions (1024 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The DC/AC inverter for back-light driving is not built in this model.

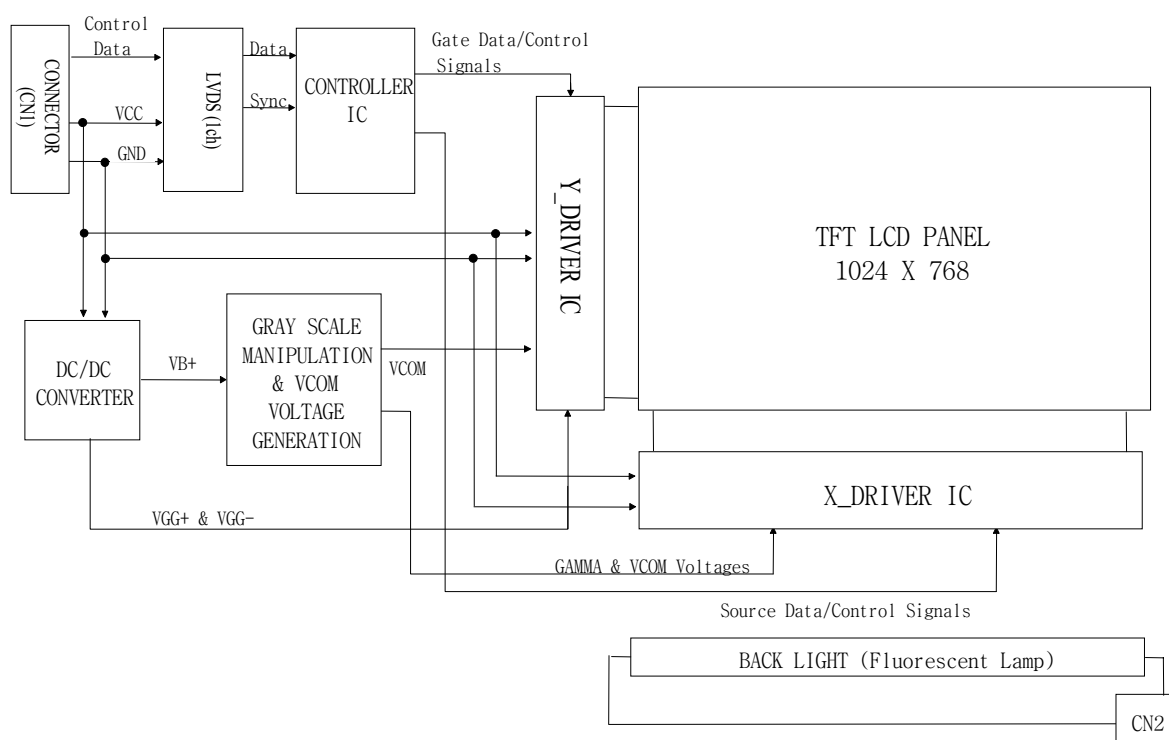

### 1.2 Features

- Low driving voltage and low power consumption
- Thin and light weight
- 3.3 V power supply
- 1 Channel LVDS Interface
- Single CCFL (Bottom side/Horizontal Direction)
- 262,144 colors
- Data Enable Mode
- Side Mounting Frame

|                           |                                                                 |                   |
|---------------------------|-----------------------------------------------------------------|-------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>4 / 20 |
|---------------------------|-----------------------------------------------------------------|-------------------|

|                                                                                   |                      |      |            |
|-----------------------------------------------------------------------------------|----------------------|------|------------|
|  | <b>PRODUCT GROUP</b> | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT      | D    | 1999.12.03 |

### 1.3 General Specifications

The followings are general specifications at the model HT13X13-213. (listed in Table 1.)

<Table 1. General Specifications>

| Parameter           | Specification                            | Unit   | Remarks |
|---------------------|------------------------------------------|--------|---------|
| Active area         | 270.3 (H) x 202.8(V)                     | mm     |         |
| Number of pixels    | 1024(H) x 768(V)                         | pixels |         |
| Pixel pitch         | 0.264(H) x 0.264(V)                      | mm     |         |
| Pixel arrangement   | RGB Vertical stripe                      |        |         |
| Display colors      | 262,144                                  | colors |         |
| Display mode        | Normally white                           |        |         |
| Dimensional outline | 284.0±0.5(H) x 214.0±0.5(V) x 7.2(D) Typ | mm     |         |
| Weight              | 560 Typ                                  | g      |         |
| Back-light          | CCFL, Horizontal-lamp type               |        | Note 1  |

Note 1: CCFL (Cold Cathode Fluorescent Lamp)

### 2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings>

| Parameter               | Symbol          | Min. | Max.                 | Unit | Remarks |
|-------------------------|-----------------|------|----------------------|------|---------|
| Power Supply Voltage    | V <sub>DD</sub> | -0.3 | 4.6                  | V    |         |
| Logic Input Voltage     | V <sub>IN</sub> | -0.3 | V <sub>DD</sub> +0.3 | V    |         |
| Operating Temperature   | T <sub>OP</sub> | 0    | +50                  | °C   |         |
| Storage Temperature     | T <sub>SP</sub> | -20  | +60                  | °C   |         |
| Back-light Lamp Current | IBL             | -    | 6.0                  | mA   |         |

|                           |                                                                 |                   |
|---------------------------|-----------------------------------------------------------------|-------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>5 / 20 |
|---------------------------|-----------------------------------------------------------------|-------------------|

|                                                                                   |                 |      |            |
|-----------------------------------------------------------------------------------|-----------------|------|------------|
|  | PRODUCT GROUP   | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT | D    | 1999.12.03 |

### 3.0 ELECTRICAL SPECIFICATIONS

#### 3.1 Electrical Specifications

< Table 3. Electrical specifications >

| Parameter                           |                          | Min.   | Typ.   | Max.   | Unit       | Remarks                                                |
|-------------------------------------|--------------------------|--------|--------|--------|------------|--------------------------------------------------------|
| Power Supply Voltage                | $V_{DD}$                 | 3.0    | 3.3    | 3.6    | V          | Note 1                                                 |
| Power Supply Current                | $I_{DD}$                 |        | 360    | -      | mA         | Note 1                                                 |
| High Level Input Signal Voltage     | $V_{IH}$                 | 0.7VDD | -      | -      | V          | Note 2                                                 |
| Low Level Input Signal Voltage      | $V_{IL}$                 |        |        | 0.3VDD | V          | Note 2                                                 |
| Back-light Lamp Voltage             | $V_{BL}$                 | 820    | 680    | 630    | $V_{rms}$  | Note 3                                                 |
| Back-light Lamp Current             | $I_{BL}$                 | 2.0    | 4.5    | 6.0    | $mA_{rms}$ | At $I_{BL} = 4.5 \text{ mA}$ ,<br>100cd/m <sup>2</sup> |
| Back-light Lamp operating Frequency | $F_L$                    | 40     | (44.4) | 70     | KHz        | Note 4<br>One Lamp                                     |
| Lamp Starting Voltage               | $T_a = 25^\circ\text{C}$ | 700    | -      | 880    | $V_{rms}$  | Note 5                                                 |
|                                     | $T_a = 0^\circ\text{C}$  | 885    | -      | 1150   | $V_{rms}$  | Note 5                                                 |
| Lamp Life                           |                          | 10,000 | 15,000 |        | hrs        | At $I_{BL} = 6.0 \text{ mA}$                           |
| Power Consumption                   | $P_D$                    |        | 1.2    |        | W          | Typ.@8 Color Bar                                       |
|                                     | $P_{BL}$                 |        | 3.1    |        | W          | Note 6                                                 |
|                                     | $P_{total}$              |        | 4.3    |        | W          |                                                        |

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for 3.3V at 25°C.

2. The values specified apply to all logic inputs.

: ENAB, Clock, Data Signals, etc. are serial input signal. (See Ref. 7.2.)

3. Reference value, which is measured with Harison HIU-742A Inverter at 25°C

( $V_{BLMIN}$  is value at  $I_{BLMIN}$  and  $V_{BLMAX}$  is at  $I_{BLMAX}$ .)

4. The lamp frequency should be selected as different as possible from the horizontal synchronous frequency and its harmonics to avoid interference which may cause line flow on the display.

5. The inverter open voltage should be more than the maximum value of lamp starting voltage.

|                           |                                                                 |                   |
|---------------------------|-----------------------------------------------------------------|-------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>6 / 20 |
|---------------------------|-----------------------------------------------------------------|-------------------|

|                                                                                   |                 |      |            |
|-----------------------------------------------------------------------------------|-----------------|------|------------|
|  | PRODUCT GROUP   | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT | D    | 1999.12.03 |

6. Calculated value for reference ( $V_{BL} \times I_{BL}$ )

#### 4.0 OPTICAL SPECIFICATIONS

##### 4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and TOPCONE BM-5) and test unit shall be located at a distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^\circ$ . We refer to  $\theta_{\theta=0}$  ( $=\theta_3$ ) as the 3 o'clock direction (the "right"),  $\theta_{\theta=90}$  ( $=\theta_{12}$ ) as the 12 o'clock direction ("upward"),  $\theta_{\theta=180}$  ( $=\theta_9$ ) as the 9 o'clock direction ("left") and  $\theta_{\theta=270}$  ( $=\theta_6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\Phi$ , the center of the measuring spot on the display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be  $3.3 \pm 0.15\text{V}$  at  $25^\circ\text{C}$ . Optimum viewing angle direction is 6 o'clock.

##### 4.2 Optical Specifications

<Table 4. Optical Specifications>

| Parameter                  |            | Symbol        | Condition                         | Min.  | Typ.  | Max.  | Unit              | Remark |
|----------------------------|------------|---------------|-----------------------------------|-------|-------|-------|-------------------|--------|
| Viewing Angle Range        | Horizontal | $\theta_3$    | CR > 10                           | 40    |       |       | Deg.              | Note 1 |
|                            |            | $\theta_9$    |                                   | 40    |       |       | Deg.              |        |
|                            | Vertical   | $\theta_{12}$ |                                   | 10    |       |       | Deg.              |        |
|                            |            | $\theta_6$    |                                   | 30    |       |       | Deg.              |        |
| Luminance Contrast Ratio   |            | CR            | $\theta = 0^\circ$                | 150   | 200   |       |                   | Note 2 |
| Average Luminance of White |            | $Y_w$         | $\theta = 0^\circ$<br>IBL = 4.5mA | 85    | 100   |       | cd/m <sup>2</sup> | Note 3 |
| White Luminance Uniformity |            | $\Delta Y$    |                                   |       | 1.17  | 1.25  |                   | Note 4 |
| White Chromaticity         |            | $x_w$         | $\theta = 0^\circ$                | 0.272 | 0.302 | 0.332 |                   | Note 5 |
|                            |            | $y_w$         |                                   | 0.286 | 0.316 | 0.346 |                   |        |
| Reproduction of Color      | Red        | $x_R$         | $\theta = 0^\circ$                | 0.536 | 0.566 | 0.596 |                   |        |
|                            |            | $y_R$         |                                   | 0.307 | 0.337 | 0.367 |                   |        |
|                            |            | Green         |                                   | $x_G$ | 0.272 | 0.302 | 0.332             |        |
|                            | $y_G$      |               |                                   | 0.494 | 0.524 | 0.554 |                   |        |
|                            | Blue       |               |                                   | $x_B$ | 0.118 | 0.148 | 0.178             |        |
|                            |            | $y_B$         |                                   | 0.086 | 0.116 | 0.146 |                   |        |
| Response Time              | Rise       | $T_r$         | Ta= 25° C                         |       |       | 40    | ms                | Note 6 |
|                            | Decay      | $T_d$         | $\theta = 0^\circ$                |       |       | 40    | ms                |        |
| CRoss Talk                 |            | CT            | $\theta = 0^\circ$                |       |       | 2.0   | %                 | Note 7 |

|                           |                                                                 |                   |
|---------------------------|-----------------------------------------------------------------|-------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>7 / 20 |
|---------------------------|-----------------------------------------------------------------|-------------------|

|                                                                                   |                 |      |            |
|-----------------------------------------------------------------------------------|-----------------|------|------------|
|  | PRODUCT GROUP   | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT | D    | 1999.12.03 |

Note:

1. Viewing Angle is the angle at which the contrast ratio is greater than 10. The Viewing Angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE1 shown in Appendix).
2. Contrast measurements shall be made at viewing angle of  $\theta = 0^\circ$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (see FIGURE 1 shown in Appendix)  
Luminance Contrast Ratio (CR) is defined mathematically as  $CR = \text{Luminance when displaying a white raster} / \text{Luminance when displaying a black raster}$ .
3. Average Luminance of White is defined as arithmetic mean of five measurement points across the LCD surface. Luminance shall be measured with all pixels in the view field set to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.  
The Average Luminance of White is varied by the Back-light Current, IBL.
4. The White Luminance Uniformity on LCD surface is then expressed as :  $\Delta Y = \text{Maximum Luminance of five points} / \text{Minimum Luminance of five points}$  (see FIGURE 2).
5. The Color Chromaticity Coordinates specified in Table 4. shall be calculated from the spectral data measured with all pixels, red, green, blue and white. Measurements shall be made at the center of the panel.
6. The Electro-optical Response Time measurements shall be made as shown in FIGURE 3 (shown in Appendix) by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 0% to 90% is  $T_d$ , and 100% to 10% is  $T_r$ .
7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of the same area when center window area is driven dark (Refer to FIGURE 4).

|                           |                                                                 |                   |
|---------------------------|-----------------------------------------------------------------|-------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>8 / 20 |
|---------------------------|-----------------------------------------------------------------|-------------------|



|                                                                                   |                      |      |            |
|-----------------------------------------------------------------------------------|----------------------|------|------------|
|  | <b>PRODUCT GROUP</b> | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT      | D    | 1999.12.03 |

## 5.0 INTERFACE CONNECTION.

### 5.1 Electrical Interface Connection

The electronics interface connector is a model FI-SEB20P-HF manufactured by JAE or equivalent. The mating connector part number is FI-S20S-HF or equivalent. The connector interface pin assignments are listed in Table 5.

<Table 5. Pin Assignment for the Interface Connector>

| Terminal NO. | Symbol | Function                          |
|--------------|--------|-----------------------------------|
| 1            | VDD1   | Power Supply : +3.3V              |
| 2            | VDD2   | Power Supply : +3.3V              |
| 3            | VSS1   | Ground                            |
| 4            | VSS2   | Ground                            |
| 5            | RIN0-  | Transmission Data of 0 Negative - |
| 6            | RIN0+  | Transmission Data of 0 Positive + |
| 7            | VSS3   | Ground                            |
| 8            | RIN1-  | Transmission Data of 1 Negative - |
| 9            | RIN1+  | Transmission Data of 1 Positive + |
| 10           | VSS4   | Ground                            |
| 11           | RIN2-  | Transmission Data of 2 Negative - |
| 12           | RIN2+  | Transmission Data of 2 Positive + |
| 13           | VSS5   | Ground                            |
| 14           | CLK-   | Sampling Clock of Negative -      |
| 15           | CLK+   | Sampling Clock of Positive +      |
| 16           | VSS6   | Ground                            |
| 17           | NC1    | No Connection                     |
| 18           | NC2    | No Connection                     |
| 19           | VSS7   | Ground                            |
| 20           | VSS8   | Ground                            |

|                           |                                                                 |                   |
|---------------------------|-----------------------------------------------------------------|-------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>9 / 20 |
|---------------------------|-----------------------------------------------------------------|-------------------|

|                                                                                   |                      |      |            |
|-----------------------------------------------------------------------------------|----------------------|------|------------|
|  | <b>PRODUCT GROUP</b> | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT      | D    | 1999.12.03 |

## 5.2 Back-light Interface

The Back-light interface connector is a model BHSR-02VS-1 manufactured by JST or equivalent. The connector interface pin assignments are listed in Table 6.

<Table 6. Back-light Electrical Interface>

| Terminal No. | Symbol | Function                        |
|--------------|--------|---------------------------------|
| 1            | VL     | CCFL Power Supply(High Voltage) |
| 2            | GL     | CCFL Power Supply(GND Side)     |

## 6.0 SIGNAL TIMING SPECIFICATIONS

The specification of the signal timing parameter is listed in Table 7.

<Table 7. Signal Timing Specifications>


| ITEM                      | Symbol | Min.      | Typ.               | Max.      | Unit     | Remarks  |
|---------------------------|--------|-----------|--------------------|-----------|----------|----------|
| Frame Period              | t1     | 801 x t3  | 806 x t3<br>16.67  | 812 x t3  | --<br>ms | 60Hz     |
| Vertical Display Period   | t2     | 768 x t3  | 768 x t3<br>15.88  | 768 x t3  | --<br>ms |          |
| One Line Scanning Period  | t3     | 1152 x t5 | 1344 x t5<br>20.67 | 1364 x t5 | --<br>us | 48.38KHz |
| Horizontal Display Period | t4     | 1024 x t5 | 1024 x t5<br>15.75 | 1024 x t5 | --<br>us |          |
| Clock Time                | t5     |           | 15.38              |           | ns       | 65MHz    |
| Clock "L" Time            | t6     | (5.0)     | -                  | -         | ns       |          |
| Clock "H" Time            | t7     | (5.0)     | -                  | -         | ns       |          |
| Set up Time               | t8     | 3.0       | -                  | -         | ns       |          |
| Hold Time                 | t9     | 3.0       | -                  | -         | ns       |          |

|                           |                                                                 |                    |
|---------------------------|-----------------------------------------------------------------|--------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>10 / 20 |
|---------------------------|-----------------------------------------------------------------|--------------------|


|                                                                                   |                 |      |            |
|-----------------------------------------------------------------------------------|-----------------|------|------------|
|  | PRODUCT GROUP   | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT | D    | 1999.12.03 |

## 7.0 SIGNAL TIMING WAVEFORMS

### 7.1 Vertical Timing Waveforms

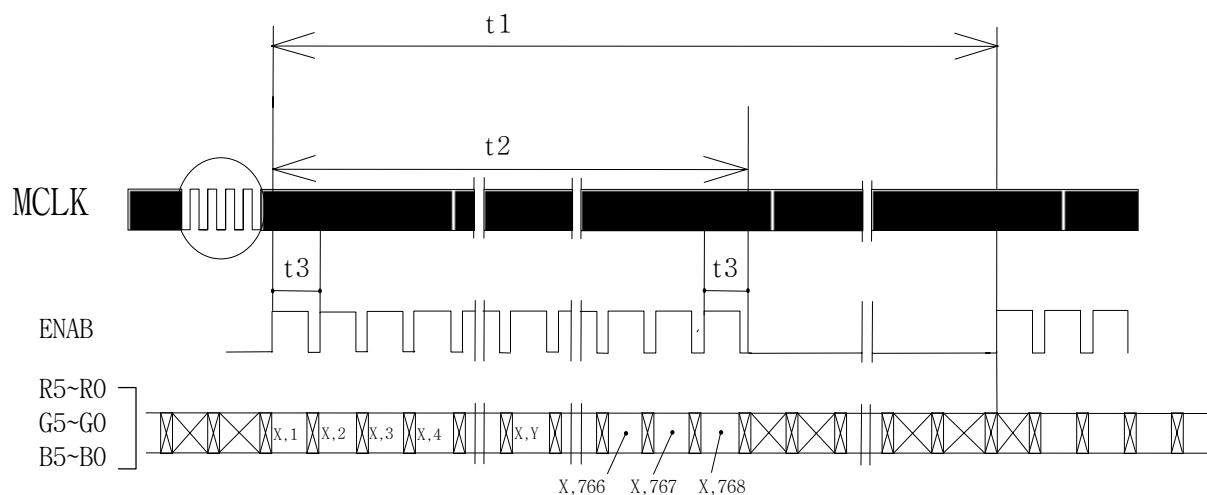

### 7.2 Horizontal Timing Waveforms

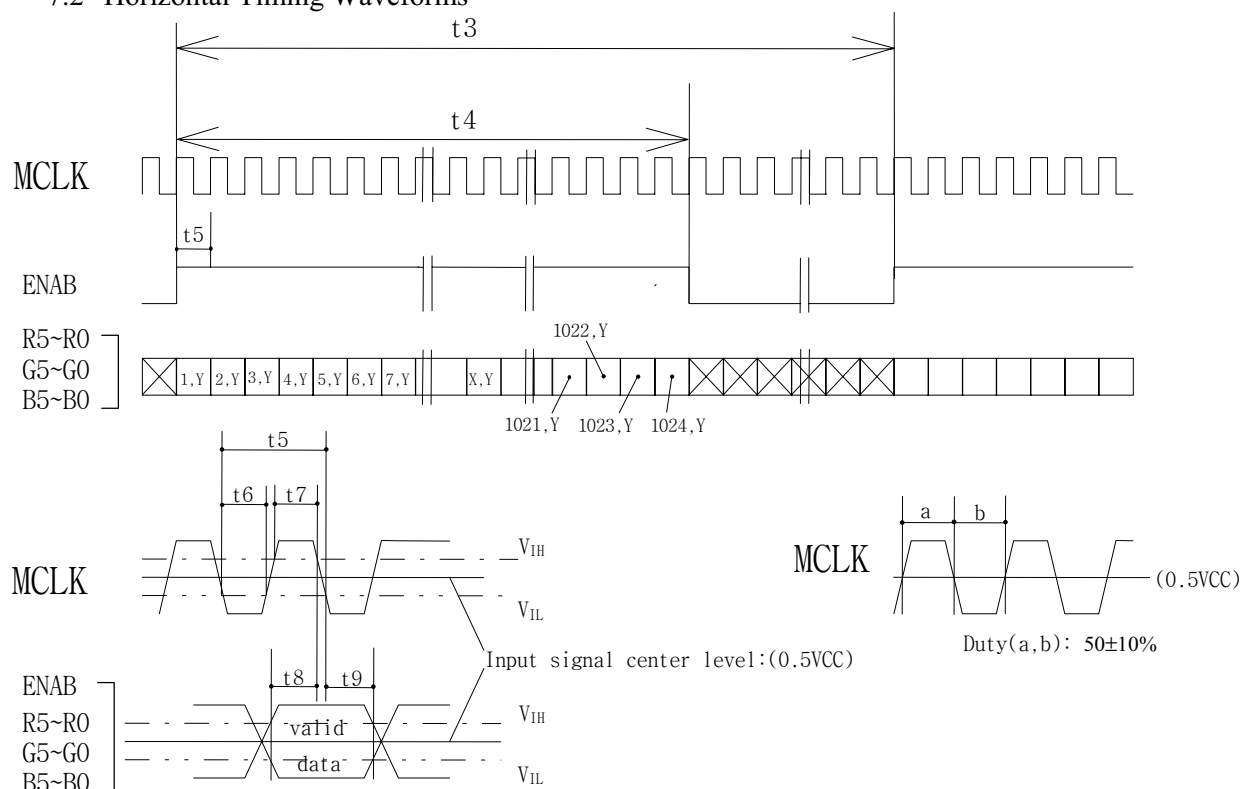

|                           |                                                                 |                    |
|---------------------------|-----------------------------------------------------------------|--------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>11 / 20 |
|---------------------------|-----------------------------------------------------------------|--------------------|

|                                                                                   |                 |      |            |
|-----------------------------------------------------------------------------------|-----------------|------|------------|
|  | PRODUCT GROUP   | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT | D    | 1999.12.03 |

## 8.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

Each color is displayed in sixty-four gray scales from 6 bits data signal input. A total of 262,144 colors are derived from the resultant 18 bits data. Table 8. shows the input signals, basic display colors and gray scale for each color.

<Table 8. Input signals, Basic display colors and Gray scale for each color.>


|                          | Colors &<br>Gray scale                  | Data signal |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------------|-----------------------------------------|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
|                          |                                         | R0          | R1 | R2 | R3 | R4 | R5 | G0 | G1 | G2 | G3 | G4 | G5 | B0 | B1 | B2 | B3 | B4 | B5 |
| Basic colors             | Black                                   | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | Blue                                    | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|                          | Green                                   | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | Light Blue                              | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
|                          | Red                                     | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | Purple                                  | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|                          | Yellow                                  | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | White                                   | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
| Gray scale<br>of<br>Red  | Black                                   | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | △                                       | 1           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | Darker                                  | 0           | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | △<br>▽                                  | ↓           |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                          | Brighter                                | 1           | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | ▽                                       | 0           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | Red                                     | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | Gray scale<br>of<br>Green               | Black       | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| △                        |                                         | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Darker                   |                                         | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| △<br>▽                   |                                         | ↓           |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
| Brighter                 |                                         | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
| ▽                        |                                         | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
| Green                    |                                         | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
| Gray scale<br>of<br>Blue |                                         | Black       | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                          | △                                       | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  |
|                          | Darker                                  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  |
|                          | △<br>▽                                  | ↓           |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                          | Brighter                                | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  | 1  |
|                          | ▽                                       | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  |
|                          | Blue                                    | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|                          | Gray scale<br>of<br>White<br>&<br>Black | Black       | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| △                        |                                         | 1           | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  |
| Darker                   |                                         | 0           | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  |
| △<br>▽                   |                                         | ↓           |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
| Brighter                 |                                         | 1           | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  |
| ▽                        |                                         | 0           | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  |
| White                    |                                         | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |

|                           |                                                                 |                    |
|---------------------------|-----------------------------------------------------------------|--------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>12 / 20 |
|---------------------------|-----------------------------------------------------------------|--------------------|

|                                                                                   |                 |      |            |
|-----------------------------------------------------------------------------------|-----------------|------|------------|
|  | PRODUCT GROUP   | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT | D    | 1999.12.03 |

## 9.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.

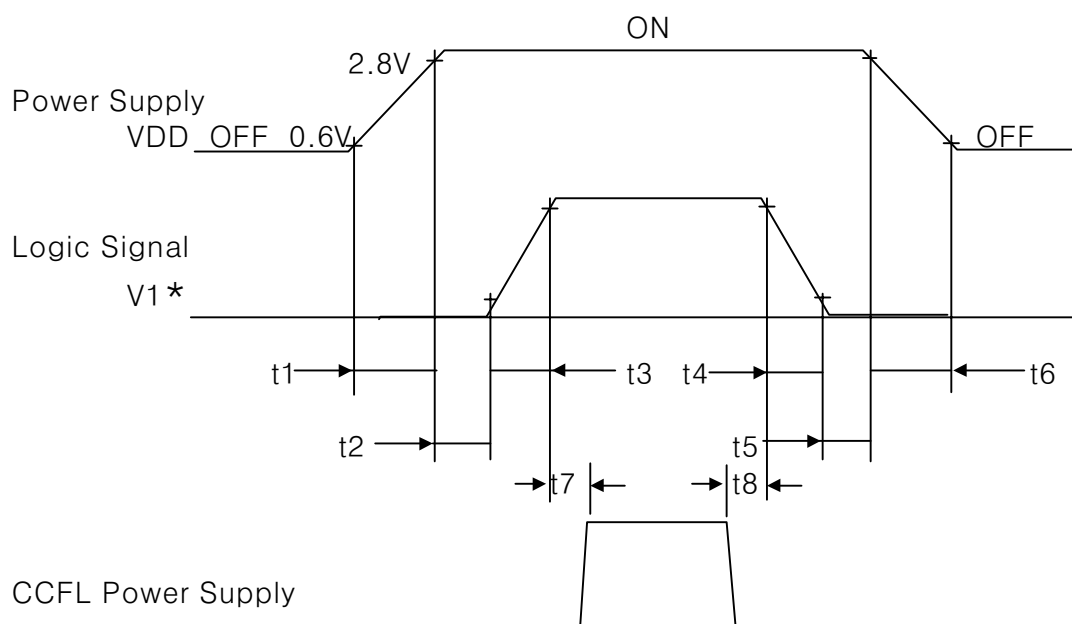

$$\begin{aligned}
 t1 &\leq 10 \text{ ms} & 0 \leq t4 &\leq 50 \text{ ms} \\
 0 \leq t2 &\leq 50 \text{ ms} & 0 \leq t5 &\leq 50 \text{ ms} \\
 0 \leq t3 &\leq 50 \text{ ms} & t6 &\leq 10 \text{ ms} \\
 100 \text{ ms} &\leq t7, t8 &&\leq 200 \text{ ms}
 \end{aligned}$$

\* SET  $0V \leq V1(t) \leq VDD(t)$

HERE,  $V1(t)$ ,  $VDD(t)$  indicate the transitive state of  $V1$ ,  $VDD$  when the power supply is turned ON or OFF.

NOTE : Do not keep the interface signal high-impedance when power is on.

|                           |                                                                 |                    |
|---------------------------|-----------------------------------------------------------------|--------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>13 / 20 |
|---------------------------|-----------------------------------------------------------------|--------------------|

|                                                                                   |                      |      |            |
|-----------------------------------------------------------------------------------|----------------------|------|------------|
|  | <b>PRODUCT GROUP</b> | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT      | D    | 1999.12.03 |

## 10.0 MECHANICAL CHARACTERISTICS

### 10.1 Dimensional Requirements

FIGURE 5 and 6 (located in Appendix) show mechanical outlines for the model HT13X13-213. Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters.>

| Parameter           | Specification                           | Unit   |
|---------------------|-----------------------------------------|--------|
| Active area         | 270.3 (H) x 202.8(V)                    | mm     |
| Number of pixels    | 1024(H) x 768(V)                        | pixels |
|                     | (1 pixel = R + G + B dot)               |        |
| Pixel pitch         | 0.264(H) x 0.264(V)                     | mm     |
| Pixel arrangement   | RGB Vertical stripe                     |        |
| Display colors      | 262,144                                 | colors |
| Display mode        | Normally white                          |        |
| Dimensional outline | 284.0±0.5(H) x 214.0±0.5(V) x 7.2(D)Typ | mm     |
| Weight              | 560 Typ                                 | g      |
| Back-light          | CCFL, Horizontal-lamp type              |        |

### 10.2 Mounting

See FIGURE 5 and 6. (shown in Appendix)

### 10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

### 10.4 Light Leakage

There shall not be visible light from the back-lighting system in the viewing angle around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

|                           |                                                                 |                    |
|---------------------------|-----------------------------------------------------------------|--------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>14 / 20 |
|---------------------------|-----------------------------------------------------------------|--------------------|

|                                                                                   |                      |      |            |
|-----------------------------------------------------------------------------------|----------------------|------|------------|
|  | <b>PRODUCT GROUP</b> | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT      | D    | 1999.12.03 |

## 11.0 RELIABILITY TEST

The Reliability test items and their conditions are shown in below.

<Table 10. Reliability test>

| No | Test Items                                      | Conditions                                                                                                |
|----|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| 1  | High temperature storage test                   | Ta = 60 °C, 240 hrs                                                                                       |
| 2  | Low temperature storage test                    | Ta = -20 °C, 240 hrs                                                                                      |
| 3  | High temperature & high humidity operation test | Ta = 50 °C, 80 %RH, 240 hrs                                                                               |
| 4  | High temperature operation test                 | Ta = 50 °C, 240 hrs                                                                                       |
| 5  | Low temperature operation test                  | Ta = 0 °C, 240 hrs                                                                                        |
| 6  | Thermal shock                                   | Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle                                                                   |
| 7  | Vibration test<br>(non-operating)               | Frequency : 10 ~ 500 Hz<br>Gravity/AMP : 1.5G X,Y,Z<br>Period : 15 min                                    |
| 8  | Shock test<br>(non-operating)                   | Gravity : 70G<br>Pulse width : 11 ms, half sine wave<br>Direction : ±X, ±Y, ±Z<br>once for each direction |
| 9  | Electrostatic discharge test                    | Air : 150 pF, 330Ω, 15 KV<br>Contact : 150 pF, 330Ω, 8 KV                                                 |

|                           |                                                                 |                    |
|---------------------------|-----------------------------------------------------------------|--------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>15 / 20 |
|---------------------------|-----------------------------------------------------------------|--------------------|

|                                                                                   |                      |      |            |
|-----------------------------------------------------------------------------------|----------------------|------|------------|
|  | <b>PRODUCT GROUP</b> | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT      | D    | 1999.12.03 |

## 12.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module
  - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
  - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
  - As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
  - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
  - Do not pull the interface connector in or out while the LCD module is operating.
  - Put the module display side down on a flat horizontal plane.
  - Handle connectors and cables with care.
- (3) Cautions for the operation
  - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
  - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- (4) Cautions for the atmosphere
  - Dew drop atmosphere should be avoided.
  - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics
  - Do not apply fixed pattern data signal to the LCD module at product aging.
  - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
  - Do not disassemble and/or re-assemble LCD module.
  - Do not re-adjust variable resistor or switch etc.
  - When returning the module for repair or etc, please pack the module not to be broken. We recommend to use the original shipping packages.

|                           |                                                                 |                    |
|---------------------------|-----------------------------------------------------------------|--------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>16 / 20 |
|---------------------------|-----------------------------------------------------------------|--------------------|



### 13.0 APPENDIX



**Figure 1. Measurement Set Up**

**Figure 2. Average Luminance Measurement & Uniformity Measurement Locations**


Figure 3. Response Time Testing





Figure 4. Cross Modulation Test Description

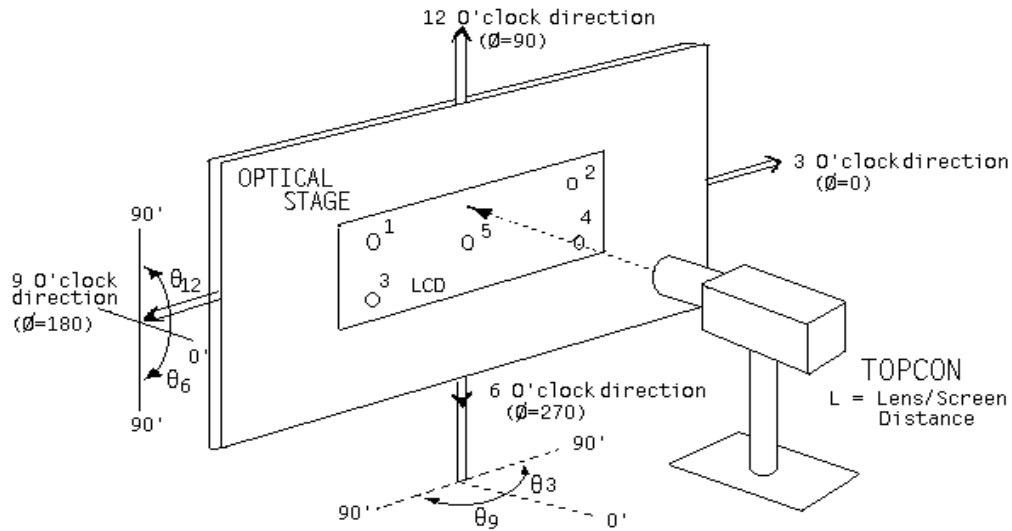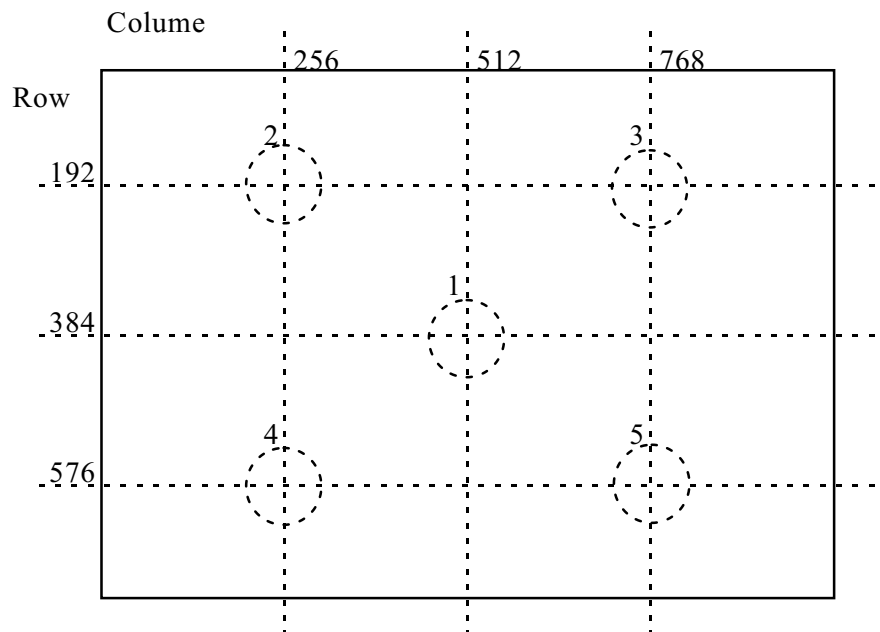

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_B} \right| \times 100$$

Where:

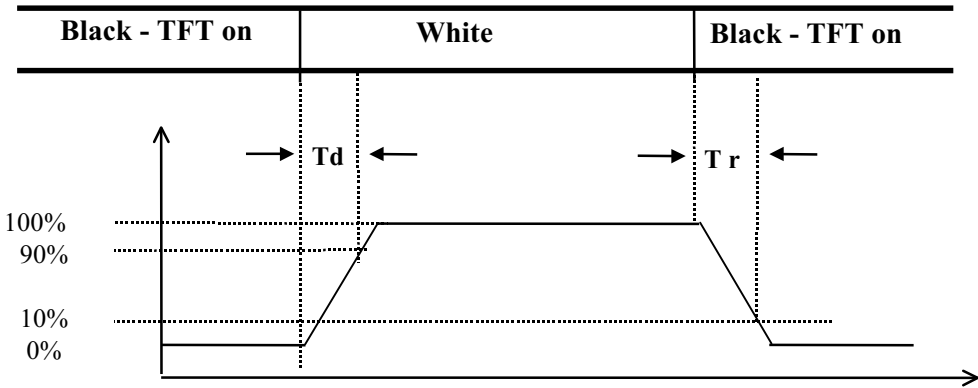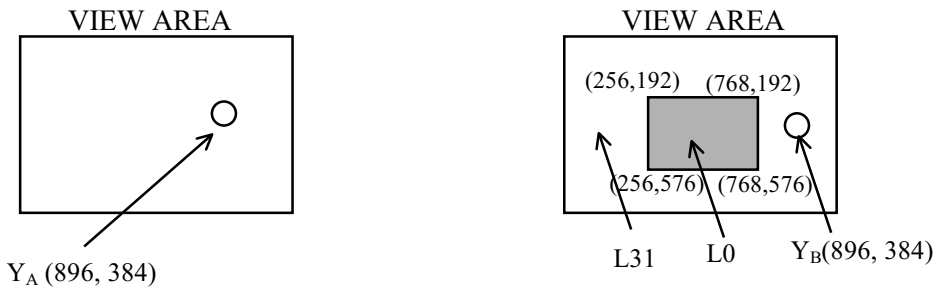$Y_A$  = Initial luminance of measured area ( $\text{cd/m}^2$ )

$Y_B$  = Subsequent luminance of measured area ( $\text{cd/m}^2$ )

The location measured will be exactly the same in both patterns




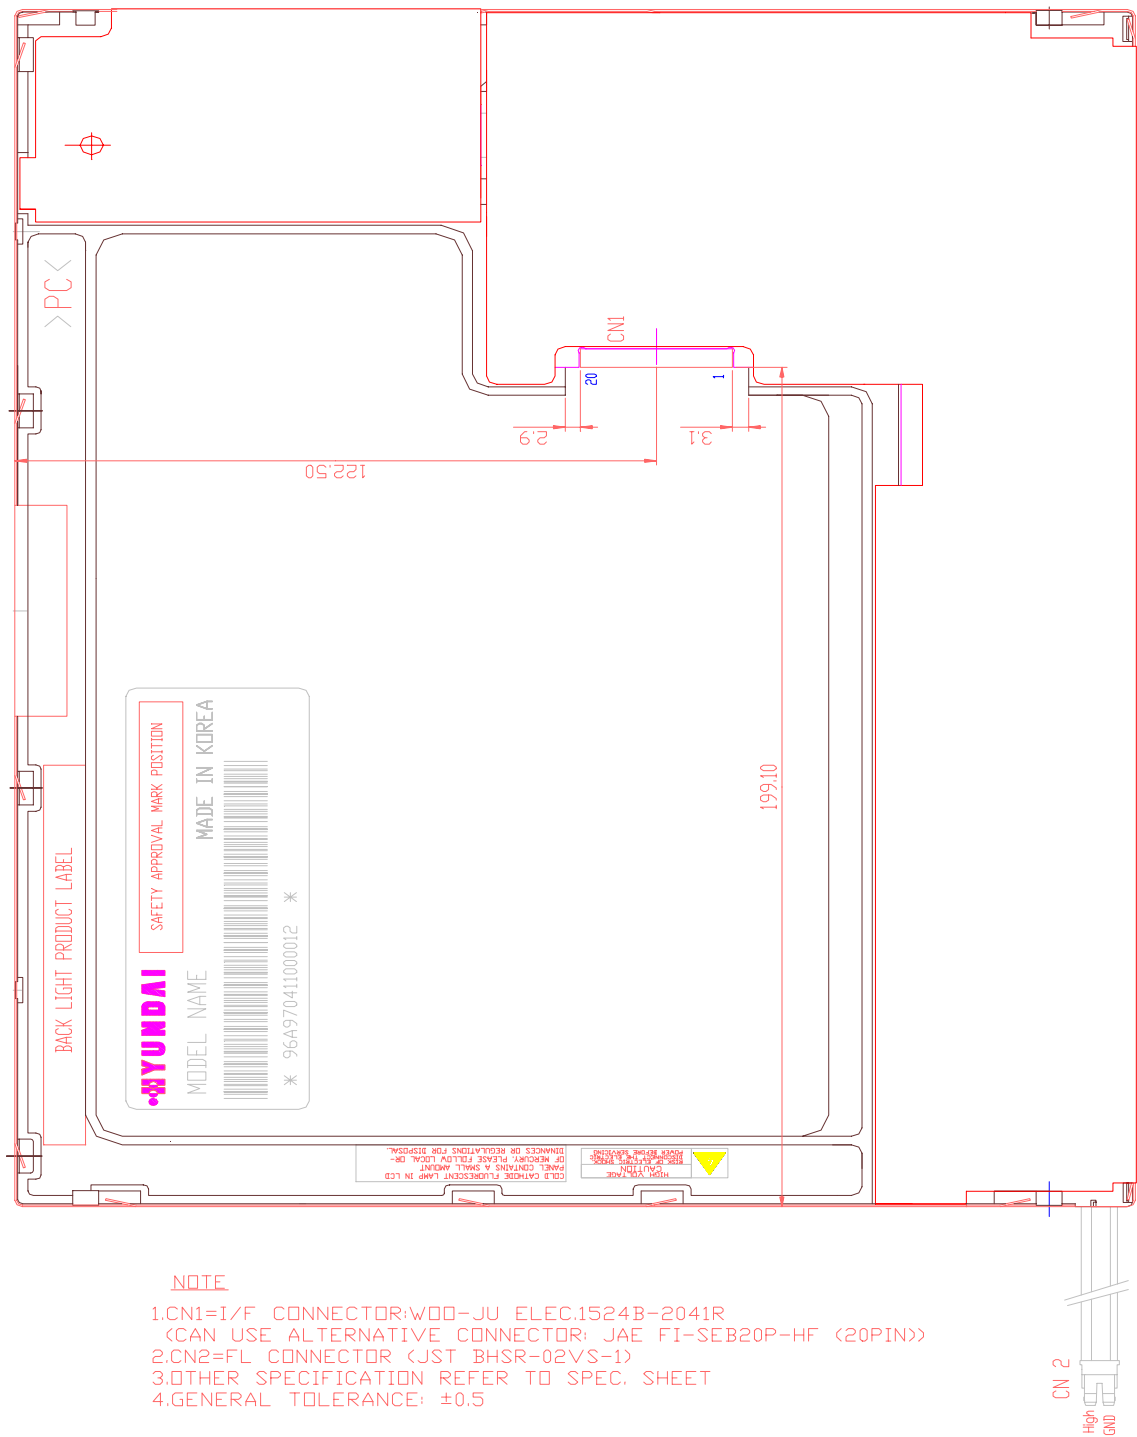
|                                                                                   |                 |      |            |
|-----------------------------------------------------------------------------------|-----------------|------|------------|
|  | PRODUCT GROUP   | REV. | ISSUE DATE |
|                                                                                   | TFT-LCD PRODUCT | D    | 1999.12.03 |

Figure 6. TFT-LCD Module Outline Dimensions (Rear view)



|                           |                                                                 |                    |
|---------------------------|-----------------------------------------------------------------|--------------------|
| SPEC. NUMBER<br>S864-1024 | SPEC. TITLE<br>HT13X13-213 Product Specification for<br>TFT-LCD | PAGE OF<br>20 / 20 |
|---------------------------|-----------------------------------------------------------------|--------------------|