



HT32L52343/HT32L52353 Datasheet

**32-Bit Arm® Cortex®-M0+ Ultra Low Power Microcontroller,
up to 128 KB Flash and 24 KB SRAM with 1 Msps ADC, CMP,
PDMA, DIV, USART, UART, SPI, I²C, SCI, MCTM, GPTM, SCTM,
BFTM, CRC, AES, RNG, UID, ERTC, WDT and USB2.0 FS**

Revision: V1.00 Date: January 30, 2026

www.holtek.com

1 General Description

The Holtek HT32L52343/52353 devices are high performance, ultra-low power consumption 32-bit microcontrollers based around an Arm® Cortex®-M0+ processor core. The Cortex®-M0+ is a next-generation processor core which is tightly coupled with Nested Vectored Interrupt Controller (NVIC), SysTick timer and advanced debug support.

The devices operate at a frequency of up to 48 MHz with a Flash accelerator to obtain maximum efficiency. It provides up to 128 KB of embedded Flash memory for code / data storage and up to 24 KB of embedded SRAM memory for system operation and application program usage. A variety of peripherals, such as PDMA, Hardware Divider DIV, ADC, CMP, USB2.0 FS, I²C, USART, UART, SPI, SCI, MCTM, GPTM, SCTM, BFTM, CRC-16/32, AES-128, RNG, 96-bit Unique ID, ERTC, WDT and SW-DP (Serial Wire Debug Port), etc., are also implemented in the device series. Several power saving modes provide the flexibility for maximum optimization between wakeup latency and power consumption, an especially important consideration in ultra-low power applications.

The above features ensure that the devices are suitable for use in a wide range of applications, especially in areas such as white goods application controllers, power monitors, alarm systems, handheld devices, personal medical devices, home automation, industrial sensors and so on.

arm CORTEX

2 Features

Core

- 32-bit Arm® Cortex®-M0+ processor core
- Up to 48 MHz operating frequency
- Single-cycle multiplication
- Integrated Nested Vectored Interrupt Controller (NVIC)
- 24-bit SysTick timer

The Cortex®-M0+ processor is a very low gate count, highly energy efficient processor that is intended for microcontroller and deeply embedded applications that require an area optimized, low-power processor. The processor is based on the ARMv6-M architecture and supports Thumb® instruction sets, single-cycle I/O ports, hardware multiplier and low latency interrupt response time.

On-Chip Memory

- Up to 128 KB on-chip Flash memory for instruction/data and option byte storage
- Up to 24 KB on-chip SRAM
- Supports multiple boot modes

The Arm® Cortex®-M0+ processor access and debug access share the single external interface to external AHB peripherals. The processor access takes priority over debug access. The maximum address range of the Cortex®-M0+ is 4 GB since it has a 32-bit bus address width. Additionally, a pre-defined memory map is provided by the Cortex®-M0+ processor to reduce the software complexity of repeated implementation by different device vendors. However, some regions are used by the Arm® Cortex®-M0+ system peripherals. Refer to the Arm® Cortex®-M0+ Technical Reference Manual for more information. Figure 2 in the Overview chapter shows the memory map of the HT32L52343/52353 devices, including code, SRAM, peripheral and other pre-defined regions.

Flash Memory Controller – FMC

- Flash accelerator for maximum efficiency
- 32-bit word programming with In System Programming (ISP) and In Application Programming (IAP)
- Flash protection capability to prevent illegal access

The Flash Memory Controller, FMC, provides all the necessary functions and a cache buffer for the embedded on-chip Flash Memory. Since the access speed of the Flash Memory is slower than the CPU, a wide access interface with a cache buffer is provided for the Flash Memory in order to reduce the CPU waiting time which will cause CPU instruction execution delays. Flash Memory word program/page erase functions are also provided.

Reset Control Unit – RSTCU

- Supply supervisor
 - Power On Reset / Power Down Reset – POR / PDR
 - Brown-Out Detector – BOD
 - Programmable Low Voltage Detector – LVD

The Reset Control Unit, RSTCU, has three kinds of reset, a power on reset, a system reset and an APB unit reset. The power on reset, known as a cold reset, resets the full system during power up. A system reset resets the processor core and peripheral IP components with the exception of the SW-DP controller. The resets can be triggered by an external signal, internal events and the reset generators.

Clock Control Unit – CKCU

- External 4 to 16 MHz crystal oscillator
- External 32,768 Hz crystal oscillator
- Internal 8 MHz RC oscillator trimmed to ± 1 % accuracy at 3.3 V operating voltage and 25 °C operating temperature
- Internal 32 kHz RC oscillator
- Integrated system clock PLL
- Independent clock divider and gating bits for peripheral clock sources

The Clock Control unit, CKCU, provides a range of oscillator and clock functions. These include a High Speed Internal RC oscillator (HSI), a High Speed External crystal oscillator (HSE), a Low Speed Internal RC oscillator (LSI), a Low Speed External crystal oscillator (LSE), a Phase Lock Loop (PLL), an HSE clock monitor, clock pre-scaler, clock multiplexers, APB clock divider and gating circuitry. The clocks of the AHB, APB and Cortex®-M0+ are derived from the system clock (CK_SYS) which can source from the HSI, HSE, LSI, LSE or system PLL. The Watchdog Timer uses either LSI or LSE as its clock source. The Enhanced Real-Time Clock (ERTC) uses LSI, LSE or HSE as its clock source.

Power Management – PWRCU

- Single V_{DD} power supply: 1.65 V to 3.6 V
- Integrated 1.5 V LDO regulator for MCU core, peripherals and memories power supply
- V_{DD} power supply for ERTC
- V_{DD} and V_{CORE} power domains
- Six power saving modes: Sleep, Deep-Sleep1, Deep-Sleep2, Deep-Sleep3, Power-Down, Deep Power-Down

Power consumption can be regarded as one of the most important issues for many embedded system applications. Accordingly the Power Control Unit, PWRCU, in these devices provides many types of power saving modes such as Sleep, Deep-Sleep1, Deep-Sleep2, Deep-Sleep3, Power-Down and Deep Power-Down modes. These operating modes reduce the power consumption and allow the application to achieve the best trade-off between the conflicting demands of CPU operating time, speed and power consumption.

External Interrupt / Event Controller – EXTI

- Up to 16 EXTI lines with configurable trigger sources and types
- All GPIO pins can be selected as EXTI trigger source
- Source trigger type includes high level, low level, negative edge, positive edge or both edges
- Individual interrupt enable, wakeup enable and status bits for each EXTI line
- Software interrupt trigger mode for each EXTI line
- Integrated deglitch filter for short pulse blocking

The External Interrupt/Event Controller, EXTI, comprises 16 edge detectors which can generate wakeup events or interrupt requests independently. Each EXTI line can also be masked independently.

Analog to Digital Converter – ADC

- 12-bit SAR ADC engine
- Up to 1 Msps conversion rate
- Up to 12 external analog input channels
- Integrated bandgap voltage (V_{BG}) for internal analog input channel
- External reference voltage input possibility
- Conversion range: $V_{REF+} \sim V_{SSA}$

A 12-bit multi-channel Analog to Digital Converter is integrated in the devices. There are multiplexed channels, which include up to 12 external analog signal channels and 4 internal channels which can be measured. If the input voltage is required to remain within a specific threshold window, an Analog Watchdog function will monitor and detect these signals. An interrupt will then be generated to inform the device that the input voltage is not within the preset threshold levels. There are three conversion modes to convert an analog signal to digital data. The ADC can be operated in one shot, continuous and discontinuous conversion modes.

The internal voltage reference generator (VREF) which can provide a stable bandgap voltage (V_{BG}) for the A/D Converter is internally connected to the ADC input channel. The precise voltage of the V_{BG} is individually measured for each part by Holtek during production test.

The internal temperature sensor (TS) can be used to measure the junction temperature (T_j) of the devices. The temperature sensor is internally connected to the ADC input channels which are used to convert the sensor output voltage to a digital value. The temperature sensor output voltage changes linearly with temperature.

Comparator – CMP

- Two rail-to-rail comparators
- Configurable negative inputs used for flexible voltage selection
 - External CN pin
 - Internal 8-bit CVR output
- Programmable hysteresis
- Programmable respond speed and consumption

- Comparator output can be routed to I/O pin or to timers or ADC trigger inputs
- 8-bit CVR can be configured to dedicated I/O for voltage reference
- Comparator has interrupt generation capability with wakeup from Sleep, Deep Sleep1, Deep Sleep2 or Deep Sleep3 mode through the EXTI controller

Two general purpose comparators, CMP, are implemented within the devices. They can be configured either as standalone comparators or combined with the different kinds of peripheral IP. Each comparator is capable of asserting interrupts to the NVIC or waking up the CPU from the Sleep, Deep Sleep1, Deep Sleep2 or Deep Sleep3 mode through the EXTI wakeup event management unit.

I/O Ports – GPIO

- Up to 54 GPIOs
- Port A, B, C, D are mapped to 16-Line EXTI interrupts
- Almost all I/O pins have configurable output driving current
- Partial I/O pins have 5 V-tolerant capability

There are up to 54 General Purpose I/O pins, GPIO, for the implementation of logic input/output functions. Each of the GPIO ports has a series of related control and configuration registers to maximize flexibility and to meet the requirements of a wide range of applications.

The GPIO ports are pin-shared with other alternative functions to obtain maximum functional flexibility on the package pins. The GPIO pins can be used as alternative functional pins by configuring the corresponding registers regardless of the input or output pins. The external interrupts on the GPIO pins of the device have related control and configuration registers in the External Interrupt Control Unit, EXTI.

Motor Control Timer – MCTM

- 16-bit up, down, up/down auto-reload counter
- Up to 4 independent channels
- 16-bit programmable prescaler that allows division of the prescaler clock source by any factor between 1 and 65536 to generate the counter clock frequency
- Input Capture function
- Compare Match Output
- PWM waveform generation with Edge-aligned and Center-aligned Counting
- Single Pulse Mode Output
- Complementary Outputs with programmable dead-time insertion
- Supports 3-phase motor control and hall sensor interface
- Break input to force the timer's output signals into a reset or fixed condition

The Motor Control Timer Module, MCTM, consists of a single 16-bit up/down counter, four 16-bit Capture/Compare Registers (CCRs), one 16-bit Counter Reload Register (CRR), 8-bit repetition counter and several control/status registers. It can be used for a variety of purposes including measuring the pulse widths of input signals or generating output waveforms such as compare match outputs, PWM outputs or complementary PWM outputs with dead-time insertion. The MCTM is capable of offering full functional support for motor control, hall sensor interfacing and brake input.

General-Purpose Timer – GPTM

- 16-bit up, down, up/down auto-reload counter
- Up to 4 independent channels for each timer
- 16-bit programmable prescaler that allows division of the prescaler clock source by any factor between 1 and 65536 to generate the counter clock frequency
- Input Capture function
- Compare Match Output
- PWM waveform generation with Edge-aligned and Center-aligned Counting
- Single Pulse Mode Output
- Encoder interface controller with two inputs using quadrature decoder

The General-Purpose Timer Module, GPTM, consists of one 16-bit up/down-counter, four 16-bit Capture/Compare Registers (CCRs), one 16-bit Counter Reload Register (CRR) and several control/status registers. It can be used for a variety of purposes including general time measurement, input signal pulse width measurement, output waveform generation such as single pulse generation or PWM output generation. The GPTM supports an Encoder Interface using a quadrature decoder with two inputs.

Single Channel Timer – SCTM

- 16-bit auto-reload up-counter
- One channel for each timer
- 16-bit programmable prescaler that allows division of the prescaler clock source by any factor between 1 and 65536 to generate the counter clock frequency
- Input Capture function
- Compare Match Output
- PWM waveform generation with Edge-aligned

The Single Channel Timer Module, SCTM, consists of one 16-bit up-counter, one 16-bit Capture/Compare Register (CCR), one 16-bit Counter Reload Register (CRR) and several control/status registers. It can be used for a variety of purposes including general timer, input signal pulse width measurement or output waveform generation such as PWM output.

Basic Function Timer – BFTM

- 32-bit compare match count-up counter - no I/O control
- One shot mode - counter stops counting when compare match occurs
- Repetitive mode - counter restarts when compare match occurs

The Basic Function Timer Module, BFTM, is a simple 32-bit up-counting counter designed to measure time intervals, generate one shots or generate repetitive interrupts. The BFTM can operate in two functional modes which are repetitive and one shot modes. In the repetitive mode, the counter will be restarted at each compare match event. The BFTM also supports a one shot mode which will force the counter to stop counting when a compare match event occurs.

Watchdog Timer – WDT

- 12-bit down counter with 3-bit prescaler
- Provides reset to the system
- Programmable watchdog timer window function
- Register write protection function

The Watchdog Timer is a hardware timing circuitry that can be used to detect a system lock-up due to software trapped in a deadlock. It includes a 12-bit count-down counter, a prescaler, a WDT delta value register, a WDT operation control circuitry and a WDT protection mechanism. If the software does not reload the counter value before a Watchdog Timer underflow occurs, a reset will be generated when the counter underflows. In addition, a reset is also generated if the software reloads the counter before it reaches a delta value. It means that the counter reload must occur when the Watchdog timer value has a value within a limited window using a specific method. The Watchdog Timer counter can be stopped when the processor is in the debug mode. The register write protection function can be enabled to prevent an unexpected change in the Watchdog timer configuration.

Enhanced Real-Time Clock – ERTC

- Calendar with second, minute, hour (in 12 or 24 format), day, week, month and year in BCD (binary-coded decimal) format
- Programmable alarms with interrupt functions
- Automatic wakeup unit generating a periodic flag that triggers an automatic wakeup interrupt
- Digital calibration circuit with 0.95 ppm resolution
- Timestamp function for event saving
- ERTC alternate function output

The Enhanced Real-Time Clock, ERTC, is an independent BCD timer/counter. The ERTC provides a time-of-day clock / calendar with programmable alarm interrupts. As long as the supply voltage remains within its operating range, the ERTC will continually run, regardless of the device status. The ERTC operates in the V_{DD} power domain and provides an automatic wakeup to manage all power saving modes.

Inter-integrated Circuit – I²C

- Supports both master and slave modes with a frequency of up to 1 MHz
- Provides an arbitration function and clock synchronization
- Supports 7-bit and 10-bit addressing modes and general call addressing
- Supports slave multi-addressing mode using address mask function

The I²C is an internal circuit allowing communication with an external I²C interface which is an industry standard two line serial interface used for connection to external hardware. These two serial lines are known as a serial data line, SDA, and a serial clock line, SCL. The I²C module provides three data transfer rates: 100 kHz in the Standard mode, 400 kHz in the Fast mode and 1 MHz in the Fast plus mode. The SCL period generation register is used to setup different kinds of duty cycle implementations for the SCL pulse.

The SDA line which is connected directly to the I²C bus is a bidirectional data line between the master and slave devices and is used for data transmission and reception. The I²C also has an arbitration detection and clock synchronization to prevent situations where more than one master attempts to transmit data to the I²C bus at the same time.

Serial Peripheral Interface – SPI

- Supports both master and slave modes
- Frequency of up to ($f_{\text{PCLK}}/2$) MHz for the master mode and ($f_{\text{PCLK}}/3$) MHz for the slave mode
- FIFO Depth: 8 levels
- Multi-master and multi-slave operation

The Serial Peripheral Interface, SPI, provides an SPI protocol data transmit and receive function in both master and slave modes. The SPI interface uses 4 pins, among which are serial data input and output lines MISO and MOSI, the clock line SCK, and the slave select line SEL. One SPI device acts as a master who controls the data flow using the SEL and SCK signals to indicate the start of the data communication and the data sampling rate. To receive the data bits, the streamlined data bits are latched on a specific clock edge and stored in the data register or in the RX FIFO. Data transmission is carried out in a similar way but with the reverse sequence. The mode fault detection provides a capability for multi-master applications.

Universal Synchronous Asynchronous Receiver Transmitter – USART

- Supports both asynchronous and clocked synchronous serial communication modes
- Programmable baud rate clock frequency up to ($f_{\text{PCLK}}/16$) MHz for asynchronous mode and ($f_{\text{PCLK}}/8$) MHz for synchronous mode
- Full duplex communication
- Fully programmable serial communication characteristics including:
 - Word length: 7, 8 or 9-bit character
 - Parity: Even, odd or no-parity bit generation and detection
 - Stop bit: 1 or 2 stop bits generation
 - Bit order: LSB-first or MSB-first transfer
- Error detection: Parity, overrun and frame error
- Auto hardware flow control mode - RTS, CTS
- IrDA SIR encoder and decoder
- RS485 mode with output enable control
- FIFO Depth: 8-level for both receiver and transmitter

The Universal Synchronous Asynchronous Receiver Transceiver, USART, provides a flexible full duplex data exchange using synchronous or asynchronous data transfer. The USART is used to translate data between parallel and serial interfaces, and is commonly used for RS232 standard communication. The USART peripheral function supports four types of interrupt including Line Status Interrupt, Transmitter FIFO Empty Interrupt, Receiver Threshold Level Reaching Interrupt and Time Out Interrupt. The USART module includes an 8-level transmitter FIFO, (TX_FIFO) and an 8-level receiver FIFO (RX_FIFO). The software can detect a USART error status by reading the USART Status & Interrupt Flag Register, USRSIFR. The status includes the type and the condition

of the transfer operations as well as several error conditions resulting from Parity, Overrun, Framing and Break events.

Universal Asynchronous Receiver Transmitter – UART

- Asynchronous serial communication operating baud-rate clock frequency up to $f_{CLK}/16$ MHz
- Full duplex communication
- Fully programmable serial communication characteristics including:
 - Word length: 7, 8 or 9-bit character
 - Parity: Even, odd or no-parity bit generation and detection
 - Stop bit: 1 or 2 stop bits generation
 - Bit order: LSB-first or MSB-first transfer
- Error detection: Parity, overrun, and frame error

The Universal Asynchronous Receiver Transceiver, UART, provides a flexible full duplex data exchange using asynchronous transfer. The UART is used to translate data between parallel and serial interfaces, and is commonly used for RS232 standard communication. The UART peripheral function supports Line Status Interrupt. The software can detect a UART error status by reading the UART Status & Interrupt Flag Register, URSIFR. The status includes the type and the condition of transfer operations as well as several error conditions resulting from Parity, Overrun, Framing and Break events.

Smart Card Interface – SCI

- Supports ISO 7816-3 standard
- Character Transfer mode
- Single transmit buffer and single receive buffer
- 11-bit ETU (Elementary Time Unit) counter
- 9-bit guard time counter
- 24-bit general purpose waiting time counter
- Parity generation and check functions
- Automatic character retry on parity error detection in transmission and reception modes
- Supports PDMA access at a transmission or reception completion

The Smart Card Interface, SCI, is compatible with the ISO 7816-3 standard. This interface includes functions for Card Insertion/Removal detection, SCI data transfer control logic and data buffers, internal Timer Counters and corresponding control logic circuits to perform the required Smart Card operations. The Smart Card interface acts as a Smart Card Reader to facilitate communication with the external Smart Card. The overall functions of the Smart Card interface are controlled by a series of registers including control and status registers together with several corresponding interrupts which are generated to get the attention of the microcontroller for SCI transfer status.

Cyclic Redundancy Check – CRC

- Supports CRC16 polynomial: 0x8005,
 $X^{16}+X^{15}+X^2+1$
- Supports CCITT CRC16 polynomial: 0x1021,
 $X^{16}+X^{12}+X^5+1$
- Supports IEEE-802.3 CRC32 polynomial: 0x04C11DB7,
 $X^{32}+X^{26}+X^{23}+X^{22}+X^{16}+X^{12}+X^{11}+X^{10}+X^8+X^7+X^5+X^4+X^2+X+1$
- Supports 1's complement, byte reverse & bit reverse operation on data and checksum
- Supports byte, half-word & word data size
- Programmable CRC initial seed value
- CRC computation executed in 1 AHB clock cycle for 8-bit data and 4 AHB clock cycles for 32-bit data
- Supports PDMA to complete a CRC computation of a block of memory

The CRC calculation unit is an error detection technique test algorithm which is used to verify data transmission or storage data correctness. A CRC calculation takes a data stream or a block of data as its input and generates a 16- or 32-bit output remainder. Ordinarily, a data stream is suffixed by a CRC code and used as a checksum when being sent or stored. Therefore, the received or restored data stream is calculated by the same generator polynomial as described above. If the new CRC code result does not match the one calculated earlier, that means the data stream contains a data error.

Peripheral Direct Memory Access – PDMA

- 6 channels with trigger source grouping
- 8-bit, 16-bit and 32-bit width data transfer
- Supports Address increment, decrement and fixed modes
- 4-level programmable channel priority
- Auto reload mode
- Supports trigger sources:
ADC, SPI, USART, UART, SCI, AES, I²C, MCTM, GPTM and software request

The Peripheral Direct Memory Access controller, PDMA, moves data between the peripherals and the system memory on the AHB bus. Each PDMA channel has a source address, destination address, block length and transfer count. The PDMA can exclude the CPU intervention and avoid interrupt service routine execution. It improves system performance as the software does not need to connect each data movement operation.

Universal Serial Bus Device Controller – USB

- Complies with USB 2.0 Full-Speed (12 Mbps) specification
- On-chip USB full-speed transceiver
- 1 control endpoint (EP0) for control transfer
- 3 single-buffered endpoints for bulk and interrupt transfer
- 4 double-buffered endpoints for bulk, interrupt and isochronous transfer
- 1,024 bytes EP_SRAM used as the endpoint data buffers

The USB device controller is compliant with the USB 2.0 full-speed specification. There is one control endpoint known as Endpoint 0 and seven configurable endpoints. A 1024-byte EP_SRAM is used as the endpoint buffer. Each endpoint buffer size is programmable using corresponding registers, which provides maximum flexibility for various applications. The integrated USB full-speed transceiver helps to minimize overall system complexity and cost. The USB also contains the suspend and resume features to meet low-power consumption requirement.

Advanced Encryption Standard – AES

- Supports AES Encrypt / Decrypt function
- Supports AES ECB/CBC/CTR mode
- Supports Key Size of 128 bits
- Supports 4 words Initial Vector for CBC and CTR modes
- 4 × 32 bits AES data buffer – each IN and OUT FIFO capacity
- Supports PDMA interface
- Supports Word Data Swap function

The AES core supports both encryption and decryption functions and supports 128-bit input data. It should be noted that hardware does not pad out any input data bits, therefore users need to do pad action by software at first.

Hardware Divider – DIV

- Signed / unsigned 32-bit divider
- Calculate in 8 clock cycles, load in 1 clock cycle
- Division by zero error Flag

The divider is the truncated division and requires a software triggered start signal by controlling register the “START” bit in the control register. The divider calculation complete flag will be set to 1 after 8 clock cycles, however, if the divisor register data is zero during the calculation, the division by zero error flag will be set to 1.

Random Number Generator – RNG

- Includes an internal entropy source that is based on a chain of digital inverters
- Built-in hardware tests for autocorrelation and Continuous Random Number Generation Testing (CRNGT) as required by the following standards:
 - FIPS 140-2, Security Requirements for Cryptographic Modules
 - AIS-31, Functionality Classes and Evaluation Methodology for Random Number Generators

Unique Identifier – UID

- Total 96-bit UID is unique and not duplicate with other HT32 MCU devices
- It is unchangeable and determined by MCU manufacturer

Debug Support

- Serial Wire Debug Port – SW-DP
- 4 comparators for hardware breakpoint or code / literal patch
- 2 comparators for hardware watch points

Package and Operation Temperature

- 32-pin QFN and 48/64-pin LQFP packages
- Operation temperature range: -40 °C to 105 °C

3 Overview

Device Information

Table 1. Features and Peripheral List

Peripherals		HT32L52343	HT32L52353
Main Flash (KB)		64	127
Option Byte Flash (KB)		1	1
SRAM (KB)		12	24
Timers	MCTM	1	
	GPTM	2	
	SCTM	2	
	BFTM	2	
	ERTC	1	
	WDT	1	
Communication	USB	1	
	SPI	2	
	USART	2	
	UART	2	
	I ² C	2	
	SCI (ISO 7816-3)	2	
Hardware Divider		1	
PDMA		6 Channels	
AES		1	
RNG		1	
CRC-16/32		1	
EXTI		16	
12-bit ADC		1	
Number of channels		12 External Channels	
Comparator		2	
GPIO		Up to 54	
CPU frequency		Up to 48 MHz	
Operating voltage		1.65 V ~ 3.6 V	
Operating temperature		-40 °C ~ 105 °C	
Package		32-pin QFN, 48/64-pin LQFP	

Block Diagram

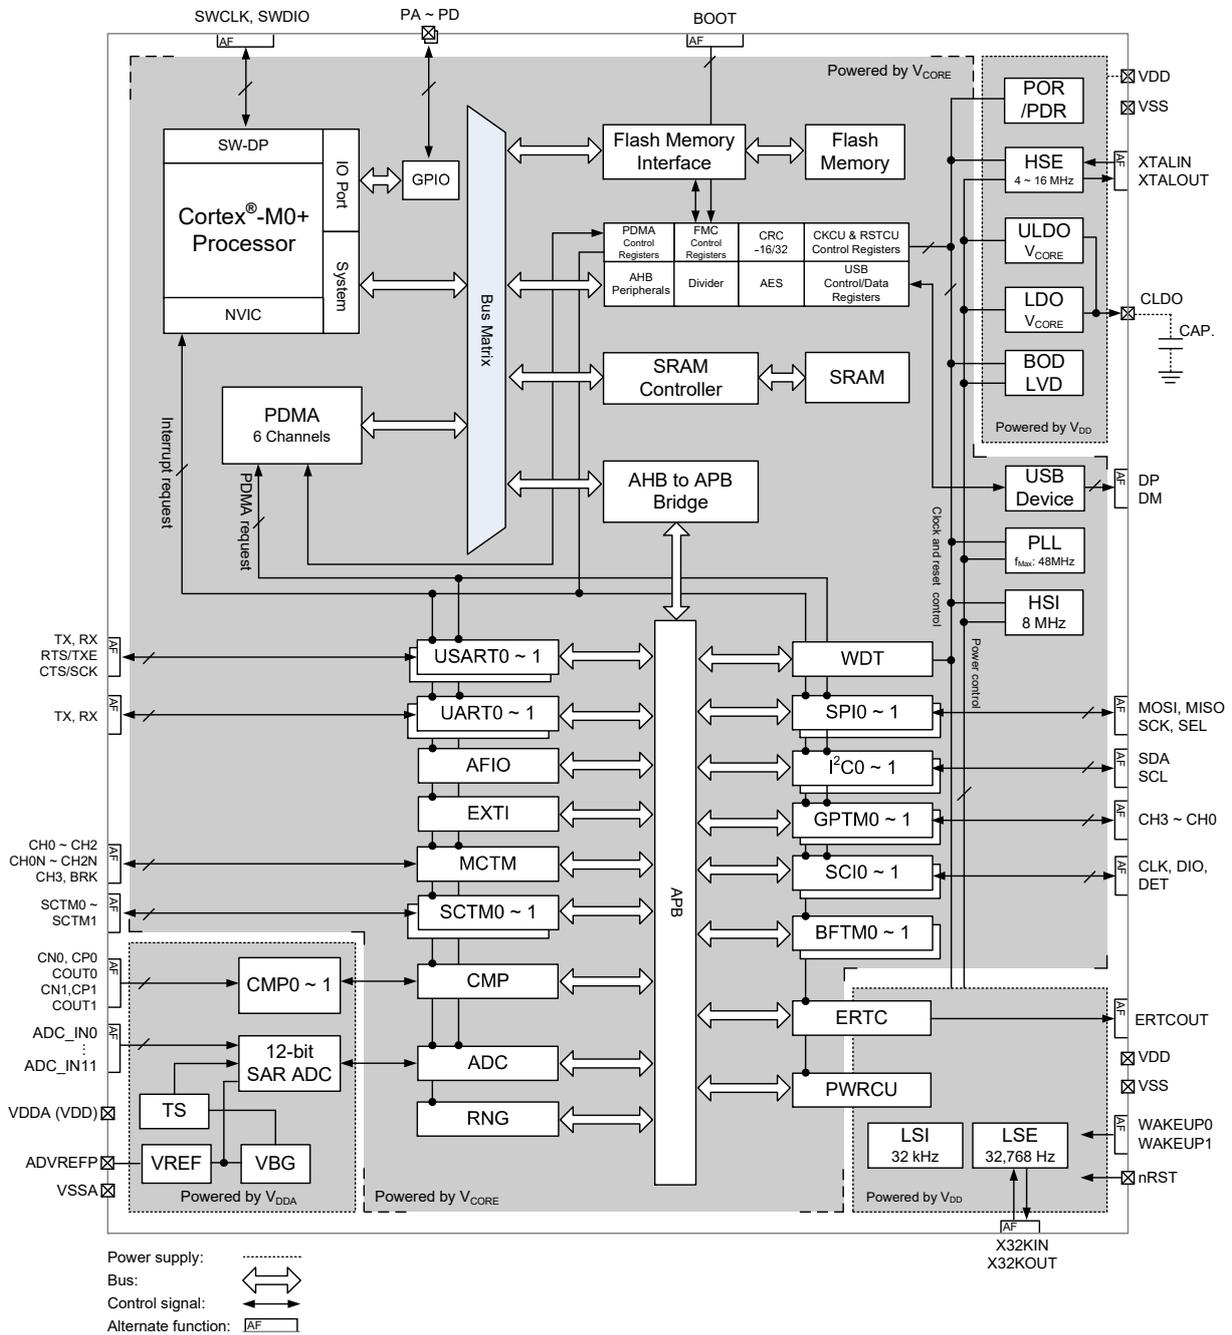


Figure 1. Block Diagram

Memory Map

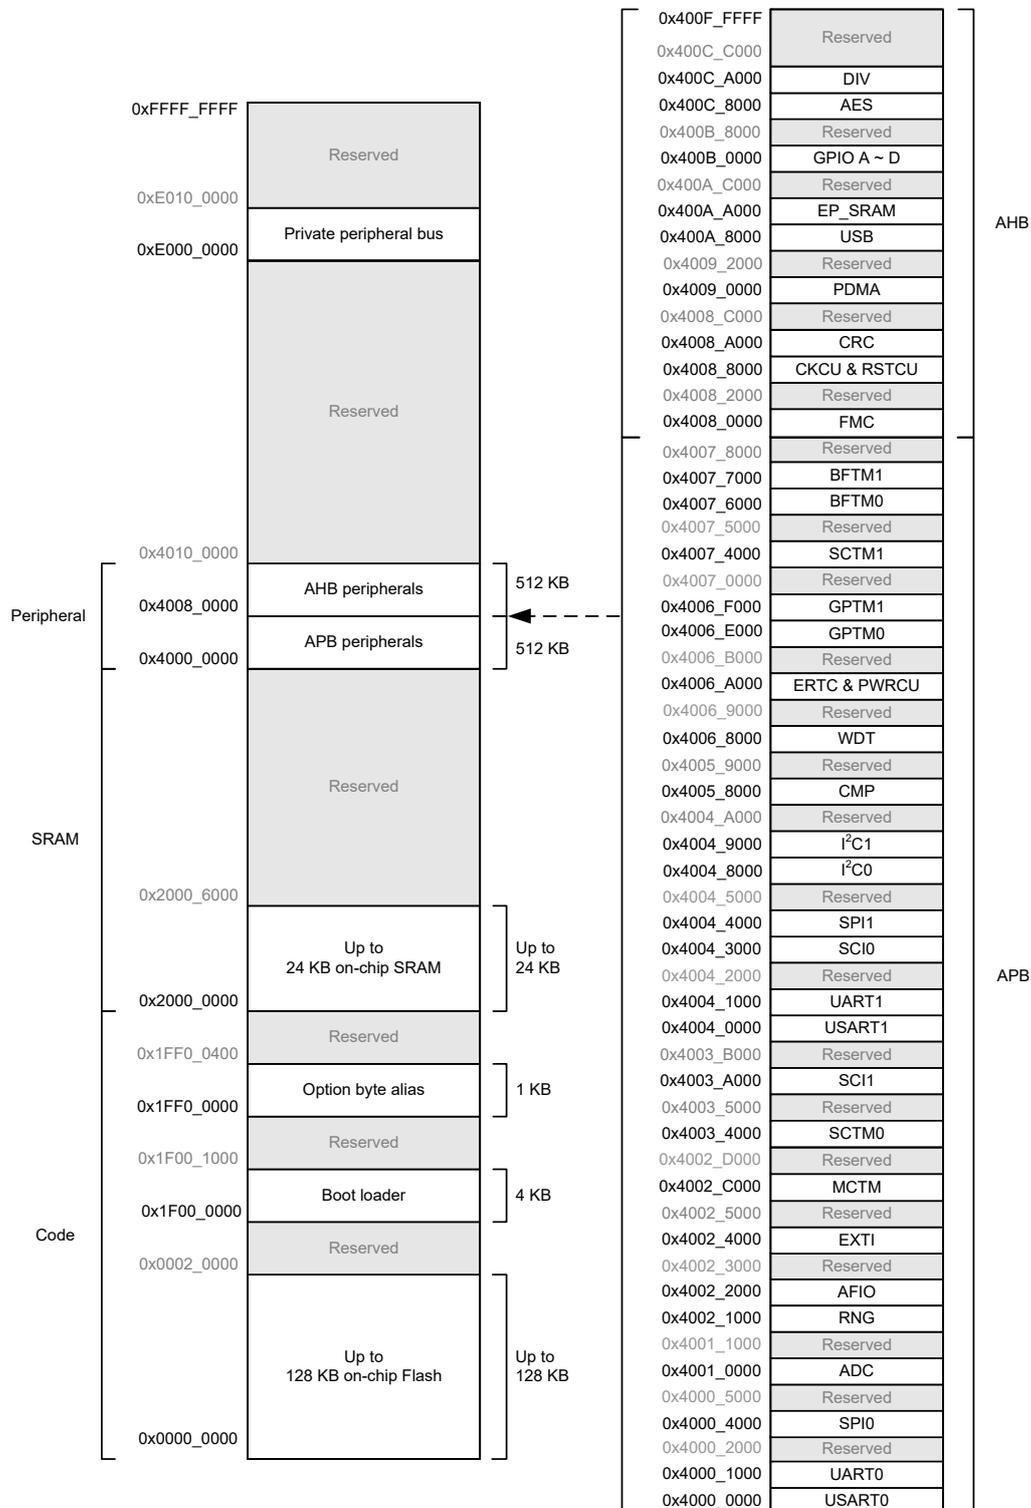


Figure 2. Memory Map

Table 2. Register Map

Start Address	End Address	Peripheral	Bus
0x4000_0000	0x4000_0FFF	USART0	APB
0x4000_1000	0x4000_1FFF	UART0	
0x4000_2000	0x4000_3FFF	Reserved	
0x4000_4000	0x4000_4FFF	SPI0	
0x4000_5000	0x4000_FFFF	Reserved	
0x4001_0000	0x4001_0FFF	ADC	
0x4001_1000	0x4002_0FFF	Reserved	
0x4002_1000	0x4002_1FFF	RNG	
0x4002_2000	0x4002_2FFF	AFIO	
0x4002_3000	0x4002_3FFF	Reserved	
0x4002_4000	0x4002_4FFF	EXTI	
0x4002_5000	0x4002_BFFF	Reserved	
0x4002_C000	0x4002_CFFF	MCTM	
0x4002_D000	0x4003_3FFF	Reserved	
0x4003_4000	0x4003_4FFF	SCTM0	
0x4003_5000	0x4003_9FFF	Reserved	
0x4003_A000	0x4003_AFFF	SCI1	
0x4003_B000	0x4003_FFFF	Reserved	
0x4004_0000	0x4004_0FFF	USART1	
0x4004_1000	0x4004_1FFF	UART1	
0x4004_2000	0x4004_2FFF	Reserved	
0x4004_3000	0x4004_3FFF	SCI0	
0x4004_4000	0x4004_4FFF	SPI1	
0x4004_5000	0x4004_7FFF	Reserved	
0x4004_8000	0x4004_8FFF	I ² C0	
0x4004_9000	0x4004_9FFF	I ² C1	
0x4004_A000	0x4005_7FFF	Reserved	
0x4005_8000	0x4005_8FFF	CMP	
0x4005_9000	0x4006_7FFF	Reserved	
0x4006_8000	0x4006_8FFF	WDT	
0x4006_9000	0x4006_9FFF	Reserved	
0x4006_A000	0x4006_AFFF	ERTC & PWRCU	
0x4006_B000	0x4006_DFFF	Reserved	
0x4006_E000	0x4006_EFFF	GPTM0	
0x4006_F000	0x4006_FFFF	GPTM1	
0x4007_0000	0x4007_3FFF	Reserved	
0x4007_4000	0x4007_4FFF	SCTM1	
0x4007_5000	0x4007_5FFF	Reserved	
0x4007_6000	0x4007_6FFF	BFTM0	
0x4007_7000	0x4007_7FFF	BFTM1	
0x4007_8000	0x4007_FFFF	Reserved	

Start Address	End Address	Peripheral	Bus
0x4008_0000	0x4008_1FFF	FMC	AHB
0x4008_2000	0x4008_7FFF	Reserved	
0x4008_8000	0x4008_9FFF	CKCU & RSTCU	
0x4008_A000	0x4008_BFFF	CRC	
0x4008_C000	0x4008_FFFF	Reserved	
0x4009_0000	0x4009_1FFF	PDMA	
0x4009_2000	0x400A_7FFF	Reserved	
0x400A_8000	0x400A_9FFF	USB	
0x400A_A000	0x400A_BFFF	EP_SRAM	
0x400A_C000	0x400A_FFFF	Reserved	
0x400B_0000	0x400B_1FFF	GPIO A	
0x400B_2000	0x400B_3FFF	GPIO B	
0x400B_4000	0x400B_5FFF	GPIO C	
0x400B_6000	0x400B_7FFF	GPIO D	
0x400B_8000	0x400C_7FFF	Reserved	
0x400C_8000	0x400C_9FFF	AES	
0x400C_A000	0x400C_BFFF	DIV	
0x400C_C000	0x400F_FFFF	Reserved	

Clock Structure

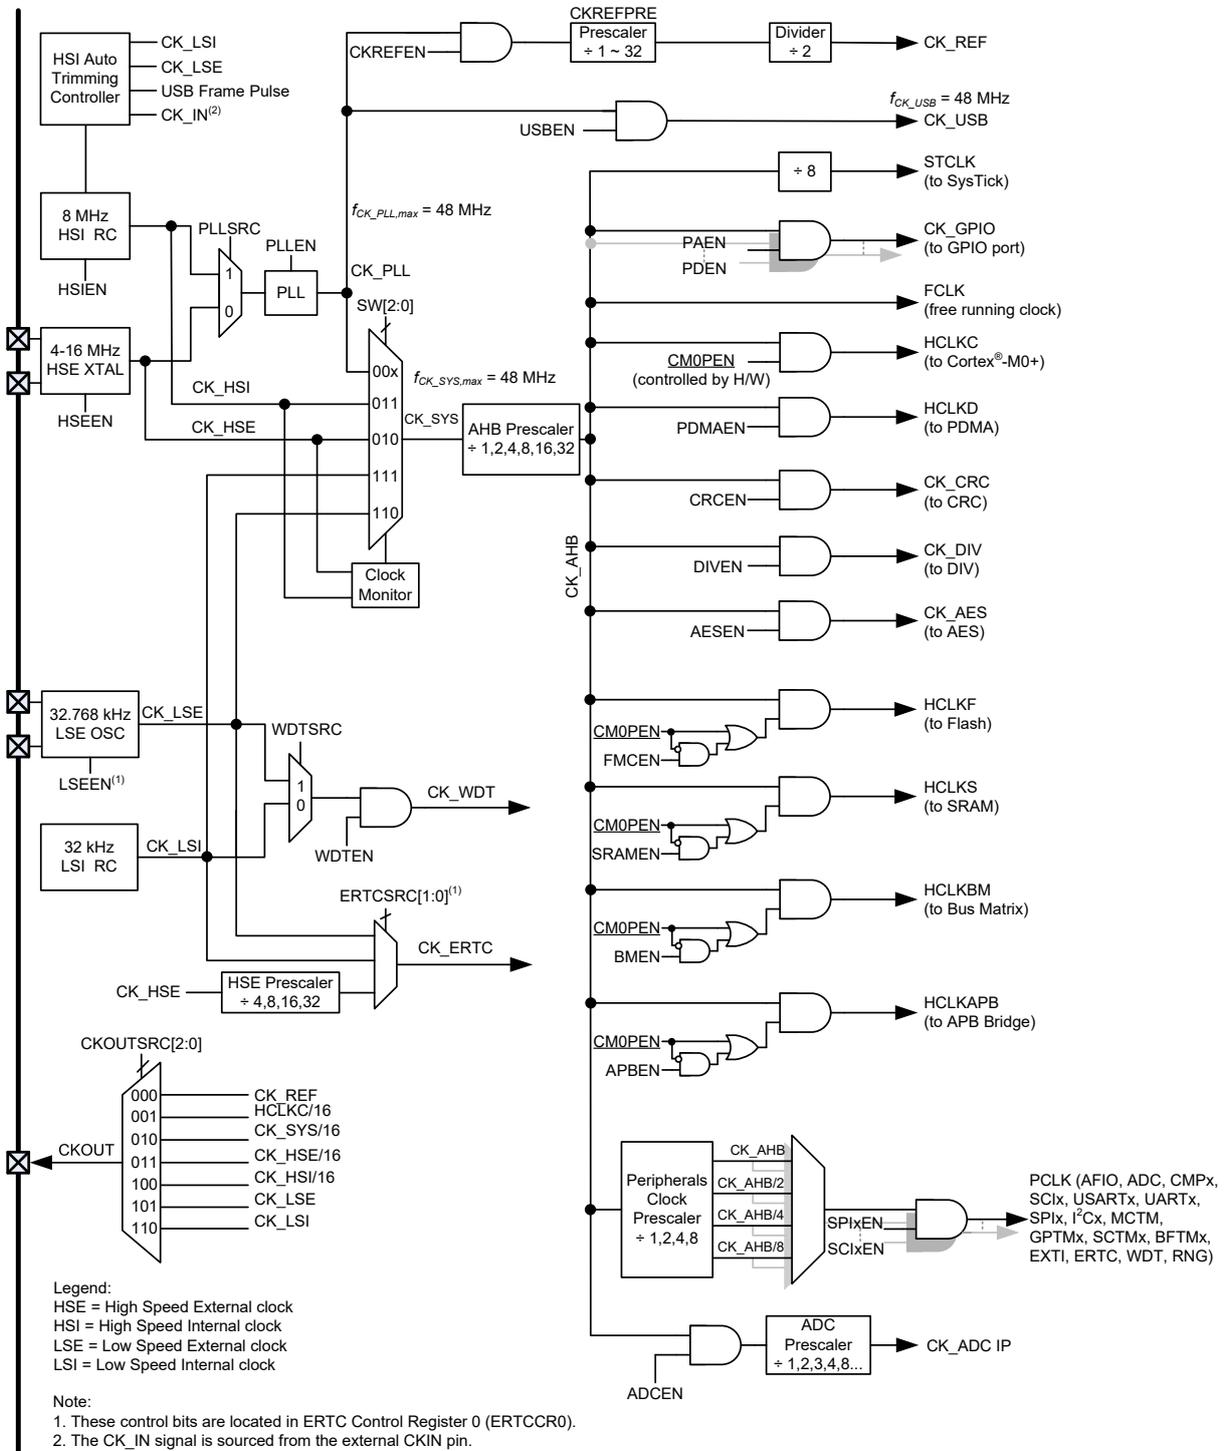


Figure 3. Clock Structure

4 Pin Assignment

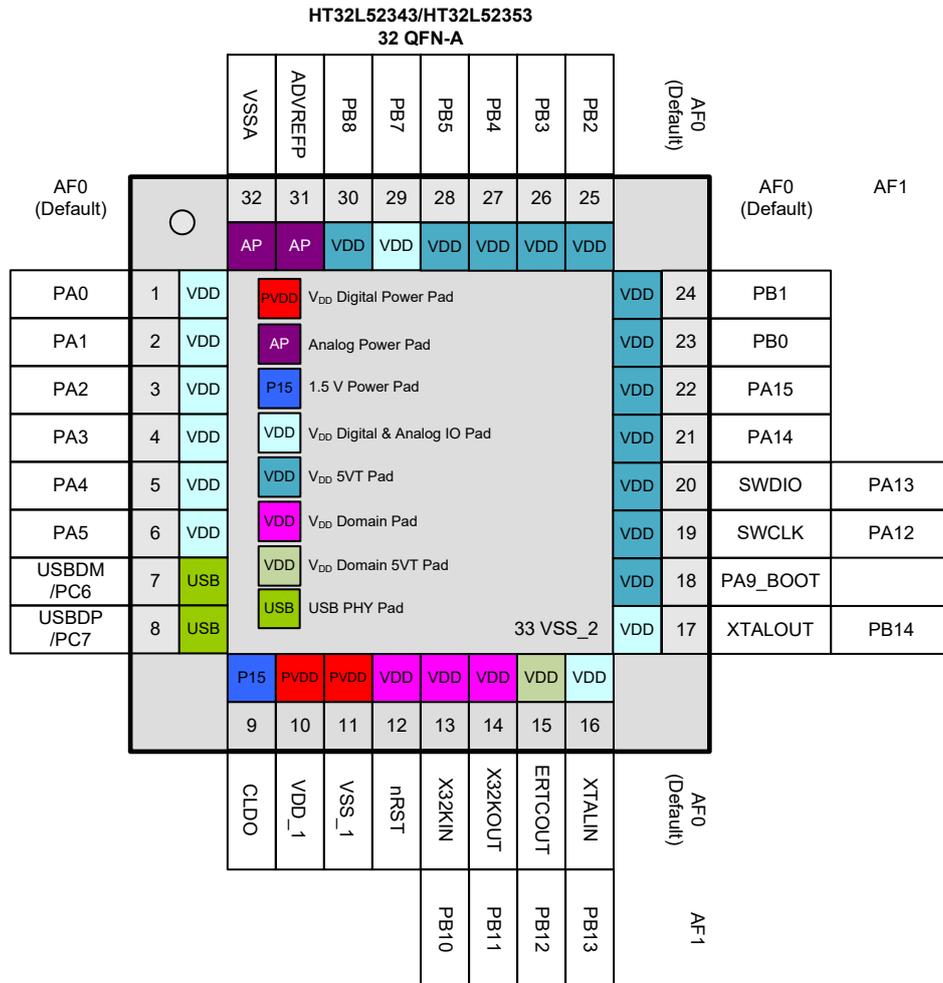


Figure 4. 32-pin QFN Pin Assignment

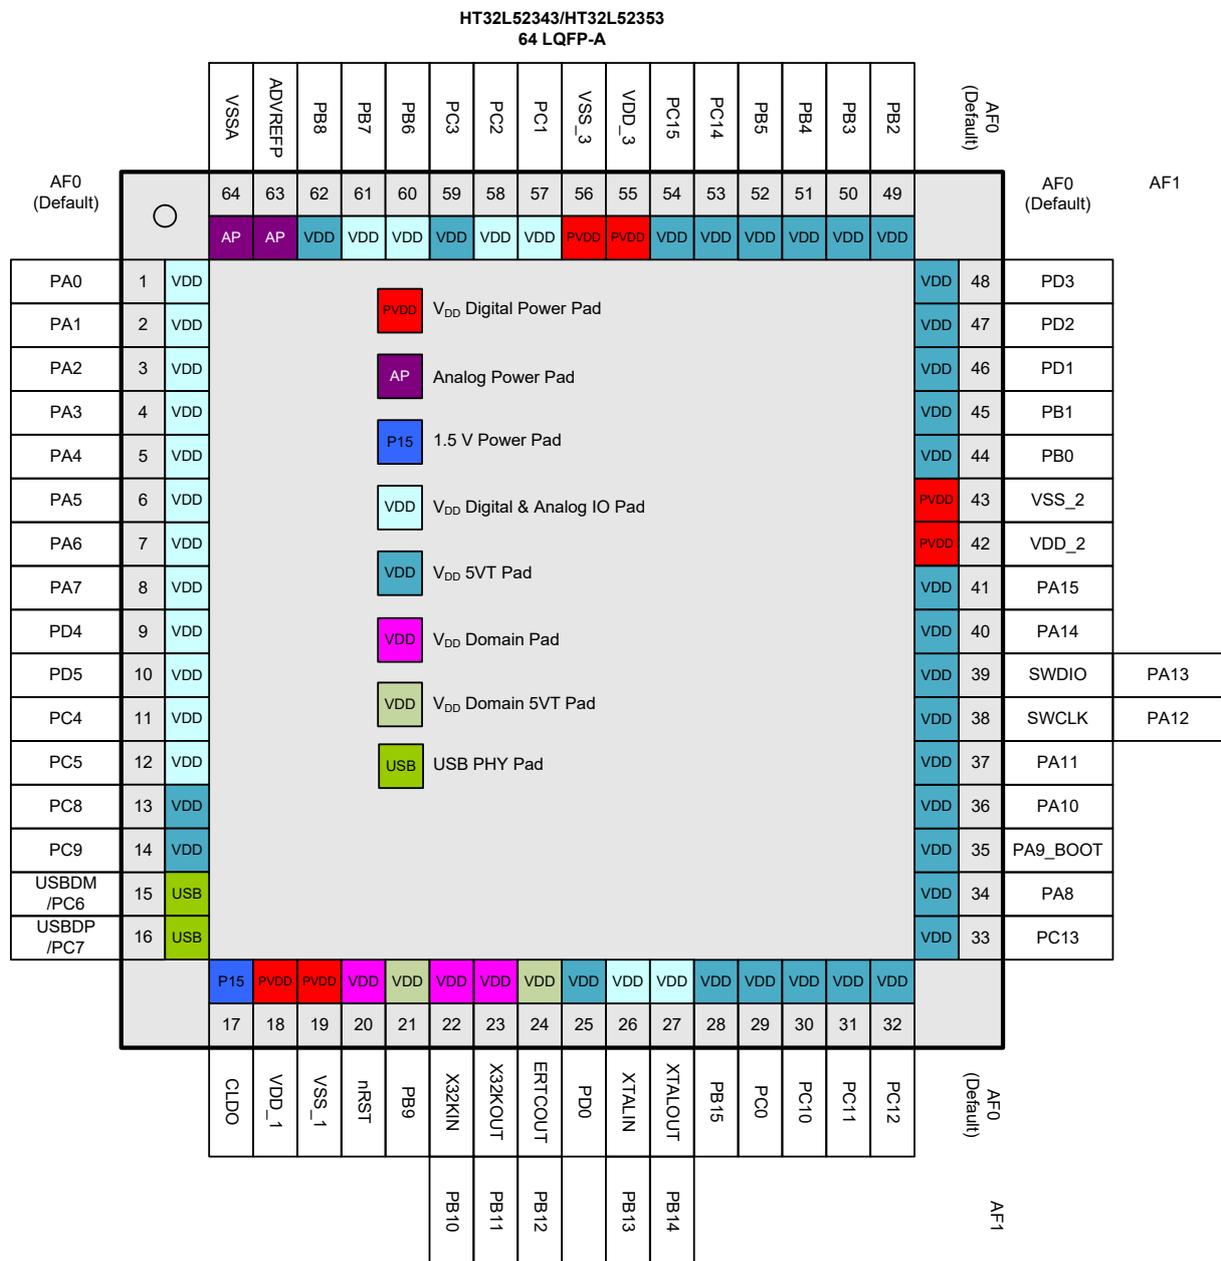


Figure 6. 64-pin LQFP Pin Assignment

Table 3. Pin Assignment

Package			Alternate Function Mapping															
64 LQFP	48 LQFP	32 QFN	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
			System Default	GPIO	ADC	CMP	MCTM/GPTM	SPI	USART/UART	I ² C	SCI	N/A	N/A	N/A	N/A	SCTM	N/A	System Other
1	1	1	PA0		ADC_IN0		GT1_CH0	SPI1_SCK	USR0_RTS	I2C1_SCL	SCI0_CLK							VBG
2	2	2	PA1		ADC_IN1		GT1_CH1	SPI1_MOSI	USR0_CTS	I2C1_SDA	SCI0_DIO							
3	3	3	PA2		ADC_IN2		GT1_CH2	SPI1_MISO	USR0_TX									
4	4	4	PA3		ADC_IN3		GT1_CH3	SPI1_SEL	USR0_RX									
5	5	5	PA4		ADC_IN4		GT0_CH0	SPI0_SCK	USR1_TX	I2C0_SCL	SCI1_CLK							
6	6	6	PA5		ADC_IN5		GT0_CH1	SPI0_MOSI	USR1_RX	I2C0_SDA	SCI1_DIO							
7	7		PA6		ADC_IN6		GT0_CH2	SPI0_MISO	USR1_RTS		SCI1_DET							
8	8		PA7		ADC_IN7		GT0_CH3	SPI0_SEL	USR1_CTS									
9			PD4		ADC_IN8				UR1_TX							SCTM0		
10			PD5		ADC_IN9				UR1_RX							SCTM1		
11	9		PC4		ADC_IN10		GT0_CH0	SPI1_SEL	UR0_TX	I2C1_SCL						SCTM0		
12	10		PC5		ADC_IN11		GT0_CH1	SPI1_SCK	UR0_RX	I2C1_SDA						SCTM1		
13			PC8				GT0_CH2	SPI1_MOSI										
14			PC9				GT0_CH3	SPI1_MISO										
15	11	7	PC6				MT_CH2		USR0_TX	I2C0_SCL						SCTM0		
15	11	7	USBDM															
16	12	8	USBDP															
16	12	8	PC7				MT_CH2N		USR0_RX	I2C0_SDA						SCTM1		
17	13	9	CLDO															
18	14	10	VDD_1															
19	15	11	VSS_1															
20	16	12	nRST															
21	17		PB9															WAKEUP1
22	18	13	X32KIN	PB10			MT_CH0		UR1_TX									
23	19	14	X32KOUT	PB11			MT_CH0N		UR1_RX									
24	20	15	ERTCOUT	PB12														WAKEUP0
25			PD0							I2C0_SCL						SCTM0		
26	21	16	XTALIN	PB13			MT_CH1		UR0_TX	I2C0_SDA								
27	22	17	XTALOUT	PB14			MT_CH1N		UR0_RX									
28	23		PB15				MT_CH0	SPI0_SEL	USR1_TX	I2C1_SCL								
29	24		PC0				MT_CH0N	SPI0_SCK	USR1_RX	I2C1_SDA								
30			PC10				GT1_CH0	SPI1_SEL										
31			PC11				GT1_CH1	SPI1_SCK										

Package			Alternate Function Mapping															
			AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
64 LQFP	48 LQFP	32 QFN	System Default	GPIO	ADC	CMP	MCTM /GPTM	SPI	USART /UART	I ² C	SCI	N/A	N/A	N/A	N/A	SCTM	N/A	System Other
32			PC12				GT1_CH2	SPI1_MOSI	UR1_TX	I2C0_SCL								
33			PC13				GT1_CH3	SPI1_MISO	UR1_RX	I2C0_SDA								
34	25		PA8						USR0_TX		SCI1_CLK							
35	26	18	PA9_BOOT					SPI0_MOSI			SCI1_DIO							CKOUT
36	27		PA10				MT_CH1		USR0_RX		SCI0_DET							
37	28		PA11				MT_CH1N	SPI0_MISO			SCI1_DET					SCTM0		
38	29	19	SWCLK	PA12														
39	30	20	SWDIO	PA13														
40	31	21	PA14				MT_CH0	SPI1_SEL	USR1_TX	I2C1_SCL	SCI0_CLK							
41	32	22	PA15				MT_CH0N	SPI1_SCK	USR1_RX	I2C1_SDA	SCI0_DIO					SCTM1		
42	35		VDD_2															
43	36	EP	VSS_2															
44	33	23	PB0				MT_CH1	SPI1_MOSI	USR0_TX	I2C0_SCL								
45	34	24	PB1				MT_CH1N	SPI1_MISO	USR0_RX	I2C0_SDA						SCTM0		
46			PD1				MT_CH2		USR1_RTS		SCI0_CLK							
47			PD2				MT_CH2N		USR1_CTS		SCI0_DIO							
48			PD3				MT_CH3				SCI0_DET							
49	37	25	PB2			COUT0	MT_CH2	SPI0_SEL	UR0_TX									CKIN
50	38	26	PB3			COUT1	MT_CH2N	SPI0_SCK	UR0_RX							SCTM1		
51	39	27	PB4				MT_BRK	SPI0_MOSI	UR1_TX							SCTM0		
52	40	28	PB5				MT_BRK	SPI0_MISO	UR1_RX							SCTM1		
53			PC14			COUT0	MT_CH3			I2C0_SCL								
54			PC15			COUT1				I2C0_SDA						SCTM1		
55			VDD_3															
56			VSS_3															
57	41		PC1			CN0	MT_CH0	SPI1_SEL	UR1_TX									
58	42		PC2			CP0	MT_CH0N	SPI1_SCK										
59	43		PC3			COUT0		SPI1_MOSI	UR1_RX									
60	44		PB6			CN1	MT_CH2	SPI1_MISO	UR0_TX		SCI1_CLK							
61	45	29	PB7			CP1	MT_CH2N			I2C1_SCL	SCI1_DET							
62	46	30	PB8			COUT1	MT_CH3		UR0_RX	I2C1_SDA	SCI1_DIO							
63	47	31	ADVREFP															
64	48	32	VSSA															

Note: The EP is meant the exposed pad of the QFN package.

Table 4. Pin Description

Pin Number			Pin Name	Type ⁽¹⁾	I/O Structure ⁽²⁾	Output Driving	Description
64 LQFP	48 LQFP	32 QFN					Default Function (AF0)
1	1	1	PA0	AI/O	33V	4/8/12/16 mA	PA0
2	2	2	PA1	AI/O	33V	4/8/12/16 mA	PA1
3	3	3	PA2	AI/O	33V	4/8/12/16 mA	PA2
4	4	4	PA3	AI/O	33V	4/8/12/16 mA	PA3
5	5	5	PA4	AI/O	33V	4/8/12/16 mA	PA4, this pin provides a USART_TX function in the Boot loader mode
6	6	6	PA5	AI/O	33V	4/8/12/16 mA	PA5, this pin provides a USART_RX function in the Boot loader mode
7	7		PA6	AI/O	33V	4/8/12/16 mA	PA6
8	8		PA7	AI/O	33V	4/8/12/16 mA	PA7
9			PD4	AI/O	33V	4/8/12/16 mA	PD4
10			PD5	AI/O	33V	4/8/12/16 mA	PD5
11	9		PC4	AI/O	33V	4/8/12/16 mA	PC4
12	10		PC5	AI/O	33V	4/8/12/16 mA	PC5
13			PC8	I/O	5VT	4/8/12/16 mA	PC8
14			PC9	I/O	5VT	4/8/12/16 mA	PC9
15	11	7	PC6	I/O	5VT	4/8/12/16 mA	PC6
15	11	7	USBDM	AI/O	—	—	USB Differential data bus conforming to the Universal Serial Bus standard
16	12	8	USBDP	AI/O	—	—	USB Differential data bus conforming to the Universal Serial Bus standard
16	12	8	PC7	I/O	5VT	4/8/12/16 mA	PC7
17	13	9	CLDO	P	—	—	Core power LDO V _{CORE} output It must be connect a 2.2 μF capacitor as close as possible between this pin and VSS_1.
18	14	10	VDD_1	P	—	—	Voltage for digital I/O
19	15	11	VSS_1	P	—	—	Ground reference for digital I/O
20	16	12	nRST ⁽³⁾	I (V _{DD})	33V_PU	—	External reset pin and external wakeup pin in the Power-Down mode
21	17		PB9 ⁽³⁾	I/O (V _{DD})	5VT	4/8/12/16 mA	PB9
22	18	13	PB10 ⁽³⁾	AI/O (V _{DD})	33V	4/8/12/16 mA	X32KIN
23	19	14	PB11 ⁽³⁾	AI/O (V _{DD})	33V	4/8/12/16 mA	X32KOUT
24	20	15	PB12 ⁽³⁾	I/O (V _{DD})	5VT	4/8/12/16 mA	ERTCOUT
25			PD0	I/O	5VT	4/8/12/16 mA	PD0
26	21	16	PB13	AI/O	33V	4/8/12/16 mA	XTALIN
27	22	17	PB14	AI/O	33V	4/8/12/16 mA	XTALOUT
28	23		PB15	I/O	5VT	4/8/12/16 mA	PB15
29	24		PC0	I/O	5VT	4/8/12/16 mA	PC0
30			PC10	I/O	5VT	4/8/12/16 mA	PC10

Pin Number			Pin Name	Type ⁽¹⁾	I/O Structure ⁽²⁾	Output Driving	Description
64 LQFP	48 LQFP	32 QFN					Default Function (AF0)
31			PC11	I/O	5VT	4/8/12/16 mA	PC11
32			PC12	I/O	5VT	4/8/12/16 mA	PC12
33			PC13	I/O	5VT	4/8/12/16 mA	PC13
34	25		PA8	I/O	5VT	4/8/12/16 mA	PA8
35	26	18	PA9	I/O	5VT_PU	4/8/12/16 mA	PA9_BOOT
36	27		PA10	I/O	5VT	4/8/12/16 mA	PA10
37	28		PA11	I/O	5VT	4/8/12/16 mA	PA11
38	29	19	PA12	I/O	5VT_PU	4/8/12/16 mA	SWCLK
39	30	20	PA13	I/O	5VT_PU	4/8/12/16 mA	SWDIO
40	31	21	PA14	I/O	5VT	4/8/12/16 mA	PA14
41	32	22	PA15	I/O	5VT	4/8/12/16 mA	PA15
42	35		VDD_2	P	—	—	Voltage for digital I/O
43	36	EP	VSS_2	P	—	—	Ground reference for digital I/O
44	33	23	PB0	I/O	5VT	4/8/12/16 mA	PB0
45	34	24	PB1	I/O	5VT	4/8/12/16 mA	PB1
46			PD1	I/O	5VT	4/8/12/16 mA	PD1
47			PD2	I/O	5VT	4/8/12/16 mA	PD2
48			PD3	I/O	5VT	4/8/12/16 mA	PD3
49	37	25	PB2	AI/O	5VT	4/8/12/16 mA	PB2
50	38	26	PB3	AI/O	5VT	4/8/12/16 mA	PB3
51	39	27	PB4	I/O	5VT	4/8/12/16 mA	PB4
52	40	28	PB5	I/O	5VT	4/8/12/16 mA	PB5
53			PC14	AI/O	5VT	4/8/12/16 mA	PC14
54			PC15	AI/O	5VT	4/8/12/16 mA	PC15
55			VDD_3	P	—	—	Voltage for digital I/O
56			VSS_3	P	—	—	Ground reference for digital I/O
57	41		PC1	AI/O	33V	4/8/12/16 mA	PC1
58	42		PC2	AI/O	33V	4/8/12/16 mA	PC2
59	43		PC3	AI/O	5VT	4/8/12/16 mA	PC3
60	44		PB6	AI/O	33V	4/8/12/16 mA	PB6
61	45	29	PB7	AI/O	33V	4/8/12/16 mA	PB7
62	46	30	PB8	AI/O	5VT	4/8/12/16 mA	PB8
63	47	31	ADVREFP	P	—	—	Analog voltage for ADC and comparators
64	48	32	VSSA	P	—	—	Ground reference for the ADC and comparators

- Note: 1. I = Input, O = Output, A = Analog Port, P = Power Supply, V_{DD} = V_{DD} Power, EP = Exposed Pad.
 2. 33V = 3.3 V tolerant, 5VT = 5 V-tolerant, PU = Pull-up.
 3. These pins are located at the V_{DD} power domain.
 4. In the Boot loader mode, the USART and USB interfaces are available for communication.

5 Electrical Characteristics

Power Supply Scheme

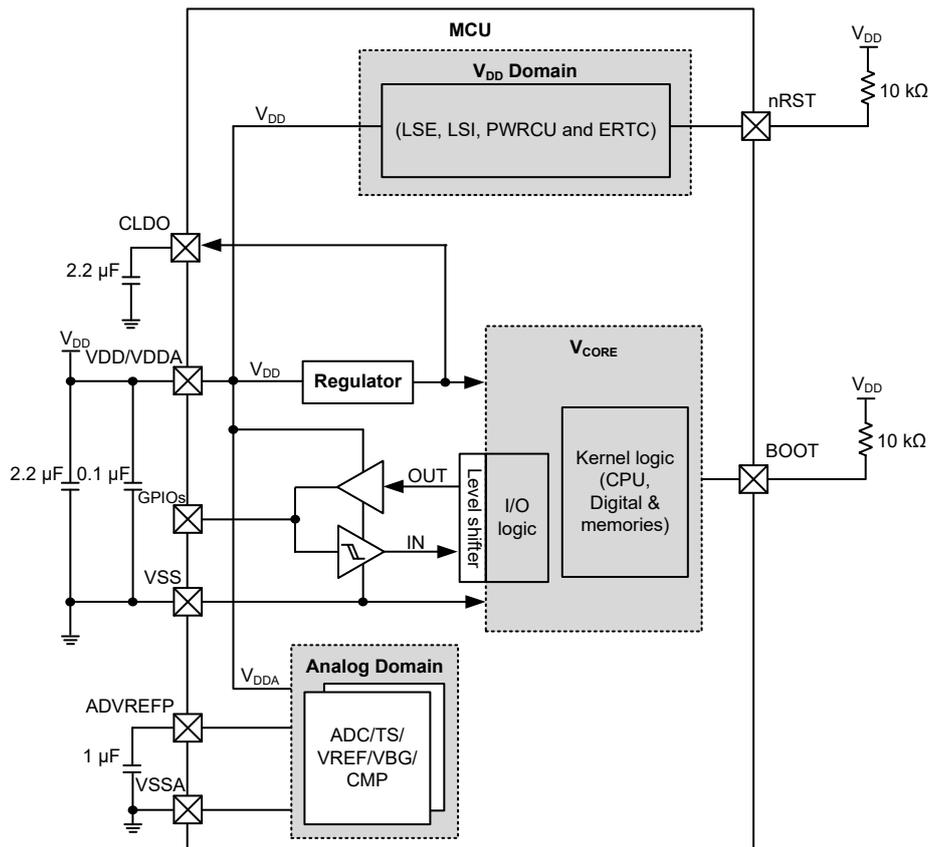


Figure 7. Power Supply Scheme

- Note:
1. All regulator capacitors must be placed as close to the MCU as possible.
 2. It is recommended that the pull-up resistor of the BOOT pin is 10 kΩ.
 3. It is recommended that the pull-up resistor of the nRST pin is 10 kΩ.

Absolute Maximum Ratings

The following table shows the absolute maximum ratings of the device. These are stress ratings only. Stresses beyond absolute maximum ratings may cause permanent damage to the device. Note that the device is not guaranteed to operate properly at the maximum ratings. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

Table 5. Absolute Maximum Ratings

Symbol	Parameter	Min.	Max.	Unit
V _{DD}	External Main Supply Voltage	V _{SS} - 0.3	V _{SS} + 3.6	V
V _{DDA}	External Analog Supply Voltage	V _{SSA} - 0.3	V _{SSA} + 3.6	V
V _{IN}	Input Voltage on 5 V-tolerant I/O	V _{SS} - 0.3	V _{SS} + 5.5	V
	Input Voltage on Other I/O	V _{SS} - 0.3	V _{DD} + 0.3	V
T _A	Ambient Operating Temperature Range	-40	105	°C
T _{STG}	Storage Temperature Range	-60	150	°C
T _J	Maximum Junction Temperature	—	125	°C
P _D	Total Power Dissipation	—	500	mW
V _{ESD}	Electrostatic Discharge Voltage - Human Body Mode	-4000	+4000	V

Recommended DC Operating Conditions

Table 6. Recommended DC Operating Conditions

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DD}	Operating Voltage	—	1.65	3.3	3.6	V
V _{DDA}	Analog Operating Voltage	—	2.0	3.3	3.6	V

On-Chip LDO Voltage Regulator Characteristics

Table 7. LDO Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{LDO}	Internal Regulator Output Voltage	V _{DD} ≥ 2.0 V Regulator input @ I _{LDO} = 35 mA and voltage variant = ±5 %, after trimming	1.425	1.5	1.57	V
I _{LDO}	Output Current	V _{DD} = 2.0 V Regulator input	—	30	35	mA
C _{LDO}	External Filter Capacitor Value for Internal Core Power Supply	The capacitor value is dependent on the core power current consumption	1	2.2	—	μF

On-Chip Ultra-low Power LDO Voltage Regulator Characteristics

Table 8. ULDO Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{ULDO}	Internal Regulator Output Voltage	V _{DD} ≥ 1.65 V Regulator input @ I _{ULDO} = 2 mA and voltage variant = ±5 %, after trimming	1.425	1.5	1.57	V
I _{ULDO}	Output Current	V _{DD} = 1.65 V ~ 3.6 V Regulator input @ V _{ULDO} = 1.5 V	—	2	5	mA
C _{ULDO}	External Filter Capacitor Value for Internal Core Power Supply	The capacitor value is dependent on the core power current consumption	1	2.2	—	μF

Power Consumption

The current consumption is influenced by several parameters and factors, including the operating voltage, ambient temperature, I/O pin loading, device software configuration, operating frequencies, I/O pin switching rate, program location in memory and executed binary code.

The MCU is configured under the following conditions for current consumption measured:

- All I/O pins are set to a high-impedance (floating) state.
- All peripherals are disabled unless specifically stated otherwise.
- The Flash memory access time is optimized using the minimum wait states number, depending on the f_{HCLK} frequency.
- When the peripherals are enabled, $f_{PCLK} = f_{HCLK}$.

Table 9. Power Consumption Characteristics

$T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.

Symbol	Parameter	f_{HCLK}	Conditions		Typ.	Max. @ T_A		Unit	
						25 °C	105 °C		
I_{DD}	Supply Current (Run Mode)	48 MHz	$V_{DD} = 3.3\text{ V}$, HSI = 8 MHz, PLL = 48 MHz	All peripherals enabled	12.2	14.8	TBD	mA	
				All peripherals disabled	4.43	5.23	TBD		
		24 MHz	$V_{DD} = 3.3\text{ V}$, HSI = 8 MHz, PLL = 48 MHz	All peripherals enabled	6.98	8.28	TBD		
				All peripherals disabled	2.74	3.19	TBD		
		12 MHz	$V_{DD} = 3.3\text{ V}$, HSI = 8 MHz, PLL = 48 MHz	All peripherals enabled	4.00	4.71	TBD		
				All peripherals disabled	1.60	1.84	TBD		
		8 MHz	$V_{DD} = 3.3\text{ V}$, HSI = 8 MHz, PLL = off	All peripherals enabled	2.14	2.53	TBD		
				All peripherals disabled	0.92	1.08	TBD		
		32 kHz	$V_{DD} = 3.3\text{ V}$, LSI = 32 kHz, MLDO off & ULDO on	All peripherals enabled	9.36	12.4	TBD		μA
				All peripherals disabled	4.20	6.44	TBD		
	Supply Current (Sleep Mode)	48 MHz	$V_{DD} = 3.3\text{ V}$, HSI = 8 MHz, PLL = 48 MHz	All peripherals enabled	9.67	11.6	TBD	mA	
				All peripherals disabled	0.99	1.13	TBD		
		24 MHz	$V_{DD} = 3.3\text{ V}$, HSI = 8 MHz, PLL = 48 MHz	All peripherals enabled	5.53	6.55	TBD		
				All peripherals disabled	0.81	0.93	TBD		
12 MHz		$V_{DD} = 3.3\text{ V}$, HSI = 8 MHz, PLL = 48 MHz	All peripherals enabled	3.28	3.85	TBD			
			All peripherals disabled	0.72	0.82	TBD			
8 MHz		$V_{DD} = 3.3\text{ V}$, HSI = 8 MHz, PLL = off	All peripherals enabled	1.65	1.94	TBD			
			All peripherals disabled	0.33	0.40	TBD			
32 kHz		$V_{DD} = 3.3\text{ V}$, LSI = 32 kHz, MLDO off & ULDO on	All peripherals enabled	7.41	9.93	TBD	μA		
			All peripherals disabled	1.85	3.72	TBD			

Symbol	Parameter	f _{HCLK}	Conditions	Typ.	Max. @ T _A		Unit	
					25 °C	105 °C		
I _{DD}	Supply Current (Deep-Sleep 1 Mode)	—	V _{DD} = 3.3 V, HSI/HSE/PLL clock off, LDO off, ULDO on, LSE off, LSI on, ERTC on	1.71	3.59	TBD	μA	
	Supply Current (Deep-Sleep 2 Mode)	—	V _{DD} = 3.3 V, HSI/HSE/PLL clock off, LDO off, ULDO on, LSE off, LSI on, ERTC off	1.33	3.22	TBD	μA	
	Supply Current (Deep-Sleep 3 Mode)	—	V _{DD} = 3.3 V, HSI/HSE/PLL clock off, LDO off, ULDO on, LSE off, LSI off, ERTC off	0.71	2.54	TBD	μA	
	Supply Current (Power-Down Mode)	—	—	V _{DD} = 3.3 V, LDO and ULDO off, LSE off, LSI on, ERTC on	1.25	1.63	TBD	μA
				V _{DD} = 3.3 V, LDO and ULDO off, LSE off, LSI on, ERTC off	0.88	1.13	TBD	
Supply Current (Deep Power-Down Mode)	—	—	V _{DD} = 3.3 V, LDO and ULDO off, LSE off, LSI off, ERTC off	0.125	0.223	TBD	μA	

- Note: 1. HSE means high speed external oscillator. HSI means 8 MHz high speed internal oscillator.
 2. LSE means 32.768 kHz low speed external oscillator. LSI means 32 kHz low speed internal oscillator.
 3. ERTC means enhanced real-time clock.
 4. Code = while (1) {208 NOP} executed in Flash.

Reset and Supply Monitor Characteristics

Table 10. V_{DD} Power Reset Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DD}	Operation Voltage	T _A = -40 °C ~ 105 °C	0.6	—	3.6	V
V _{POR}	Power On Reset Threshold (Rising Voltage on V _{DD})	T _A = -40 °C ~ 105 °C	1.40	1.55	1.65	V
V _{PDR}	Power Down Reset Threshold (Falling Voltage on V _{DD})	T _A = -40 °C ~ 105 °C	1.27	1.45	1.57	V
V _{PORHYST}	POR Hysteresis	—	—	100	—	mV
t _{POR}	Reset Delay Time	V _{DD} = 3.3 V	—	0.1	0.2	ms

- Note: 1. Data based on characterization results only, not tested in production.
 2. If the LDO is turned on, the V_{DD} POR has to be in the de-assertion condition. When the V_{DD} POR is in the assertion state then the LDO and ULDO will be turned off.

Table 11. LVD/BOD Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	
V _{BOD}	Voltage of Brown Out Detection	After factory-trimmed	V _{DD} Falling edge	1.62	1.68	1.74	V
			V _{DD} Rising edge	1.68	1.74	1.8	
V _{BODHYST}	BOD Hysteresis	V _{DD} = 2.0 V	—	60	—	mV	
V _{LVD}	Voltage of Low Voltage Detection	V _{DD} Falling edge	LVDS = 000	1.67	1.75	1.83	V
			LVDS = 001	1.87	1.95	2.03	V
			LVDS = 010	2.07	2.15	2.23	V
			LVDS = 011	2.27	2.35	2.43	V
			LVDS = 100	2.47	2.55	2.63	V
			LVDS = 101	2.67	2.75	2.83	V
			LVDS = 110	2.87	2.95	3.03	V
LVDS = 111	3.07	3.15	3.23	V			

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{LVDHYST}	LVD Hysteresis	V _{DD} = 3.3 V	—	100	—	mV
t _{suLVD}	LVD Setup Time	V _{DD} = 3.3 V	—	—	5	μs
t _{aiLVD}	LVD Active Delay Time	V _{DD} = 3.3 V	—	200	—	μs
I _{DDLVD}	Operation Current ⁽²⁾	V _{DD} = 3.3 V	—	5	15	μA

Note: 1. Data based on characterization results only, not tested in production.

2. Bandgap current is not included.

3. LVDS field is in the PWRCU LVDCSR register.

External Clock Characteristics

Table 12. High Speed External Clock (HSE) Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DD}	Operation Voltage	—	1.65	—	3.6	V
f _{HSE}	HSE Frequency	—	4	—	16	MHz
C _L	Load Capacitance	V _{DD} = 3.3 V, R _{ESR} = 100 Ω @ 16 MHz	—	—	22	pF
R _{FHSE}	Internal Feedback Resistor between XTALIN and XTALOUT Pins	—	—	1	—	MΩ
R _{ESR}	Equivalent Series Resistance	V _{DD} = 3.3 V, C _L = 12 pF @ 16 MHz, HSEGAIN = 0 V _{DD} = 2.4 V, C _L = 12 pF @ 16 MHz, HSEGAIN = 1	—	—	160	Ω
D _{HSE}	HSE Oscillator Duty Cycle	—	40	—	60	%
I _{DDHSE}	HSE Oscillator Current Consumption	V _{DD} = 3.3 V @ 16 MHz	—	TBD	—	mA
I _{PWDHSE}	HSE Oscillator Power Down Current	V _{DD} = 3.3 V	—	—	0.01	μA
t _{SUHSE}	HSE Oscillator Startup Time	V _{DD} = 3.3 V	—	—	4	ms

Table 13. Low Speed External Clock (LSE) Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DD}	Operation Voltage	—	1.65	—	3.6	V
f _{CK_LSE}	LSE Frequency	V _{DD} = 1.65 V ~ 3.6 V	—	32.768	—	kHz
R _F	Internal Feedback Resistor	—	—	10	—	MΩ
R _{ESR}	Equivalent Series Resistance	V _{DD} = 3.3 V	30	—	TBD	kΩ
C _L	Recommended Load Capacitances	V _{DD} = 3.3 V	6	—	TBD	pF
I _{DDLSE}	Oscillator Supply Current (High Current Mode)	f _{CK_LSE} = 32.768 kHz, R _{ESR} = 50 kΩ, C _L ≥ 7 pF, V _{DD} = 1.65 V ~ 3.6 V, T _A = -40 °C ~ 105 °C	—	3.3	6.3	μA
	Oscillator Supply Current (Low Current Mode)	f _{CK_LSE} = 32.768 kHz, R _{ESR} = 50 kΩ, C _L < 7 pF, V _{DD} = 1.65 V ~ 3.6 V, T _A = -40 °C ~ 105 °C	—	1.8	3.3	μA
	LSE Oscillator Power Down Current	—	—	—	0.01	μA

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
t _{SULSE}	LSE Oscillator Startup Time (Low Current Mode)	f _{CK_LSE} = 32.768 kHz, V _{DD} = 1.65 V ~ 3.6 V	500	—	—	ms

Note: The following guidelines are recommended to increase the stability of the crystal circuit of the HSE / LSE clock in the PCB layout.

1. The crystal oscillator should be located as close as possible to the MCU to keep the trace lengths as short as possible to reduce any parasitic capacitance.
2. Shield lines in the vicinity of the crystal by using a ground plane to isolate signals and reduce noise.
3. Keep any high frequency signal lines away from the crystal area to prevent any crosstalk adverse effects.

Internal Clock Characteristics

Table 14. High Speed Internal Clock (HSI) Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DD}	Operation Voltage	—	1.65	—	3.6	V
f _{HSI}	HSI Frequency	V _{DD} = 3.3 V @ 25 °C	—	8	—	MHz
ACC _{HSI}	Factory Calibrated HSI Oscillator Frequency Accuracy	V _{DD} = 3.3 V, T _A = 25 °C	-1	—	1	%
		V _{DD} = 1.65 V ~ 3.6 V, T _A = -20 °C ~ 60 °C	-1.5	—	2	%
		V _{DD} = 1.65 V ~ 3.6 V, T _A = -40 °C ~ 105 °C	-2.5	—	2.5	%
Duty	Duty Cycle	f _{HSI} = 8 MHz	35	—	65	%
I _{DDHSI}	HSI Oscillator Supply Current	f _{HSI} = 8 MHz	—	300	500	μA
	HSI Oscillator Power Down Current		—	—	0.05	μA
t _{SUHSI}	HSI Oscillator Startup Time	f _{HSI} = 8 MHz	—	—	10	μs

Table 15. Low Speed Internal Clock (LSI) Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DD}	Operation Voltage	T _A = -40 °C ~ 105 °C	1.65	—	3.6	V
f _{LSI}	LSI Frequency	V _{DD} = 3.3 V, T _A = -40 °C ~ 105 °C	21	32	43	kHz
ACC _{LSI}	LSI Oscillator Frequency Accuracy	After factory-trimmed, V _{DD} = 3.3 V	-10	—	+10	%
I _{DDL}	LSI Oscillator Operating Current	V _{DD} = 3.3 V	—	0.4	0.8	μA
t _{SULSI}	LSI Oscillator Startup Time	V _{DD} = 3.3 V	—	—	100	μs

PLL Characteristics

Table 16. PLL Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
f _{PLLIN}	PLL Input Clock	—	4	—	16	MHz
f _{CK_PLL}	PLL Output Clock	—	16	—	48	MHz
t _{LOCK}	PLL Lock Time	—	—	200	—	μs

Memory Characteristics

Table 17. Flash Memory Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
N _{ENDU}	Number of Guaranteed Program / Erase Cycles before Failure (Endurance)	T _A = -40 °C ~ 105 °C	20	—	—	K cycles
t _{RET}	Data Retention Time	T _A = -40 °C ~ 105 °C	10	—	—	Years
t _{PROG}	Word Programming Time	T _A = -40 °C ~ 105 °C	20	—	—	μs
t _{ERASE}	Page Erase Time	T _A = -40 °C ~ 105 °C	2	—	—	ms
t _{MERASE}	Mass Erase Time	T _A = -40 °C ~ 105 °C	10	—	—	ms

I/O Port Characteristics

Table 18. I/O Port Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	
I _{IL}	Low Level Input Current	3.3 V I/O	V _I = V _{SS} , On-chip pull-up resistor disabled	—	—	3	μA
		5 V-tolerant I/O		—	—	3	μA
		Reset pin		—	—	3	μA
I _{IH}	High Level Input Current	3.3 V I/O	V _I = V _{DD} , On-chip pull-down resistor disabled	—	—	3	μA
		5 V-tolerant I/O		—	—	3	μA
		Reset pin		—	—	3	μA
V _{IL}	Low Level Input Voltage	3.3 V I/O	-0.3	—	V _{DD} × 0.35	V	
		5 V-tolerant I/O	-0.3	—	V _{DD} × 0.35	V	
		Reset pin	-0.3	—	V _{DD} × 0.35	V	
V _{IH}	High Level Input Voltage	3.3 V I/O	V _{DD} × 0.65	—	V _{DD} + 0.3	V	
		5 V-tolerant I/O	V _{DD} × 0.65	—	5.5	V	
		Reset pin	V _{DD} × 0.65	—	V _{DD} + 0.3	V	
V _{HYS}	Schmitt Trigger Input Voltage Hysteresis	3.3 V I/O	—	0.12 × V _{DD}	—	mV	
		5 V-tolerant I/O	—	0.12 × V _{DD}	—	mV	
		Reset pin	—	0.12 × V _{DD}	—	mV	
I _{OL}	Low Level Output Current (GPIO Sink Current)	3.3 V I/O	4 mA drive, V _{OL} = 0.4 V	4	—	—	mA
		5 V-tolerant I/O					
		3.3 V I/O	8 mA drive, V _{OL} = 0.4 V	8	—	—	mA
		5 V-tolerant I/O					
		3.3 V I/O	12 mA drive, V _{OL} = 0.4 V	12	—	—	mA
		5 V-tolerant I/O					
3.3 V I/O	16 mA drive, V _{OL} = 0.4 V	16	—	—	mA		
5 V-tolerant I/O							
I _{OH}	High Level Output Current (GPIO Source Current)	3.3 V I/O	4 mA drive, V _{OH} = V _{DD} - 0.4 V	4	—	—	mA
		5 V-tolerant I/O					
		3.3 V I/O	8 mA drive, V _{OH} = V _{DD} - 0.4 V	8	—	—	mA
		5 V-tolerant I/O					
		3.3 V I/O	12 mA drive, V _{OH} = V _{DD} - 0.4 V	12	—	—	mA
		5 V-tolerant I/O					
3.3 V I/O	16 mA drive, V _{OH} = V _{DD} - 0.4 V	16	—	—	mA		
5 V-tolerant I/O							

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	
V _{OL}	Low Level Output Voltage	3.3 V I/O 5 V-tolerant I/O	4 mA drive, I _{OL} = 4 mA	—	—	0.4	V
		3.3 V I/O 5 V-tolerant I/O					
		3.3 V I/O 5 V-tolerant I/O	12 mA drive, I _{OL} = 12 mA	—	—	0.4	V
		3.3 V I/O 5 V-tolerant I/O					
		3.3 V I/O 5 V-tolerant I/O	4 mA drive, I _{OH} = 4 mA	V _{DD} - 0.4	—	—	—
V _{OH}	High Level Output Voltage	3.3 V I/O 5 V-tolerant I/O					
		3.3 V I/O 5 V-tolerant I/O	12 mA drive, I _{OH} = 12 mA	V _{DD} - 0.4	—	—	V
		3.3 V I/O 5 V-tolerant I/O					
		3.3 V I/O @ 3.3 V	—	60	—	—	kΩ
		5 V-tolerant I/O @ 3.3 V					
R _{PU}	Internal Pull-up Resistor	3.3 V I/O @ 3.3 V	—	60	—	kΩ	
R _{PD}	Internal Pull-down Resistor	3.3 V I/O @ 3.3 V	—	60	—	kΩ	
		5 V-tolerant I/O @ 3.3 V	—	60	—	kΩ	

ADC Characteristics

Table 19. ADC Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DDA}	Operating Voltage	—	2.0	3.3	3.6	V
V _{ADCIN}	A/D Converter Input Voltage Range	—	0	—	V _{REF+}	V
V _{REF+}	A/D Converter Reference Voltage	—	—	V _{DDA}	V _{DDA}	V
I _{ADC}	Current Consumption	V _{DDA} = 3.3 V, 1 Msps	—	0.4	0.5	mA
I _{ADC_DN}	Power Down Current Consumption	V _{DDA} = 3.3 V	—	—	0.01	μA
f _{ADC}	A/D Converter Clock	—	0.7	—	16	MHz
f _S	Sampling Rate	—	0.05	—	1	Msps
t _{DL}	Data Latency	—	—	13	—	1/f _{ADC} Cycles
t _{S&H}	Sampling & Hold Time	—	—	3	—	1/f _{ADC} Cycles
t _{ADCCONV}	A/D Converter Conversion Time	ADST[7:0] = 2	—	16	—	1/f _{ADC} Cycles
R _I	Input Sampling Switch Resistance	—	—	—	1	kΩ
C _I	Input Sampling Capacitance	No pin/pad capacitance included	—	4	—	pF
t _{SU}	Startup Time	—	—	—	1	μs
N	Resolution	—	—	12	—	bits

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
INL	Integral Non-linearity Error	$f_s = 750 \text{ ksps}$, $V_{DDA} = 2.5 \text{ V}$ $\sim 3.6 \text{ V}$, $\text{ADCLVM} = 0$	—	± 2	± 5	LSB
		$f_s = 750 \text{ ksps}$, $V_{DDA} = 2.0 \text{ V}$ $\sim 2.5 \text{ V}$, $\text{ADCLVM} = 1$				
DNL	Differential Non-linearity Error	$f_s = 750 \text{ ksps}$, $V_{DDA} = 2.5 \text{ V}$ $\sim 3.6 \text{ V}$, $\text{ADCLVM} = 0$	—	± 1	—	LSB
		$f_s = 750 \text{ ksps}$, $V_{DDA} = 2.0 \text{ V}$ $\sim 2.5 \text{ V}$, $\text{ADCLVM} = 1$				
E_o	Offset Error	—	—	—	± 10	LSB
E_G	Gain Error	—	—	—	± 10	LSB

Note: 1. Data based on characterization results only, not tested in production.

- Due to the A/D Converter input channel and GPIO pin-shared function design limitation, the V_{DDA} supply power of the A/D Converter has to be less than or equal to the V_{DD} supply power of the MCU in the application circuit.
- The figure below shows the equivalent circuit of the A/D Converter Sample-and-Hold input stage where C_i is the storage capacitor, R_i is the resistance of the sampling switch and R_s is the output impedance of the signal source V_s . Normally the sampling phase duration is approximately, $3.5/f_{\text{ADC}}$. The capacitance, C_i , must be charged within this time frame and it must be ensured that the voltage at its terminals becomes sufficiently close to V_s for accuracy. To guarantee this, R_s is not allowed to have an arbitrarily large value.

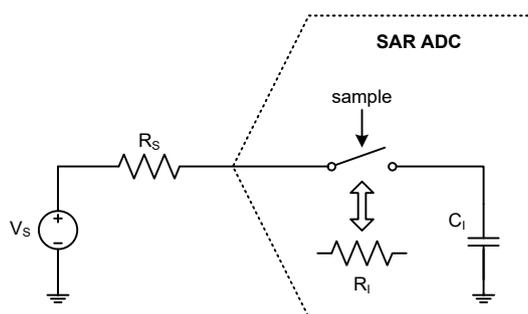


Figure 8. ADC Sampling Network Model

The worst case occurs when the extremities of the input range (0 V and V_{REF}) are sampled consecutively. In this situation a sampling error below $\frac{1}{4}$ LSB is ensured by using the following equation:

$$R_s < \frac{3.5}{f_{\text{ADC}} C_i \ln(2^{N+2})} - R_i$$

Where f_{ADC} is the ADC clock frequency and N is the ADC resolution ($N = 12$ in this case). A safe margin should be considered due to the pin/pad parasitic capacitances, which are not accounted for in this simple model.

If, in a system where the A/D Converter is used, there are no rail-to-rail input voltage variations between consecutive sampling phases, R_s may be larger than the value indicated by the equation above.

V_{DDA} Monitor Characteristics

Table 20. V_{DDA} Monitor Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
R	V _{DDA} Resistor Bridge	—	—	50	—	kΩ
Q	V _{DDA} Measurement Ratio	—	—	2	—	—
E _R	Ratio Error	—	-1	—	+1	%
t _{SVDDA}	ADC Sampling Time when Reading the V _{DDA}	—	5	—	—	μs

Note: Data based on characterization results only, not tested in production.

Bandgap Voltage Characteristics

Table 21. Bandgap Voltage Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DDA}	Operating Voltage	—	2.0	3.3	3.6	V
V _{BG}	Bandgap Reference Voltage	V _{DDA} = 2.0 V ~ 3.6 V @ T _A = -40 °C ~ 105 °C	1.206	1.218	1.23	V
I _{BG}	Bandgap Voltage Current	V _{DDA} = 3 V @ T _A = -40 °C ~ 105 °C	—	57	90	μA
I _{BG_BUF}	Bandgap Buffer Current	V _{DDA} = 3 V @ T _A = -40 °C ~ 105 °C, VREFEN = 1	—	75	120	μA
t _{BGST}	Bandgap Voltage Stable Time	V _{DDA} = 3.3 V @ T _A = -40 °C ~ 105 °C	—	5	20	μs
t _{SBG}	ADC Sampling Time when Reading Bandgap Voltage	—	5	—	—	μs
I _{BGPD}	Bandgap Voltage Power Down Current	—	—	—	0.01	μA

Note: Data based on characterization results only, not tested in production.

Internal Reference Voltage Characteristics

Table 22. Internal Reference Voltage Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DDA}	Operating Voltage	—	2.3	—	3.6	V
V _{REF}	Internal Reference Voltage after Factory Trimming at 25 °C Temperature	V _{DDA} ≥ 2.3 V VREFSEL[1:0] = 00	1.98	2.0	2.02	V
		V _{DDA} ≥ 2.8 V VREFSEL[1:0] = 01	2.475	2.5	2.525	
		V _{DDA} ≥ 3.0 V VREFSEL[1:0] = 10	2.673	2.7	2.727	
		V _{DDA} ≥ 3.3 V VREFSEL[1:0] = 11	2.97	3.0	3.03	
C _L	Load Capacitor	—	0.1	2.2	4.7	μF
ACC _{VREF}	Reference Voltage Accuracy after Trimming	V _{DDA} = 2.3 V ~ 3.6 V, V _{REF} = 2.0 V, T _A = -40 °C ~ 105 °C	-1.5	—	1.5	%
t _{STABLE}	Reference Voltage Stable Time	V _{DDA} = 3.3 V, V _{BG} has been stabled, C _L = 2.2 μF, T _A = -40 °C ~ 105 °C, VREFOE = 1	—	—	350	μs
I _{DD}	Operating Current	V _{DDA} = 3.3 V, V _{REF} = 2.0 V, T _A = -40 °C ~ 105 °C, VREFOE = 1	—	20	30	μA
I _{DDPWD}	Reference Voltage Power Down Current	—	—	—	0.01	μA

Temperature Sensor Characteristics

Table 23. Temperature Sensor Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DDA}	Operating Voltage	—	2.0	3.3	3.6	V
T _L	Linearity with Temperature	T _A = -20 °C ~ 60 °C	—	—	±3	°C
		T _A = -40 °C ~ -20 °C & T _A = 60 °C ~ 105 °C	—	—	±5	
Avg_Slope	Temperature Sensitivity (Slope Voltage Versus Temperature)	—	—	-4.454	—	mV/ °C
V ₂₅ ⁽²⁾	Voltage at 25 °C	Voltage at 25 °C (±5 °C)	—	0.804	—	V
t _{STS}	ADC Sampling Time when Reading Temperature Sensor	—	10	—	—	µs
I _{TS}	Temperature Sensor Current Consumption	V _{DDA} = 3.3 V @ T _A = -40 °C ~ 105 °C, TSEN = 1	—	100	165	µA
I _{TSPD}	Temperature Sensor Power Down Current	—	—	—	0.01	µA

Note: 1. Data based on characterization results only, not tested in production.

2. Measure at V_{DDA} = 3.0 V and internal ADVREFP = 3.0 V. The V₂₅ ADC conversion result is stored in the TSCAL.

Comparator Characteristics

Table 24. Comparator Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	
V _{DDA}	Operating Voltage	Comparator mode	2.0	3.3	3.6	V	
V _{IN}	Input Common Mode Voltage Range	CP or CN	V _{SSA}	—	V _{DDA}	V	
V _{IOS}	Input Offset Voltage ⁽¹⁾	—	-15	—	15	mV	
V _{HYS}	Input Hysteresis V _{DDA} = 3.3 V	No hysteresis, CMPHM [1:0] = 00	—	0	—	mV	
		Low hysteresis, CMPHM [1:0] = 01	—	30	—	mV	
		Middle hysteresis, CMPHM [1:0] = 10	—	70	—	mV	
		High hysteresis, CMPHM [1:0] = 11	—	100	—	mV	
t _{RT}	Response Time Input Overdrive = ±100 mV	High Speed Mode	V _{DDA} ≥ 2.7 V	—	50	100	ns
			V _{DDA} < 2.7 V	—	100	150	
		Low Speed Mode	—	2	5	µs	
I _{CMP}	Current Consumption V _{DDA} = 3.3 V	High Speed Mode	—	100	—	µA	
		Low Speed Mode	—	5	—	µA	
t _{CMPST}	Comparator Startup Time	Comparator enabled to output valid	—	—	1000	µs	
I _{CMP_DN}	Comparator Power Down Supply Current	CMPEN = 0, CVREN = 0, CVROE = 0	—	—	0.1	µA	
Comparator Voltage Reference (CVR)							
V _{CVR}	Output Range	—	V _{SSA}	—	V _{DDA}	V	
N _{Bits}	CVR Scaler Resolution	—	—	8	—	bits	
t _{CVRST}	Setting Time	V _{DDA} = 3.3 V, CVREFOE = 1, C _{LOAD} ≤ 100 pF; R _{LOAD} ≥ 50 kΩ, CVR Scaler Setting Time from CVRVAL = "00000000" to "11111111"	—	—	100	µs	

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _{CVR}	Current Consumption V _{DDA} = 3.3 V	CVREN = 1, CVROE = 0	—	30	—	μA
		CVREN = 1, CVROE = 1	—	45	—	μA

Note: Data based on characterization results only, not tested in production.

SCTM / GPTM / MCTM Characteristics

Table 25. SCTM / GPTM / MCTM Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
f _{TM}	Timer Clock Source for SCTM/GPTM/MCTM	—	—	—	48	MHz
t _{RES}	Timer Resolution Time	—	1	—	—	1/f _{TM}
f _{EXT}	External Signal Frequency on Channel 0 ~ 3	—	—	—	1/2	f _{TM}
RES	Timer Resolution	—	—	—	16	bits

I²C Characteristics

Table 26. I²C Characteristics

Symbol	Parameter	Standard Mode		Fast Mode		Fast Plus Mode		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
f _{SCL}	SCL Clock Frequency	—	100	—	400	—	1000	kHz
t _{SCL(H)}	SCL Clock High Time	4.5	—	1.125	—	0.45	—	μs
t _{SCL(L)}	SCL Clock Low Time	4.5	—	1.125	—	0.45	—	μs
t _{FALL}	SCL and SDA Fall Time	—	1.3	—	0.34	—	0.135	μs
t _{RISE}	SCL and SDA Rise Time	—	1.3	—	0.34	—	0.135	μs
t _{SU(SDA)}	SDA Data Setup Time	500	—	125	—	50	—	ns
t _{H(SDA)}	SDA Data Hold Time ⁽⁵⁾	0	—	0	—	0	—	ns
	SDA Data Hold Time ⁽⁶⁾	100	—	100	—	100	—	ns
t _{VD(SDA)}	SDA Data Valid Time	—	1.6	—	0.475	—	0.25	μs
t _{SU(STA)}	START Condition Setup Time	500	—	125	—	50	—	ns
t _{H(STA)}	START Condition Hold Time	0	—	0	—	0	—	ns
t _{SU(STO)}	STOP Condition Setup Time	500	—	125	—	50	—	ns

Note: 1. Data based on characterization results only, not tested in production.

2. To achieve 100 kHz standard mode, the peripheral clock frequency must be higher than 2 MHz.
3. To achieve 400 kHz fast mode, the peripheral clock frequency must be higher than 8 MHz.
4. To achieve 1 MHz fast plus mode, the peripheral clock frequency must be higher than 20 MHz.
5. The above characteristic parameters of the I²C bus timing are based on: COMBFILTEREN = 0 and SEQFILTER = 00.
6. The above characteristic parameters of the I²C bus timing are based on: COMBFILTEREN = 1 and SEQFILTER = 00.

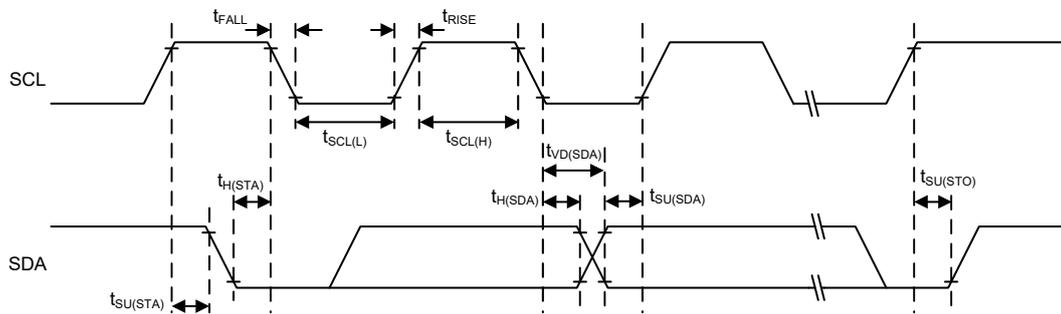


Figure 9. I²C Timing Diagrams

SPI Characteristics

Table 27. SPI Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
SPI Master Mode						
f_{SCK}	SPI Master Output SCK Clock Frequency	Master mode SPI peripheral clock frequency f_{PCLK}	—	—	$f_{PCLK}/2$	MHz
$t_{SCK(H)}$ $t_{SCK(L)}$	SCK Clock High and Low Time	—	$t_{SCK}/2 - 2$	—	$t_{SCK}/2 + 1$	ns
$t_{V(MO)}$	Data Output Valid Time	—	-	—	5	ns
$t_{H(MO)}$	Data Output Hold Time	—	2	—	—	ns
$t_{SU(MI)}$	Data Input Setup Time	—	5	—	—	ns
$t_{H(MI)}$	Data Input Hold Time	—	5	—	—	ns
SPI Slave Mode						
f_{SCK}	SPI Slave Input SCK Clock Frequency	Slave mode SPI peripheral clock frequency f_{PCLK}	—	—	$f_{PCLK}/3$	MHz
$Duty_{SCK}$	SPI Slave Input SCK Clock Duty Cycle	—	30	—	70	%
$t_{SU(SEL)}$	SEL Enable Setup Time	—	$3 \times t_{PCLK}$	—	—	ns
$t_{H(SEL)}$	SEL Enable Hold Time	—	$2 \times t_{PCLK}$	—	—	ns
$t_{A(SO)}$	Data Output Access Time	—	—	—	$3 \times t_{PCLK}$	ns
$t_{DIS(SO)}$	Data Output Disable Time	—	—	—	10	ns
$t_{V(SO)}$	Data Output Valid Time	—	—	—	25	ns
$t_{H(SO)}$	Data Output Hold Time	—	15	—	—	ns
$t_{SU(SI)}$	Data Input Setup Time	—	5	—	—	ns
$t_{H(SI)}$	Data Input Hold Time	—	4	—	—	ns

Note: 1. f_{SCK} is SPI output/input clock frequency and $t_{SCK} = 1/f_{SCK}$.
2. f_{PCLK} is SPI peripheral clock frequency and $t_{PCLK} = 1/f_{PCLK}$.

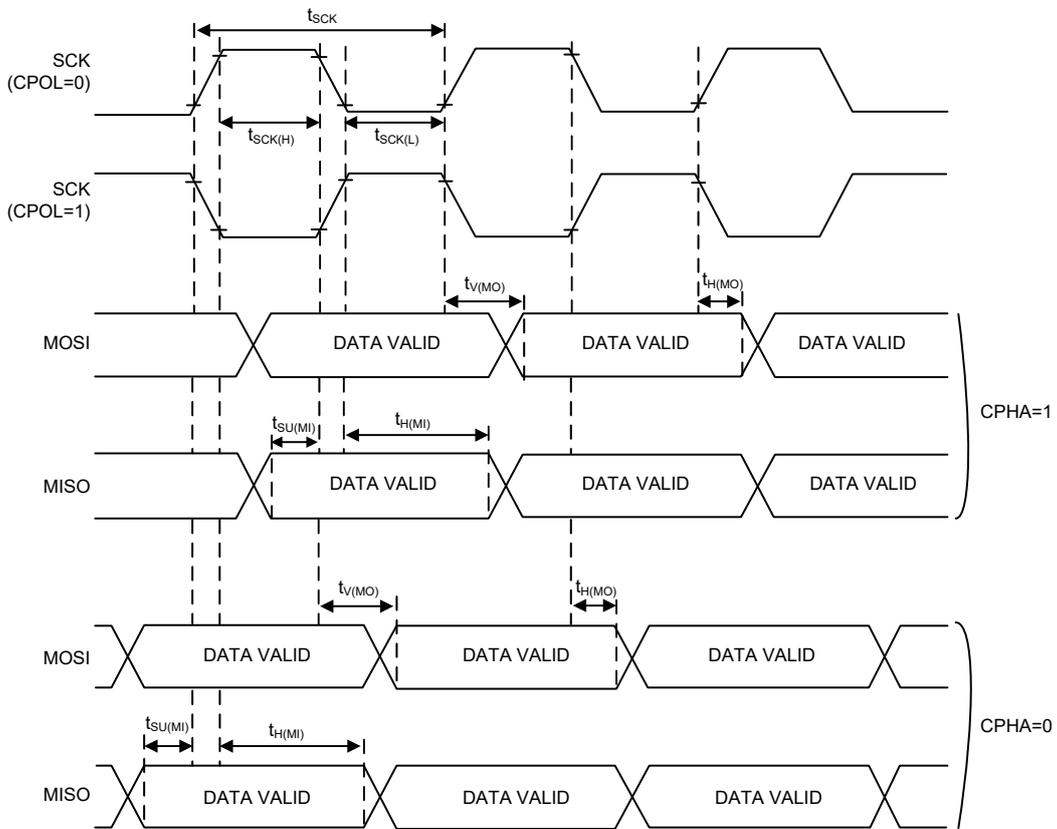


Figure 10. FSPI Timing Diagrams – SPI Master Mode

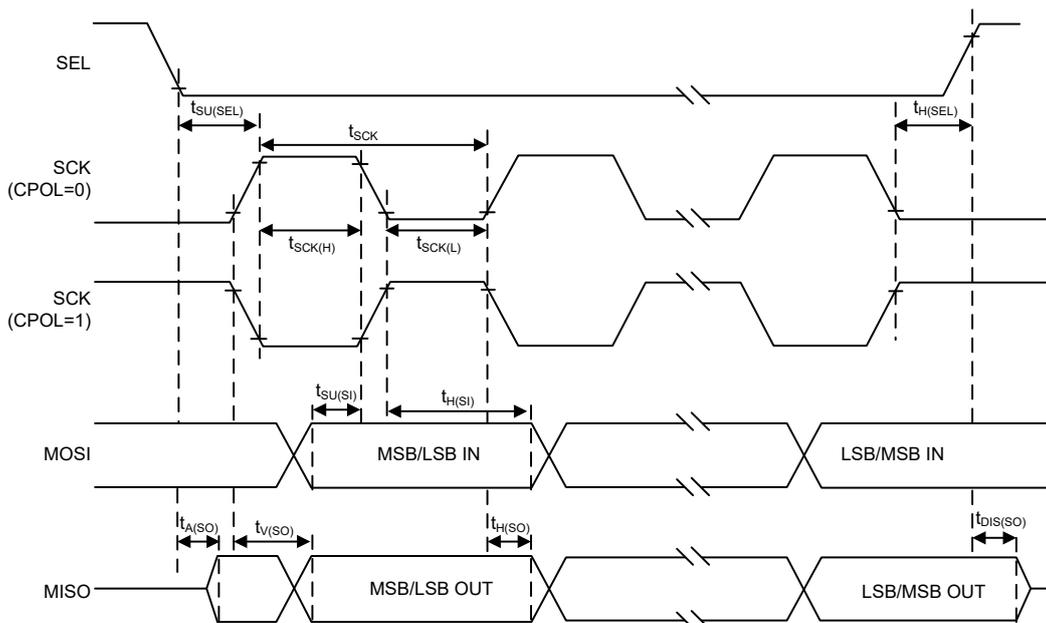


Figure 11. SPI Timing Diagrams – SPI Slave Mode with CPHA = 1

USB Characteristics

The USB interface is USB-IF certified - Full Speed.

Table 28. USB DC Electrical Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{DD}	USB Operating Voltage	—	3.0	—	3.6	V
V_{DI}	Differential Input Sensitivity	USBDP - USBDM	0.2	—	—	V
V_{CM}	Common Mode Voltage Range	—	0.8	—	2.5	V
V_{SE}	Single-ended Receiver Threshold	—	0.8	—	2.0	V
V_{OL}	Pad Output Low Voltage	1.5 k Ω R_L to V_{DD}	0	—	0.3	V
V_{OH}	Pad Output High Voltage		2.8	—	3.6	V
V_{CRS}	Differential Output Signal Cross-point Voltage		1.3	—	2.0	V
Z_{DRV}	Driver Output Resistance	—	—	10	—	Ω
c_{iN}	Transceiver Pad Capacitance	—	—	—	20	pF

Note: 1. Data based on characterization results only, not tested in production.

2. The USB functionality is ensured down to 2.7 V but not for the full USB electrical characteristics which will experience degradation in the V_{DD} voltage range of 2.7 to 3.0 V.

3. R_L is the resistor load connected to the USB driver USBDP.

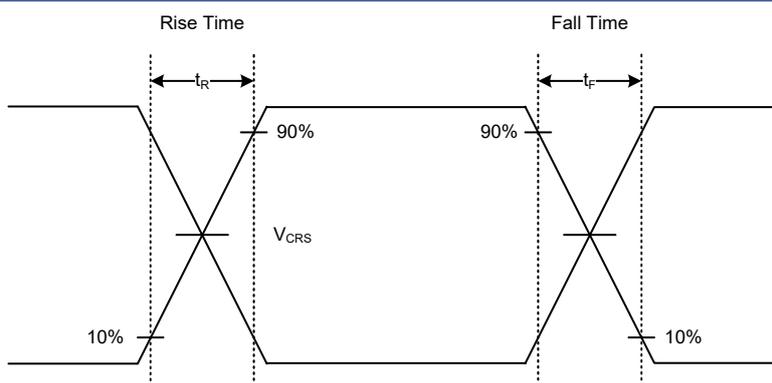


Figure 12. USB Signal Rise Time and Fall Time and Cross-Point Voltage (V_{CRS}) Definition

Table 29. USB AC Electrical Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
t_R	Rise Time	$C_L = 50$ pF	4	—	20	ns
t_F	Fall Time	$C_L = 50$ pF	4	—	20	ns
$t_{R/F}$	Rise Time / Fall Time Matching	$t_{R/F} = t_R / t_F$	90	—	110	%


6 Package Information

Note that the package information provided here is for consultation purposes only. As this information may be updated at regular intervals users are reminded to consult the [Holtek website](#) for the latest version of the [Package/Carton Information](#).

Additional supplementary information with regard to packaging is listed below. Click on the relevant section to be transferred to the relevant website page.

- Package Information (include Outline Dimensions, Product Tape and Reel Specifications)
- The Operation Instruction of Packing Materials
- Carton information


SAW Type 32-pin QFN (4 mm × 4 mm × 0.75 mm) Outline Dimensions

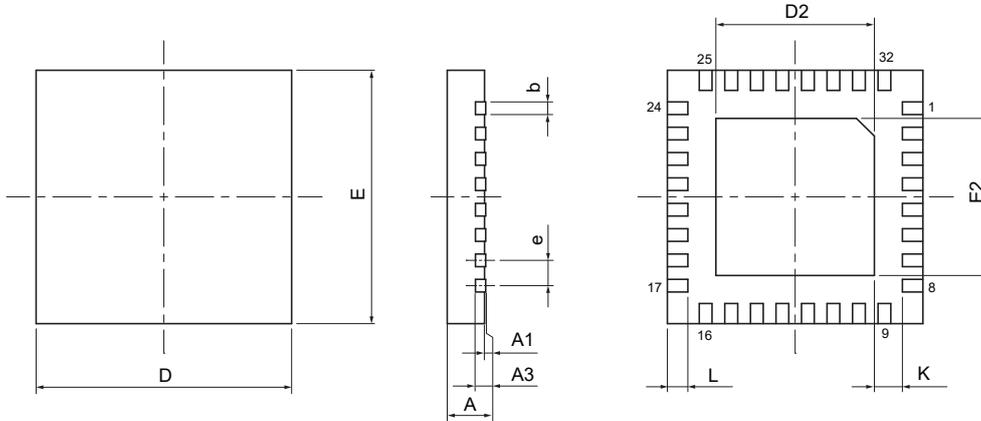

Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A	0.028	0.030	0.031
A1	0.000	0.001	0.002
A3	0.008 REF		
b	0.006	0.008	0.010
D	0.157 BSC		
E	0.157 BSC		
e	0.016 BSC		
D2	0.100	—	0.108
E2	0.100	—	0.108
L	0.010	—	0.018
K	0.008	—	—

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A3	0.203 REF		
b	0.15	0.20	0.25
D	4.00 BSC		
E	4.00 BSC		
e	0.40 BSC		
D2	2.55	—	2.75
E2	2.55	—	2.75
L	0.25	—	0.45
K	0.20	—	—


48-pin LQFP (7 mm × 7 mm) Outline Dimensions

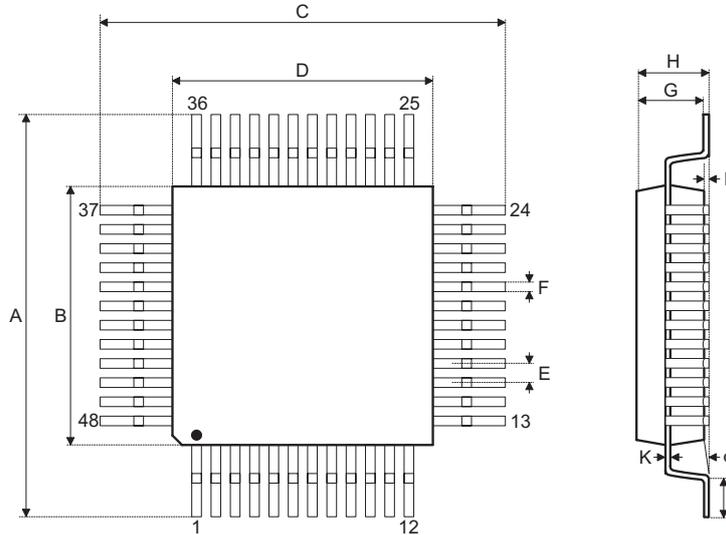

Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A		0.354 BSC	
B		0.276 BSC	
C		0.354 BSC	
D		0.276 BSC	
E		0.020 BSC	
F	0.007	0.009	0.011
G	0.053	0.055	0.057
H	—	—	0.063
I	0.002	—	0.006
J	0.018	0.024	0.030
K	0.004	—	0.008
α	0°	—	7°

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A		9.00 BSC	
B		7.00 BSC	
C		9.00 BSC	
D		7.00 BSC	
E		0.50 BSC	
F	0.17	0.22	0.27
G	1.35	1.40	1.45
H	—	—	1.60
I	0.05	—	0.15
J	0.45	0.60	0.75
K	0.09	—	0.20
α	0°	—	7°

64-pin LQFP (7 mm × 7 mm) Outline Dimensions

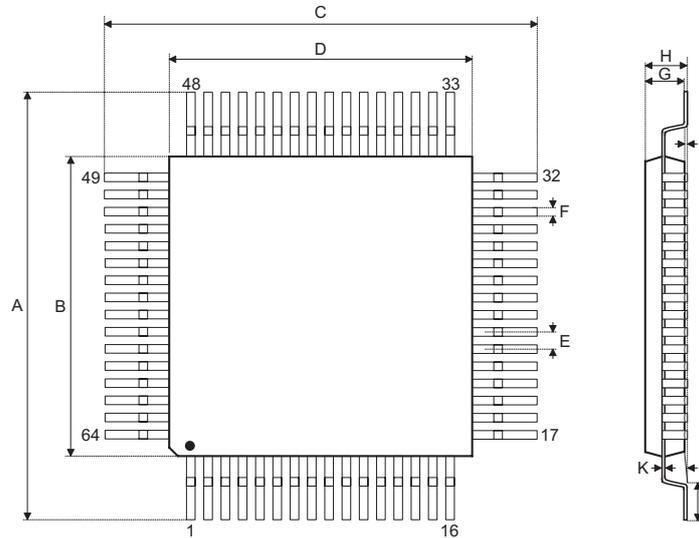

Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A		0.354 BSC	
B		0.276 BSC	
C		0.354 BSC	
D		0.276 BSC	
E		0.016 BSC	
F	0.005	0.007	0.009
G	0.053	0.055	0.057
H	—	—	0.063
I	0.002	—	0.006
J	0.018	0.024	0.030
K	0.004	—	0.008
α	0°	—	7°

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A		9.00 BSC	
B		7.00 BSC	
C		9.00 BSC	
D		7.00 BSC	
E		0.40 BSC	
F	0.13	0.18	0.23
G	1.35	1.40	1.45
H	—	—	1.60
I	0.05	—	0.15
J	0.45	0.60	0.75
K	0.09	—	0.20
α	0°	—	7°

Copyright© 2026 by HOLTEK SEMICONDUCTOR INC. All Rights Reserved.

The information provided in this document has been produced with reasonable care and attention before publication, however, HOLTEK does not guarantee that the information is completely accurate. The information contained in this publication is provided for reference only and may be superseded by updates. HOLTEK disclaims any expressed, implied or statutory warranties, including but not limited to suitability for commercialization, satisfactory quality, specifications, characteristics, functions, fitness for a particular purpose, and non-infringement of any third-party's rights. HOLTEK disclaims all liability arising from the information and its application. In addition, HOLTEK does not recommend the use of HOLTEK's products where there is a risk of personal hazard due to malfunction or other reasons. HOLTEK hereby declares that it does not authorize the use of these products in life-saving, life-sustaining or safety critical components. Any use of HOLTEK's products in life-saving/sustaining or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold HOLTEK harmless from any damages, claims, suits, or expenses resulting from such use. The information provided in this document, including but not limited to the content, data, examples, materials, graphs, and trademarks, is the intellectual property of HOLTEK (and its licensors, where applicable) and is protected by copyright law and other intellectual property laws. No license, express or implied, to any intellectual property right, is granted by HOLTEK herein. HOLTEK reserves the right to revise the information described in the document at any time without prior notice. For the latest information, please contact us.