



HV04H  
HV06H

## 64-Channel Serial To Parallel Converter With Ruggedized High Voltage CMOS Outputs

### Ordering Information

Device	Recommended Operating $V_{PP}$ Max	Package Options					
		84-Pad Ceramic Leadless Chip Carrier	84-J Lead Plastic Chip Carrier	80-Lead Quad Cerpac Gullwing	80-Lead Quad Plastic Gullwing	80-Lead 35mm TAB Tape	Die
HV04H	60V	HV04H06LC	HV04H06PJ	HV04H06DG	HV04H06PG	HV04H06T	HV04H06X
	80V	HV04H08LC	HV04H08PJ	HV04H08DG	HV04H08PG	HV04H08T	HV04H08X
HV06H	60V	HV06H06LC	HV06H06PJ	HV06H06DG	HV06H06PG	HV06H06T	HV06H06X
	80V	HV06H08LC	HV06H08PJ	HV06H08DG	HV06H08PG	HV06H08T	HV06H08X

### Features

- HVCMOS® Technology
- Output voltages up to 80V
- Low power level shifting
- Shift register speed 8 MHz
- Latched data outputs
- Output polarity and blanking
- CMOS compatible inputs
- Forward and reverse shifting options

### General Description

The HV04H and HV06H are low voltage serial to high voltage parallel converters with push-pull outputs. These devices have been designed for use as drivers for AC-electroluminescent displays. They can also be used in any application requiring multiple output high voltage current sourcing and sinking capabilities such as driving plasma panels, vacuum fluorescent, or large matrix LCD displays.

These devices consist of a 64-bit shift register, 64 latches, and control logic to perform the polarity select and blanking of the outputs. HVout1 is connected to the first stage of the shift register through the polarity and blanking logic. Data is shifted through the shift register on the low to high transition of the clock. The HV04H shifts data in the counterclockwise direction when viewed from the top of the package and the HV06H shifts in the clockwise direction. A data output buffer is provided for cascading devices. This output reflects the current status of the last bit of the shift register (HVout64). Operation of the shift register is not affected by the LE (latch enable), BL (blanking), or the POL (polarity) inputs. Transfer of data from the shift register to the latch occurs when the LE (latch enable) is high. The data in the latch is stored when LE is low.

The HV04H and HV06H devices are ruggedized versions of our standard HV04 and HV06. They are designed to be used in circuits where ramping of the high voltage supply is not feasible. Care must be taken to limit the load capacitance and surge current in any particular application.

### Absolute Maximum Ratings<sup>1</sup>

Supply voltage, $V_{DD}$	-0.5V to +15V
Supply voltage, $V_{PP}$ <sup>2</sup>	-0.5V to +80V
Logic input levels	-0.5V to $V_{DD}$ +0.5V
Ground current <sup>3</sup>	3.0A
High voltage supply current <sup>3</sup>	2.6A
Continuous total power dissipation <sup>4</sup>	1900mW
Operating temperature range	-40°C to +85°C
Storage temperature range	-65°C to +150°C

- Notes:
- 1 All voltages are referenced to ground.
  2. These devices have been designed to be used in applications which either switch the  $V_{PP}$  supply to ground before changing the state of the high voltage outputs or limit the current through each output.
  3. Connection to all power and ground pads is required. Duty cycle is limited by the total power dissipated in the package.
  4. For operation above 25°C ambient derate linearly to 85°C at 15mW/°C.

# Electrical Characteristics

(over recommended operating conditions unless noted)

## DC Characteristics

Symbol	Parameter		Min	Typ	Max	Units	Conditions
$I_{DD}$	$V_{DD}$ Supply Current				25	mA	$f_{CLK} = 8MHz, f_{DATA} = 4MHz$ $LE = LOW$
$I_{DQ}$	Quiescent $V_{DD}$ Supply Current				0.25	mA	All $V_{IN} = 0V$ or $V_{DD}$
$I_{PP}$	High Voltage Supply Current				0.50	mA	$V_{PP} = 80V$ All outputs high
					0.50	mA	$V_{PP} = 80V$ All outputs low
$I_{IH}$	High-Level Logic Input Current				10	$\mu A$	$V_{IH} = V_{DD}$
$I_{IL}$	Low-Level Logic Input Current		-10			$\mu A$	$V_{IL} = 0V$
$V_{OH}$	High-Level Output	$HV_{OUT}$	74			V	$V_{PP} = 80V, IHV_{OUT} = -20mA$
		$V_{DD} - 1V$				V	$ID_{OUT} = -100\mu A$
$V_{OL}$	Low-Level Output	$HV_{OUT}$			6.0	V	$V_{PP} = 80V, IHV_{OUT} = +10mA$
		Data Out			1.0	V	$ID_{OUT} = +100\mu A$
$V_{OC}$	$HV_{OUT}$ Clamp Voltage				$V_{PP} + 1.5$ -1.5	V	$I_{OL} = +20mA$ $I_{OL} = -20mA$


## AC Characteristics

Symbol	Parameter	Min	Typ	Max	Units	Conditions
$t_{CLK}$	Clock Frequency			8	MHz	
$t_W$	Clock Width High or Low	62			ns	
$t_{SU}$	Data Setup Time Before Clock Rises	25			ns	
$t_H$	Data Hold Time After Clock Rises	10			ns	
$t_{WLE}$	Width of Latch Enable Pulse	62			ns	
$t_{DLE}$	$\bar{LE}$ Delay Time Rising Edge of Clock	25			ns	
$t_{SLE}$	$\bar{LE}$ Setup Time Before Rising Edge of Clock	30			ns	
$t_{ON}, t_{OFF}$	Time from Latch Enable to $HV_{OUT}$			500	$\mu s$	
$t_{DHL}$	Delay Time Clock to Data High to Low			100	ns	
$t_{DLH}$	Delay Time Clock to Data Low to High			100	ns	


## Recommended Operating Conditions

Symbol	Parameter	Min	Typ	Max	Units
$V_{DD}$	Logic supply voltage	10.8	12	13.2	V
$V_{PP}$	High voltage supply	-0.3		80	V
$V_{IH}$	High-level input voltage	$V_{DD} - 2V$		$V_{DD}$	V
$V_{IL}$	Low-level input voltage	0		2.0	V
$dV/dt$	$V_{PP}$ ramp rate			80	$V/\mu s$
$T_A$	Operating free-air temperature	-40		+85	$^{\circ}C$


# Input and Output Equivalent Circuits

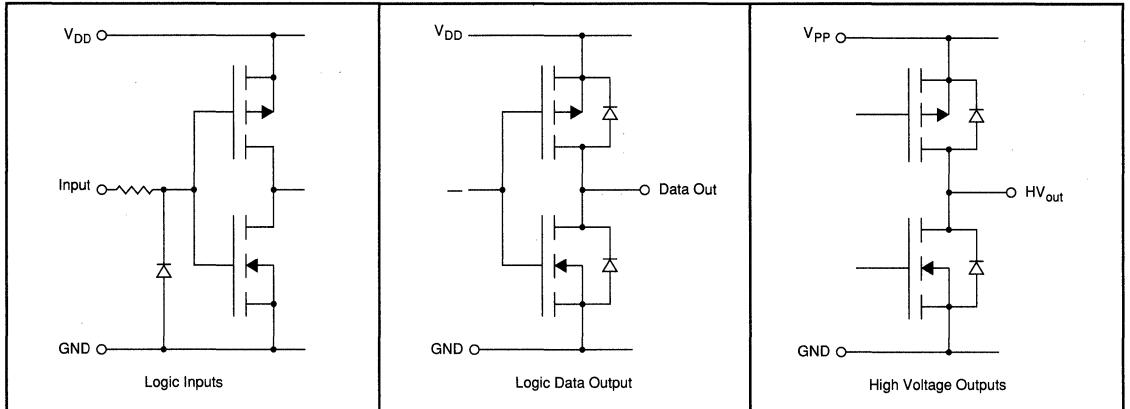

## Switching Waveforms

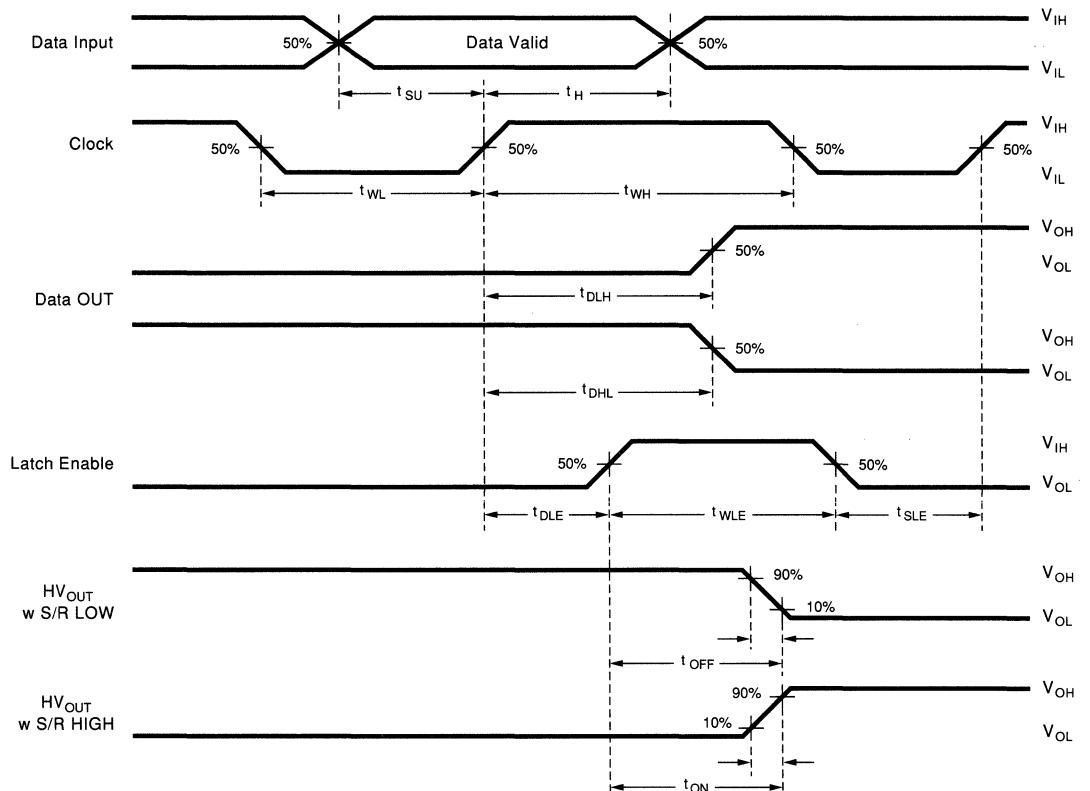

## Functional Block Diagram

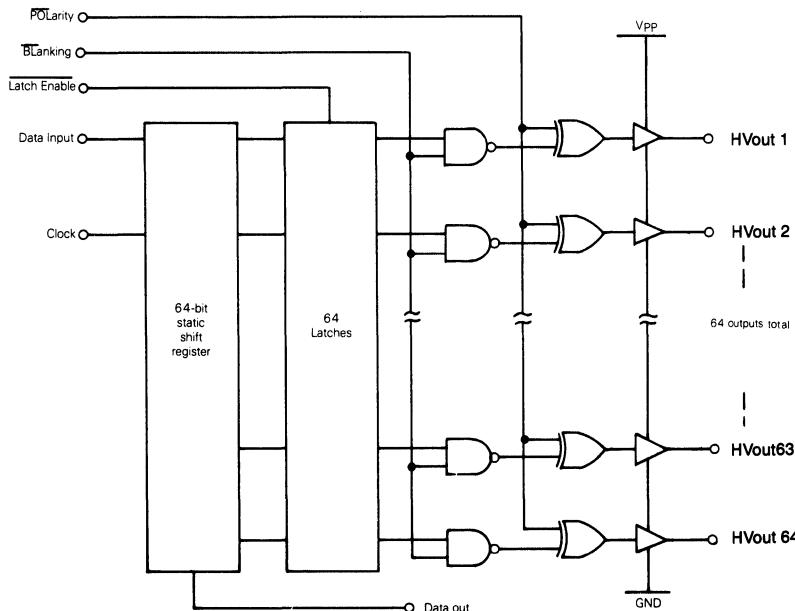

## Function Table



Function	Inputs					Outputs		
	Data	CLK	$\bar{LE}$	$\bar{BL}$	$\bar{POL}$	Shift Reg 1 2...64	HV Outputs 1 2...64	Data Out *
All on	X	X	X	L	L	* ... *	H H...H	*
All off	X	X	X	L	H	* ... *	L L...L	*
Invert mode	X	X	L	H	L	* ... *	- * ... *	*
Load S/R	H or L	$\uparrow$	L	H	H	H or L * ... *	* * ... *	*
Load Latches	X	H or L	$\uparrow$	H	H	* * ... *	* * ... *	*
	X	H or L	$\uparrow$	H	L	* * ... *	- * ... *	*
Transparent Latch mode	L	$\uparrow$	H	H	H	L * ... *	L * ... *	*
	H	$\uparrow$	H	H	H	H * ... *	H * ... *	*

Notes:

H = high level, L = low level, X = irrelevant,  $\uparrow$  = low-to-high transition.

\* = dependent on previous stage's state before the last CLK or last  $\bar{LE}$  high,

# Typical Performance Curves

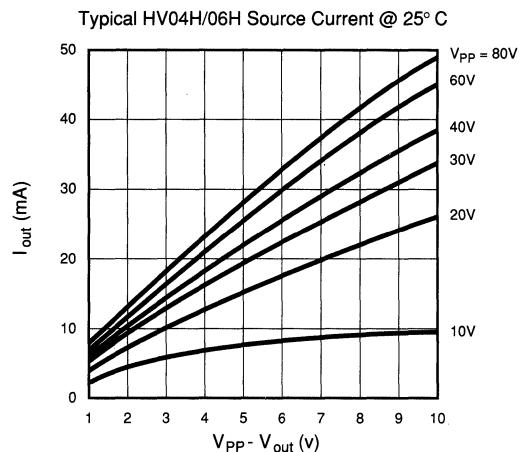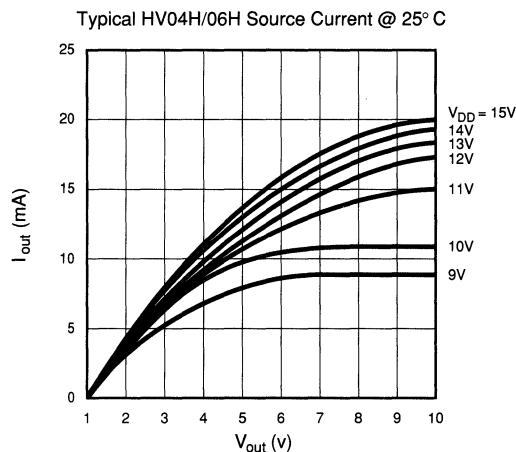

# Pin Configurations

## PJ and LC Packages


### HV04H

Pin	Function	Pin	Function
1	$V_{DD}$	43	HVout 33
2	LE	44	HVout 34
3	Data in	45	HVout 35
4	BL	46	HVout 36
5	HVout 1	47	HVout 37
6	HVout 2	48	HVout 38
7	HVout 3	49	HVout 39
8	HVout 4	50	HVout 40
9	HVout 5	51	HVout 41
10	HVout 6	52	HVout 42
11	N/C	53	N/C
12	$V_{PP}$	54	$V_{PP}$
13	GND	55	GND
14	HVout 7	56	HVout 43
15	HVout 8	57	HVout 44
16	HVout 9	58	HVout 45
17	HVout 10	59	HVout 46
18	HVout 11	60	HVout 47
19	HVout 12	61	HVout 48
20	HVout 13	62	HVout 49
21	HVout 14	63	HVout 50
22	HVout 15	64	HVout 51
23	HVout 16	65	HVout 52
24	HVout 17	66	HVout 53
25	HVout 18	67	HVout 54
26	HVout 19	68	HVout 55
27	HVout 20	69	HVout 56
28	HVout 21	70	HVout 57
29	HVout 22	71	HVout 58
30	GND	72	GND
31	$V_{PP}$	73	$V_{PP}$
32	N/C	74	N/C
33	HVout 23	75	HVout 59
34	HVout 24	76	HVout 60
35	HVout 25	77	HVout 61
36	HVout 26	78	HVout 62
37	HVout 27	79	HVout 63
38	HVout 28	80	HVout 64
39	HVout 29	81	POL
40	HVout 30	82	Data Out
41	HVout 31	83	CLK
42	HVout 32	84	GND

### HV06H

Pin	Function	Pin	Function
1	$V_{DD}$	43	HVout 32
2	LE	44	HVout 31
3	Data in	45	HVout 30
4	BL	46	HVout 29
5	HVout 64	47	HVout 28
6	HVout 63	48	HVout 27
7	HVout 62	49	HVout 26
8	HVout 61	50	HVout 25
9	HVout 60	51	HVout 24
10	HVout 59	52	HVout 23
11	N/C	53	N/C
12	$V_{PP}$	54	$V_{PP}$
13	GND	55	GND
14	HVout 58	56	HVout 22
15	HVout 57	57	HVout 21
16	HVout 56	58	HVout 20
17	HVout 55	59	HVout 19
18	HVout 54	60	HVout 18
19	HVout 53	61	HVout 17
20	HVout 52	62	HVout 16
21	HVout 51	63	HVout 15
22	HVout 50	64	HVout 14
23	HVout 49	65	HVout 13
24	HVout 48	66	HVout 12
25	HVout 47	67	HVout 11
26	HVout 46	68	HVout 10
27	HVout 45	69	HVout 9
28	HVout 44	70	HVout 8
29	HVout 43	71	HVout 7
30	GND	72	GND
31	$V_{PP}$	73	$V_{PP}$
32	N/C	74	N/C
33	HVout 42	75	HVout 6
34	HVout 41	76	HVout 5
35	HVout 40	77	HVout 4
36	HVout 39	78	HVout 3
37	HVout 38	79	HVout 2
38	HVout 37	80	HVout 1
39	HVout 36	81	POL
40	HVout 35	82	Data Out
41	HVout 34	83	CLK
42	HVout 33	84	GND

## Package Outline

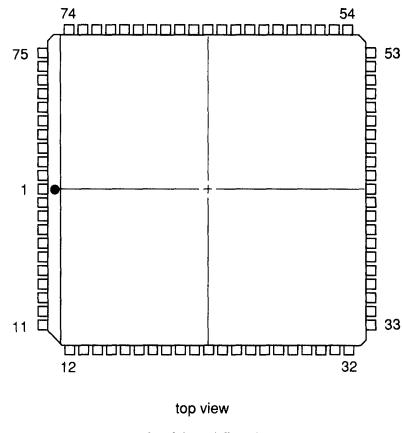

## Pin Configurations

### PG and DG Packages

#### HV04H

Pin	Function	Pin	Function
1	GND	41	GND
2	V <sub>PP</sub>	42	V <sub>PP</sub>
3	HVout 59	43	HVout 23
4	HVout 60	44	HVout 24
5	HVout 61	45	HVout 25
6	HVout 62	46	HVout 26
7	HVout 63	47	HVout 27
8	HVout 64	48	HVout 28
9	POL	49	HVout 29
10	Data Out	50	HVout 30
11	CLK	51	HVout 31
12	GND	52	HVout 32
13	V <sub>DD</sub>	53	HVout 33
14	LE	54	HVout 34
15	Data Out	55	HVout 35
16	BL	56	HVout 36
17	HVout 1	57	HVout 37
18	HVout 2	58	HVout 38
19	HVout 3	59	HVout 39
20	HVout 4	60	HVout 40
21	HVout 5	61	HVout 41
22	HVout 6	62	HVout 42
23	V <sub>PP</sub>	63	V <sub>PP</sub>
24	GND	64	GND
25	HVout 7	65	HVout 43
26	HVout 8	66	HVout 44
27	HVout 9	67	HVout 45
28	HVout 10	68	HVout 46
29	HVout 12	69	HVout 47
30	HVout 13	70	HVout 48
31	HVout 14	71	HVout 49
32	HVout 15	72	HVout 50
33	HVout 16	73	HVout 51
34	HVout 17	74	HVout 52
35	HVout 18	75	HVout 53
36	HVout 19	76	HVout 54
37	HVout 20	77	HVout 55
38	HVout 21	78	HVout 56
39	HVout 22	79	HVout 57
40	HVout 23	80	HVout 58

#### HV06H

Pin	Function	Pin	Function
1	GND	41	GND
2	V <sub>PP</sub>	42	V <sub>PP</sub>
3	HVout 6	43	HVout 42
4	HVout 5	44	HVout 41
5	HVout 4	45	HVout 40
6	HVout 3	46	HVout 39
7	HVout 2	47	HVout 38
8	HVout 1	48	HVout 37
9	POL	49	HVout 36
10	Data Out	50	HVout 35
11	CLK	51	HVout 34
12	GND	52	HVout 33
13	V <sub>DD</sub>	53	HVout 32
14	LE	54	HVout 31
15	Data Out	55	HVout 30
16	BL	56	HVout 29
17	HVout 1	57	HVout 28
18	HVout 2	58	HVout 27
19	HVout 3	59	HVout 26
20	HVout 4	60	HVout 25
21	HVout 5	61	HVout 24
22	HVout 6	62	HVout 23
23	V <sub>PP</sub>	63	V <sub>PP</sub>
24	GND	64	GND
25	HVout 7	65	HVout 58
26	HVout 8	66	HVout 57
27	HVout 9	67	HVout 56
28	HVout 10	68	HVout 55
29	HVout 12	69	HVout 54
30	HVout 13	70	HVout 53
31	HVout 14	71	HVout 52
32	HVout 15	72	HVout 51
33	HVout 16	73	HVout 50
34	HVout 17	74	HVout 49
35	HVout 18	75	HVout 48
36	HVout 19	76	HVout 47
37	HVout 20	77	HVout 46
38	HVout 21	78	HVout 45
39	HVout 22	79	HVout 44
40	HVout 23	80	HVout 43

## Package Outline

