

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF HYDIS AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF HYDIS AND MUST BE RETURNED TO HYDIS UPON ITS REQUEST

TITLE : HV121WX5 -121

Product Specification

HYDIS Technologies

SPEC. NUMBER	PRODUCT GROUP	REV.	ISSUE DATE	PAGE
S864-1428	TFT LCD	0	2010.12.15	1 OF 32

B2005-C001-D (1/3)


A4(210 X 297)



 HYDIS	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

REVISION HISTORY

REV.	ECN NO.	DESCRIPTION OF CHANGES	DATE	PREPARED
0		▪ Initial Release	10.12.15	J.T LEE

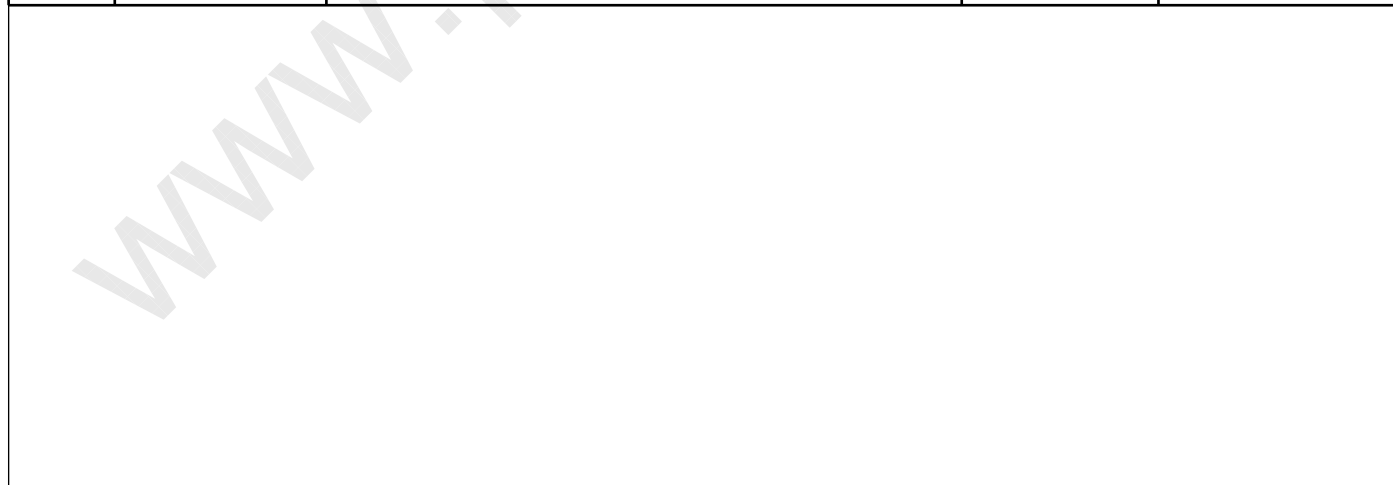

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 2 OF 32
---------------------------	--	-----------------

B2005-C001-D (2/3)

A4(210 X 297)

**HYDIS****PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

Contents

No	Item	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	9
5.0	Interface Connections	14
6.0	Input Signals, Basic Display Colors & Gray Scale of Colors	16
7.0	Power Sequence	19
8.0	Mechanical Characteristics	20
9.0	Mechanical Drawing	21
10.0	Reliability Test	23
11.0	Handling & Cautions	23
12.0	Labels	25
13.0	Packing Information	27
14.0	EDID	29

SPEC. NUMBER

S864-1428

SPEC TITLE

HV121WX5-121 Product Specification

PAGE

3 OF 32

B2005-C001-D (3/3)

A4(210 X 297)



HYDIS

PRODUCT GROUP

REV

ISSUE DATE

TFT LCD PRODUCT


0

2010.12.15

1.0 GENERAL DESCRIPTION

1.1 Introduction

HV121WX5-121 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 12.1 inch diagonally measured active area with WXGA resolutions (1280 horizontal by 800 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type.

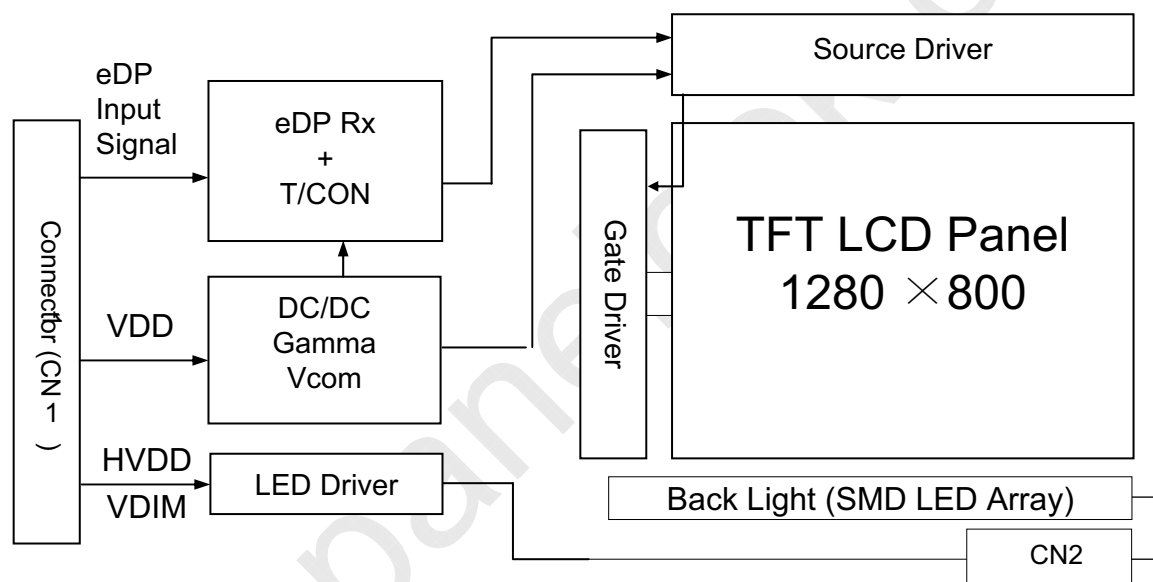

1.2 Features

- Thin and Light Weight
- 3.3 V Logic Power Supply
- 12V Back-light Power Supply
- 1 lane eDP Interface
- SMD LED (48EA) Array (Bottom Side/Horizontal Direction)
- 262,144 Colors
- Data Enable Signal Mode
- Side Mounting Frame
- Green Product (RoHS)

 SPEC. NUMBER
S864-1428

 SPEC TITLE
HV121WX5-121 Product Specification

 PAGE
4 OF 32

B2005-C001-D (3/3)

A4(210 X 297)

 HYDIS	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

1.3 Application

- Tablet PC (Wide type)

1.4 General Specifications

Parameter	Specification	Unit	Remarks
Active area	261.12(H) × 163.20(V)	mm	
Number of pixels	1280(H) × 800(V)	pixels	
Pixel pitch	0.204(H) × 0.204(V)	mm	
Pixel arrangement	RGB Vertical Stripe		
Display colors	262,144	colors	
Display mode	Normally Black		
Outline dimension	276.8±0.3(H) × 180.0±0.3(V) × 6.8(D:Max.)	mm	Note 1
Weight	265(Typ.)	g	Note 2
Back-light	SMD LED (48EA) Array		

Note 1 : at PCB side

Note 2 : without digitizer

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 5 OF 32
B2005-C001-D (3/3)		A4(210 X 297)



HYDIS

PRODUCT GROUP

REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit.

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Logic Power Supply Voltage	V _{DD}	-0.3	4.0	V	
Logic Power Supply Voltage	V _{IN}	-0.3	V _{DD} +0.3	V	
Back-light Power Supply Voltage	HV _{DD}	-0.3	40	V	
Back-light LED Current	I _{LED}	-	30	mA	Note 1
Back-light LED Reverse Voltage	V _R	-	5	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 1, Note 2
Storage Temperature	T _{SP}	-20	+60	°C	


Note 1. Ambient temperature vs allowable forward current are shown in the figure below.

Note 2. Temperature and relative humidity range are shown in the figure below.


90% RH Max. (40°C ≥ Ta)

Maximum wet - bulb temperature at 39°C or less. (> 40°C) No condensation.

Ambient Temperature vs. Maximum Forward Current

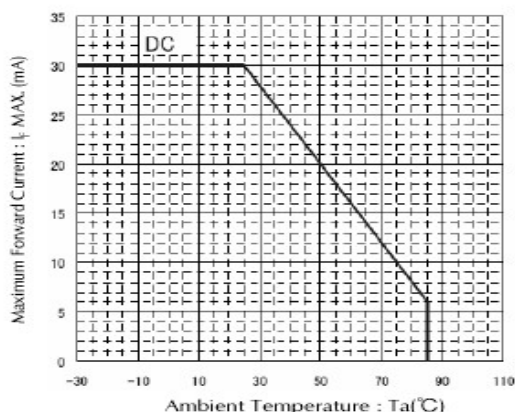

Relative Humidity

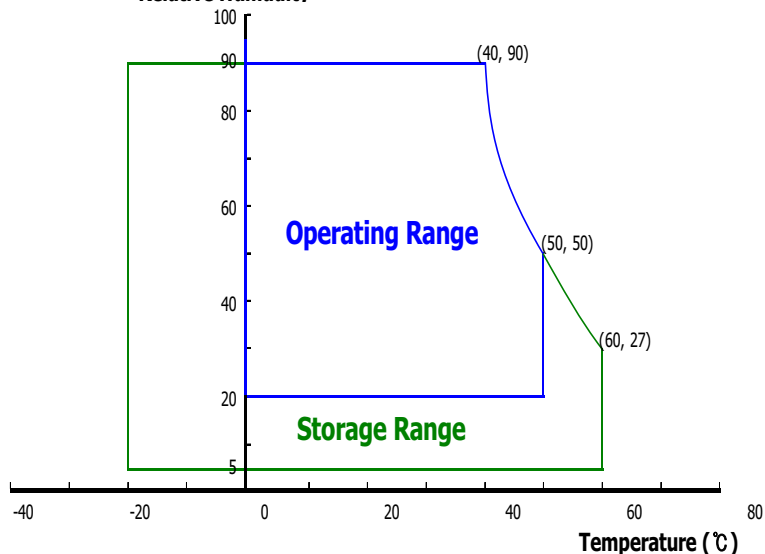

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
6 OF 32

	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical Specifications >

Parameter		Min.	Typ.	Max.	Unit	Remarks
Logic Power Supply Voltage	V_{DD}	3.0	3.3	3.6	V	Note 1
Logic Power Supply Current	I_{DD}	-	346	470	mA	Note 1
Back-light Power Supply Voltage	HV_{DD}	7.0	12.0	20	V	Note 2
Back-light Power Supply Current	I_{HVDD}	-	255	305	mA	Note 2, 3
Back-light Power Consumption	P_{BL}	-	3.06	3.66	W	Note 2, 3
Power Consumption (EBL)	P_{EBL}	-	1.83	2.0	W	Note 1, 2, 3
LED Driver's Efficiency	η	-	82	-	%	Note 2, 3
Back-light PWM Frequency	F_{PWM}	200	280	350	Hz	
High Level PWM Signal Voltage	V_{PWMH}	2.1	3.3	5.0	V	
Low Level PWM Signal Voltage	V_{PWML}	-	0	0.6	V	
Back-light LED Voltage / Back-light LED Total Voltage	V_{LED} / V_{BL}	-	3.1 / 37.2	3.5 / 42.0	V	Note 4
Back-light LED Current / Back-light LED Total Current	I_{LED} / I_{BL}	-	16.9 / 67.6	17.8 / 71.2	mA	Note 4
Life Time		10,000	-	-	Hrs	Based on LED
Power Consumption	P_D	-	1.14	TBD	W	Note 1
	P_{LED}	-	2.51	2.99	W	Note 4
	P_{total}	-	3.65	TBD	W	Note 1, 4

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25°C.

- a) Typ : Window XP pattern, b) Max : Vertical Sub line pattern
c) EBL : Mosaic pattern (32 X 32)

2. The power supply voltage and current is measured and specified at the interface connector of LCM including LED Driver.
3. Reference value, which is measured with LED Driver for 12V.
4. Reference value, which is measured without LED Driver.
5. Calculated value for reference ($V_{LED} \times I_{LED} \times \# \text{ of LEDs (48EA) }$).

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 7 OF 32
---------------------------	--	-----------------

B2005-C001-D (3/3)


A4(210 X 297)



HYDIS

PRODUCT GROUP
REV
ISSUE DATE
TFT LCD PRODUCT
0
2010.12.15

3.2 PWM Duty Ratio vs Brightness

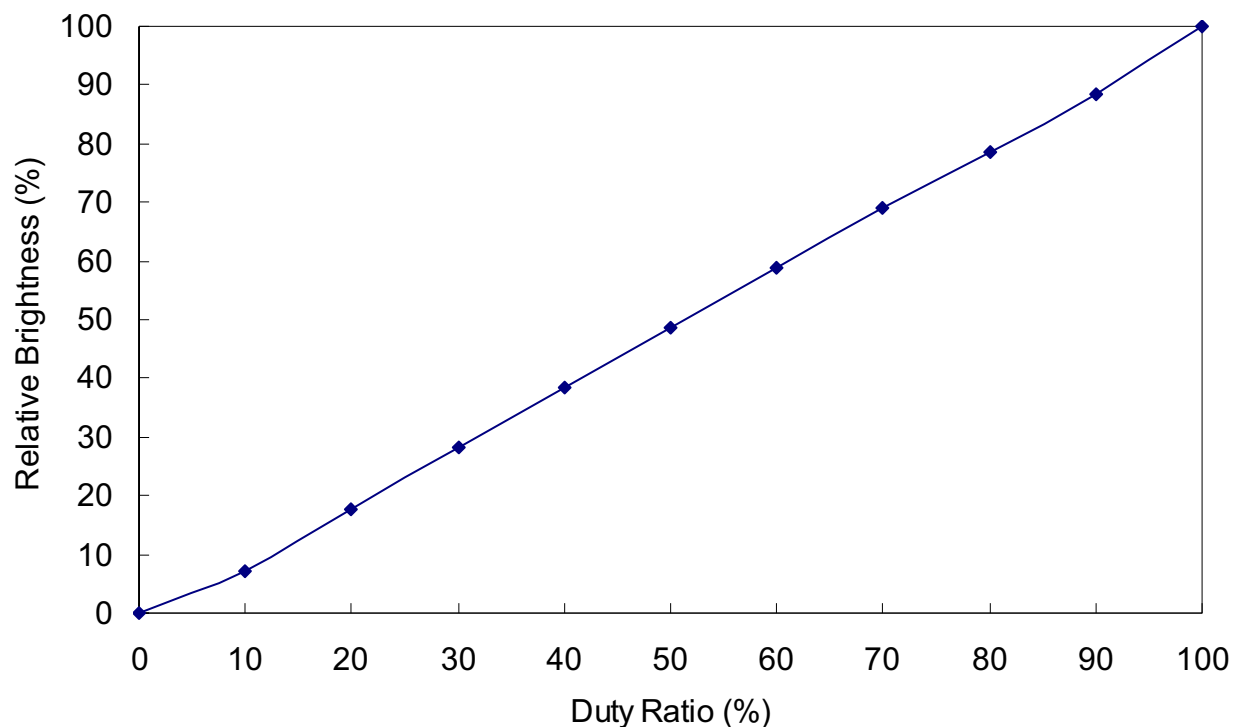
Notes :

In case of duty ratio 0%, LED can't illuminate itself so this state is LED off.

In case of duty ratio 100%, the brightness of LED is maximum and the state is LED on.

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
8 OF 32

B2005-C001-D (3/3)

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

4.0 OPTICAL SPECIFICATIONS

4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5A) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of Θ and Φ equal to 0° . We refer to $\Theta_{\varnothing=0}$ ($=\Theta_3$) as the 3 o'clock direction (the "right"), $\Theta_{\varnothing=90}$ ($=\Theta_{12}$) as the 12 o'clock direction ("upward"), $\Theta_{\varnothing=180}$ ($=\Theta_9$) as the 9 o'clock direction ("left") and $\Theta_{\varnothing=270}$ ($=\Theta_6$) as the 6 o'clock direction ("bottom"). While scanning Θ and/or \varnothing , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. V_{DD} shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications

<Table 4. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks
Viewing Angle range	Horizontal	Θ_3	CR > 10	-	89	90	Deg.	Note 1
		Θ_9		-	89	90	Deg.	
	Vertical	Θ_{12}		-	89	90	Deg.	
		Θ_6		-	89	90	Deg.	
Luminance Contrast ratio		CR	$\Theta = 0^\circ$	-	500	-		Note 2
Luminance of White	5 Points	Y_w	$\Theta = 0^\circ$	190	220	-	cd/m ²	Note 4
White Luminance uniformity	5 Points	ΔY_5		80	-	-	%	
	13 Points	ΔY_{13}		60	-	-		
White Chromaticity		W_x	$\Theta = 0^\circ$	0.283	0.313	0.343		Note 3
		W_y		0.299	0.329	0.359		
Reproduction of color	Red	R_x	$\Theta = 0^\circ$	0.533	0.563	0.593		
		R_y		0.324	0.354	0.384		
	Green	G_x		0.301	0.331	0.361		
		G_y		0.512	0.542	0.572		
	Blue	B_x		0.116	0.146	0.176		
		B_y		0.087	0.117	0.147		
Response Time		Total ($T_r + T_d$)	Ta= 25°C $\Theta = 0^\circ$	-	30	-	ms	Note 6
Cross Talk		CT	$\Theta = 0^\circ$	-	-	2.0	%	Note 7

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
9 OF 32

B2005-C001-D (3/3)

A4(210 X 297)

 HYDIS	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see Figure1).

2. Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state (see Figure1). Luminance Contrast Ratio (CR) is defined mathematically as $CR = \text{Luminance when displaying a white raster} / \text{Luminance when displaying a black raster}$.

3. Reference only / Standard Front Surface Treatment Measured with green cover glass. The color chromaticity coordinates specified in Table 4 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 10 OF 32
B2005-C001-D (3/3)		A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

4.3 Optical Measurements

Figure 1. Measurement Set Up


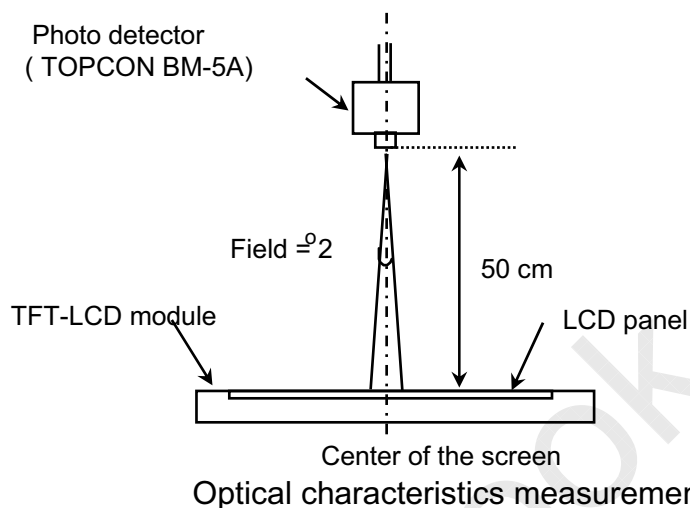


Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

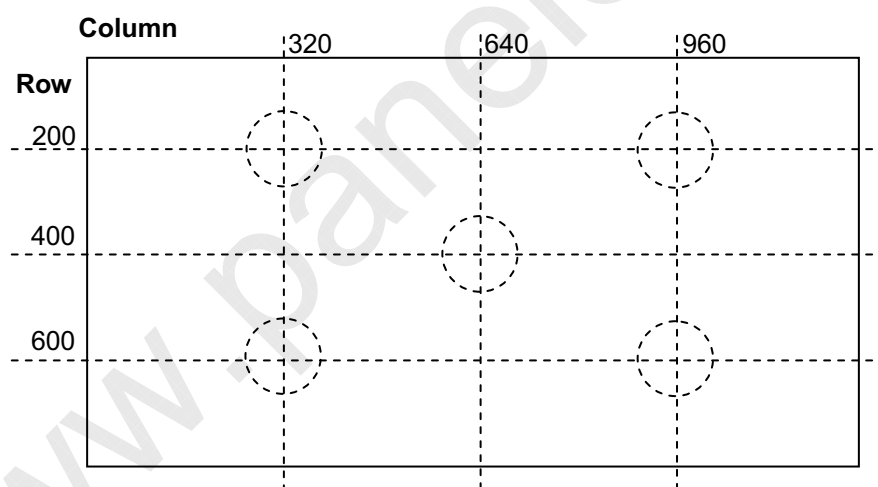

Note 4.

Luminance of white is defined as luminance values of 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 2 for a total of the measurements per display.

* $Y_w = (\text{Sum of 5 Points Luminance} / 5)$

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
11 OF 32

B2005-C001-D (3/3)

A4(210 X 297)



PRODUCT GROUP

REV


ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15


Figure 3. Uniformity Measurement Locations (13 points)

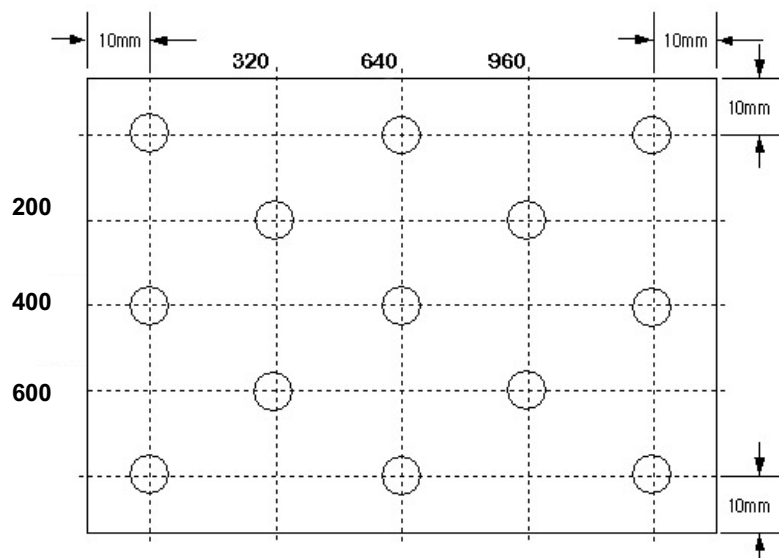

Note 5.

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5 = (\text{Minimum Luminance of five points} / \text{Maximum Luminance of five points}) \times 100\%$ (see Figure 2) , $\Delta Y13 = (\text{Minimum Luminance of 13 points} / \text{Maximum Luminance of 13 points}) \times 100\%$ (see Figure 3).

Figure 4. Response Time Testing

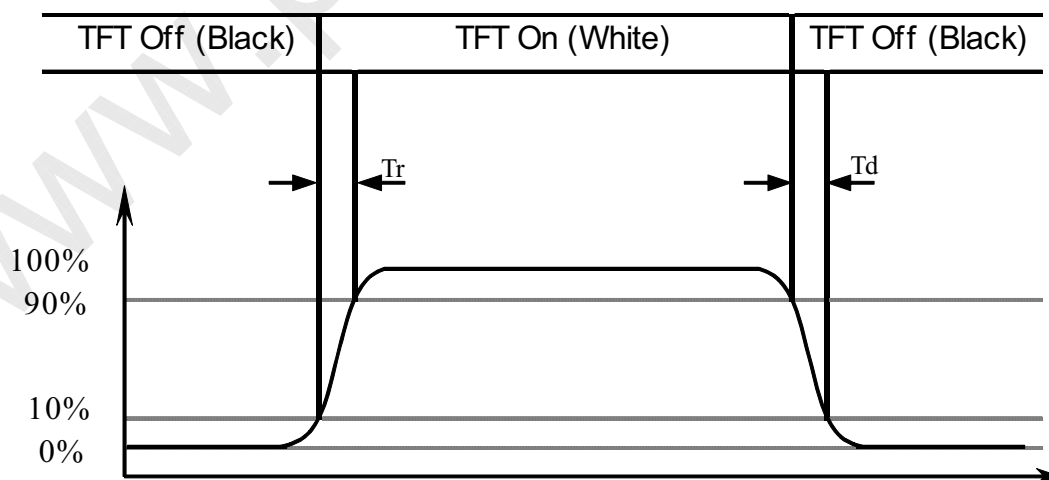SPEC. NUMBER
S864-1428SPEC TITLE
HV121WX5-121 Product SpecificationPAGE
12 OF 32

B2005-C001-D (3/3)

A4(210 X 297)



HYDIS

PRODUCT GROUP


REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

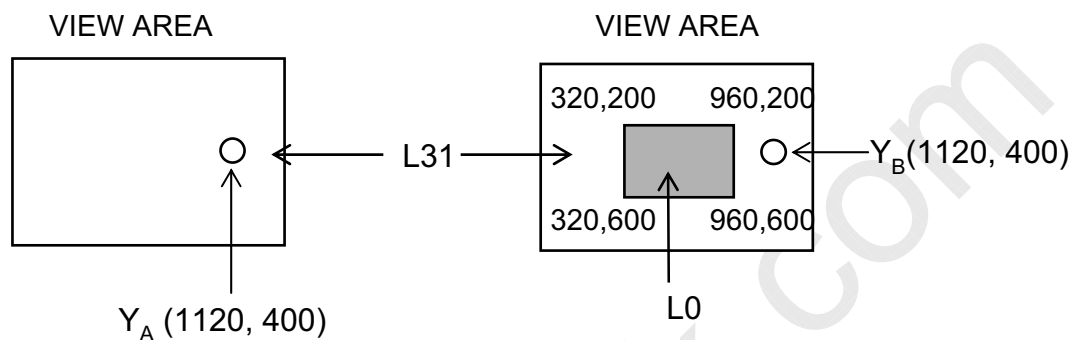Figure 5. Cross Modulation Test Description


$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_B} \right| \times 100$$

Where:

 Y_A = Initial luminance of measured area (cd/m²)

 Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

Note 6.

The electro-optical response time measurements shall be made as Figure 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Tr, and 90% to 10% is Td.

Note 7.

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark (Refer to Figure 5).

 SPEC. NUMBER
S864-1428

 SPEC TITLE
HV121WX5-121 Product Specification

 PAGE
13 OF 32

B2005-C001-D (3/3)

A4(210 X 297)

**HYDIS****PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

5.0 INTERFACE CONNECTIONS**5.1 Electrical Interface Connection****CN1 Interface Connector (I-PEX 20455-030E-02)**

Pin	Signal	Description
1	EDID_Check	Hydis internal use for EDID verification
2	NC	No Connection (Reserved)
3	NC	No Connection (Reserved)
4	NC	No Connection (Reserved)
5	H_GND	High Speed (Main Link) Ground
6	ML_Lane 0 (n)	Complement Signal-Main Link Lane
7	ML_Lane 0 (p)	True Signal-Main Link Lane
8	H_GND	High Speed (Main Link) Ground
9	AUX_CH(p)	True Signal-Auxiliary channel
10	AUX_CH(n)	Complement Signal-Auxiliary
11	H_GND	High Speed (Main Link) Ground
12	VCC	VCC for Module (3.3V)
13	VCC	VCC for Module (3.3V)
14	BIST	Built-In Self Test (active high)
15	GND	Ground
16	GND	Ground
17	HPD	Hot Plug Detect
18	BL_GND	BL Ground
19	BL_GND	BL Ground
20	BL_GND	BL Ground
21	BL_GND	BL Ground
22	BL_EN	BL On/Off (On: 2.0~3.3V, Off: 0~0.5V) / NC (100K pull-up) / 5V tolerant
23	BL_PWM	PWM for luminance control (200~1KHz, 3.3V, 10~100%, 0V=off) 5V tolerant
24	EDID_Check	Hydis internal use for EDID verification
25	EDID_Check	Hydis internal use for EDID verification
26	VBL	BL Power 6V-20V
27	VBL	BL Power 6V-20V
28	VBL	BL Power 6V-20V
29	VBL	BL Power 6V-20V
30	EDID_Check	Hydis internal use for EDID verification

SPEC. NUMBER

S864-1428

SPEC TITLE

HV121WX5-121 Product Specification

PAGE

14 OF 32

B2005-C001-D (3/3)

A4(210 X 297)

**HYDIS****PRODUCT GROUP**

REV

ISSUE DATE


TFT LCD PRODUCT

0

2010.12.15

5.2 Back-light Interface**CN2 LED FPC Connector (04-6298-009, Manufactured by Kyocera)**

Pin No.	Symbol	Function	Remark
1	Anode1	LED Anode Power Supply	LED Anode Power Supply (3.1V X 12EA = 37.2V)
2	Anode2	LED Anode Power Supply	
3	Anode3	LED Anode Power Supply	
4	Anode4	LED Anode Power Supply	
5	NC	Non-Connection	
6	Cathode1	LED Cathode Power Supply	LED Cathode Power Supply
7	Cathode2	LED Cathode Power Supply	
8	Cathode3	LED Cathode Power Supply	
9	Cathode4	LED Cathode Power Supply	

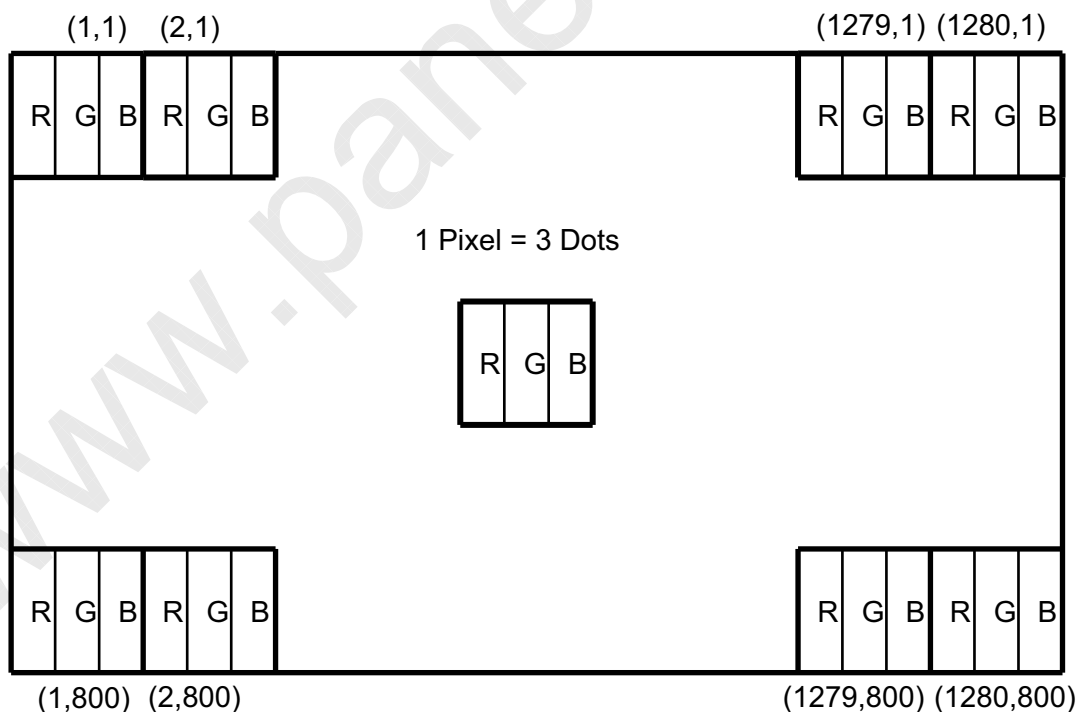5.4 Data Input Format

SPEC. NUMBER

S864-1428

SPEC TITLE

HV121WX5-121 Product Specification

PAGE

15 OF 32

B2005-C001-D (3/3)

A4(210 X 297)



HYDIS

PRODUCT GROUP

REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15


6.0. SIGNAL TIMING SPECIFICATIONS

6.1 The 12.1" WXGA LCM is operated by the only DE (Data enable) mode (LVDS Transmitter Input)

Item	Symbol	Min.	Typ.	Max.	Unit
Frame Period	T1	810	814	-	Lines
Vertical Display Period	T2	-	800	-	Lines
One line Scanning Period	T3	1350	1418	-	Clocks
Horizontal Display Period	T4	-	1280	-	Clocks
Clock Frequency	1/T5	-	69.3	-	MHz

7.0 SIGNAL TIMING WAVEFORMS

7.1 Timing Waveforms of Interface Signal

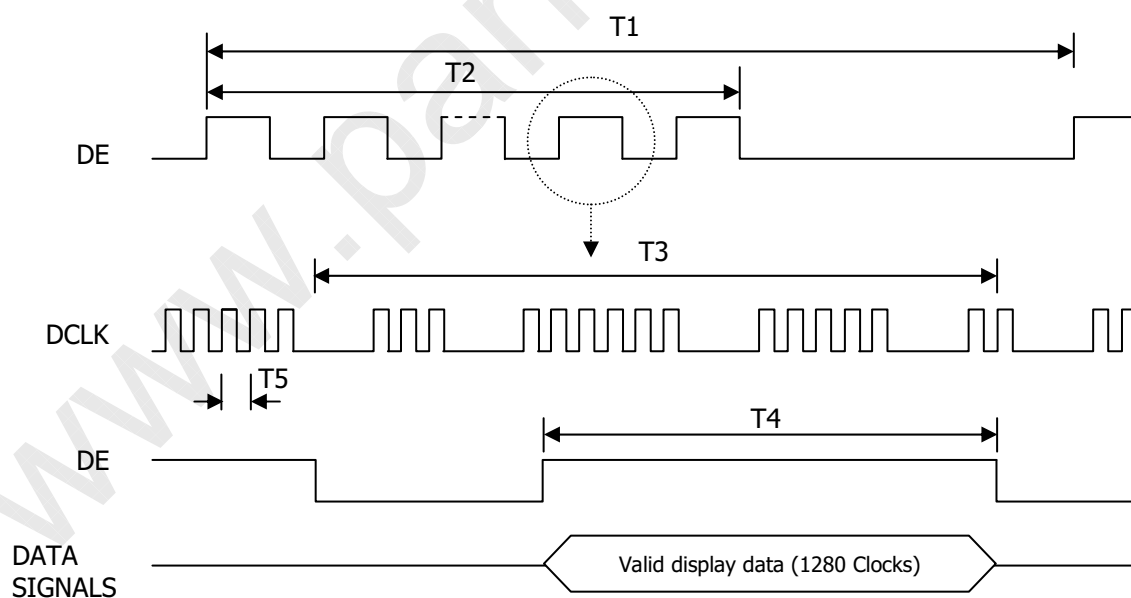
 SPEC. NUMBER
S864-1428

 SPEC TITLE
HV121WX5-121 Product Specification

 PAGE
16 OF 32

B2005-C001-D (3/3)

A4(210 X 297)



HYDIS

PRODUCT GROUP

REV

ISSUE DATE

TFT LCD PRODUCT

0


2010.12.15

7.2 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter

< LVDS Rx Interface Timing Specification >

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
CLKIN Period	tRCIP	12.50	14.43	25.00	nsec	
Input Data 0	tRIP0	-0.4	0.0	+0.4	nsec	
Input Data 1	tRIP1	tRCIP/7-0.4	tRCIP/7	tRCIP/7+0.4	nsec	
Input Data 2	tRIP2	2 × tRCIP/7-0.4	2 × tRCIP/7	2 × tRCIP/7+0.4	nsec	
Input Data 3	tRIP3	3 × tRCIP/7-0.4	3 × tRCIP/7	3 × tRCIP/7+0.4	nsec	
Input Data 4	tRIP4	4 × tRCIP/7-0.4	4 × tRCIP/7	4 × tRCIP/7+0.4	nsec	
Input Data 5	tRIP5	5 × tRCIP/7-0.4	5 × tRCIP/7	5 × tRCIP/7+0.4	nsec	
Input Data 6	tRIP6	6 × tRCIP/7-0.4	6 × tRCIP/7	6 × tRCIP/7+0.4	nsec	

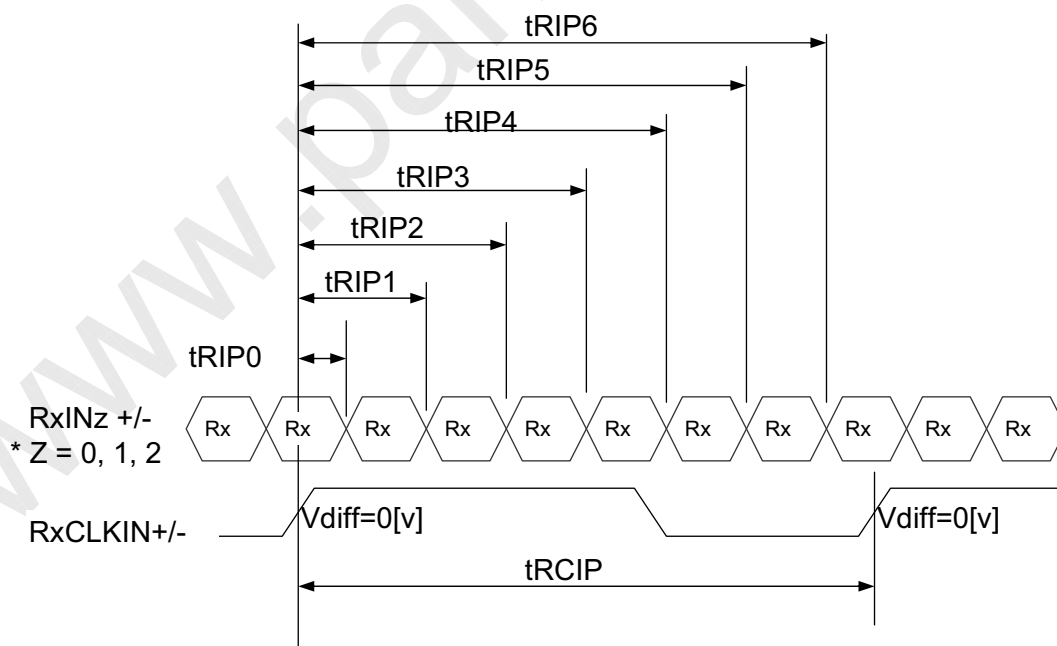

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
17 OF 32

B2005-C001-D (3/3)

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

6.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

Each color is displayed in sixty-four gray scales from a 6 bit data signal input. A total of 262,144 colors are derived from the resultant 18 bit data.

Colors & Gray Scale		Red Data						Green Data						Blue Data					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↓						↓						↓					
	▽	↓						↓						↓					
	Brighter	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
▽	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	
Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	
Gray Scale Of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	△	↓						↓						↓					
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
▽	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0	
Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	
Gray Scale Of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	△	↓						↓						↓					
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
▽	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0	
Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	
Gray Scale Of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0	1
	Darker	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0
	△	↓						↓						↓					
	▽	↓						↓						↓					
	Brighter	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1
▽	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1	0	
White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 18 OF 32
B2005-C001-D (3/3)		A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE


TFT LCD PRODUCT

0

2010.12.15

7.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

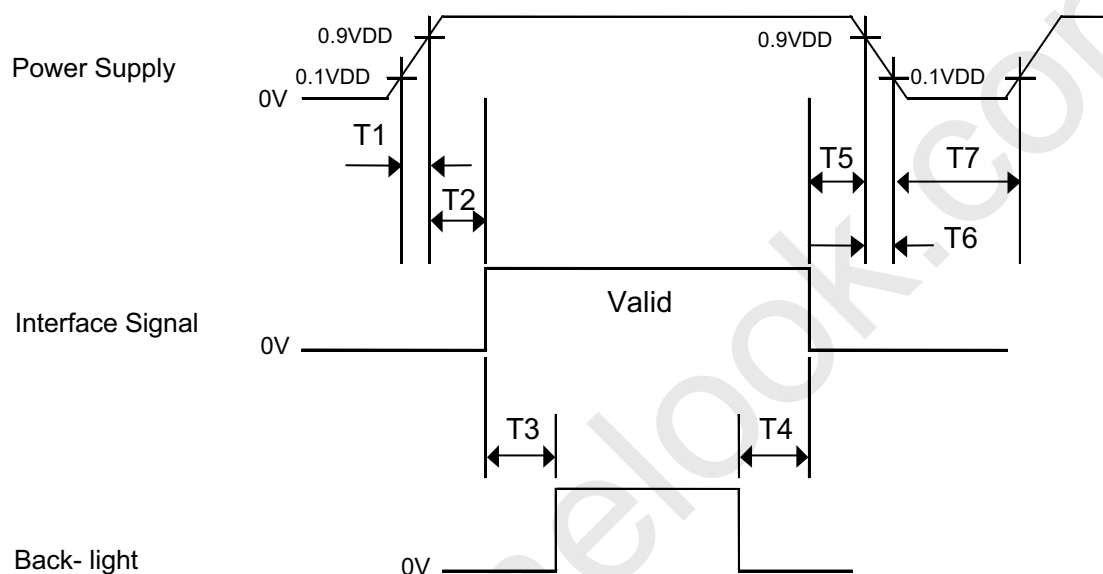

- $T1 \leq 10 \text{ ms}$
- $0 \leq T2 \leq 50 \text{ ms}$
- $200 \text{ ms} \leq T3$
- $200 \text{ ms} \leq T4$
- $0 \leq T5 \leq 50 \text{ ms}$
- $0 \leq T6 \leq 10 \text{ ms}$
- $500 \text{ ms} \leq T7$

- Notes :
1. When the power supply VDD is 0V, Keep the level of input signals on the low or keep high impedance.
 2. Do not keep the interface signal high impedance when power is on.
 3. Back Light must be turn on after power for logic and interface signal are valid.

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
19 OF 32

**HYDIS****PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

8.0 MECHANICAL CHARACTERISTICS

8.1 Dimensional Requirements

Figure 6 & 7 (located in 9.0) shows mechanical outlines for the model

Parameter	Specification	Unit
Active Area	261.12(H) X 163.20(V)	mm
Number of pixels	1280(H) X 800(V) (1 pixel = R + G + B dots)	
Pixel pitch	0.204(H) X 0.204(V)	
Pixel arrangement	RGB Vertical stripe	
Display colors	262,144	
Display mode	Normally Black	
Outline dimension	276.8 ± 0.3(H) × 180.0(V) ± 0.3 × 6.8(D:Max.)	mm
Weight	265(Typ.)	g
Back-light	SMD LED (48EA) Array	

8.2 Mounting

See Figure 6 & 7 & 8. (shown in 9.0)

Parameter	Specification	Unit
Torque of side mounting screw	2.5(Max.)	Kgf.cm ²
Torque of ground plate screw	1.5(Max.)	Kgf.cm ²
Torque of top side screw	2.5(Max.)	Kgf.cm ²

8.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

8.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 150lux. The manufacture shall furnish limit samples of the panel showing the light leakage acceptable.

SPEC. NUMBER

S864-1428

SPEC TITLE

HV121WX5-121 Product Specification

PAGE

20 OF 32

B2005-C001-D (3/3)

A4(210 X 297)



PRODUCT GROUP

REV

ISSUE DATE


TFT LCD PRODUCT

0

2010.12.15

9.0 Mechanical Drawing

Figure 6. TFT-LCD Module Outline Dimension (Front View)

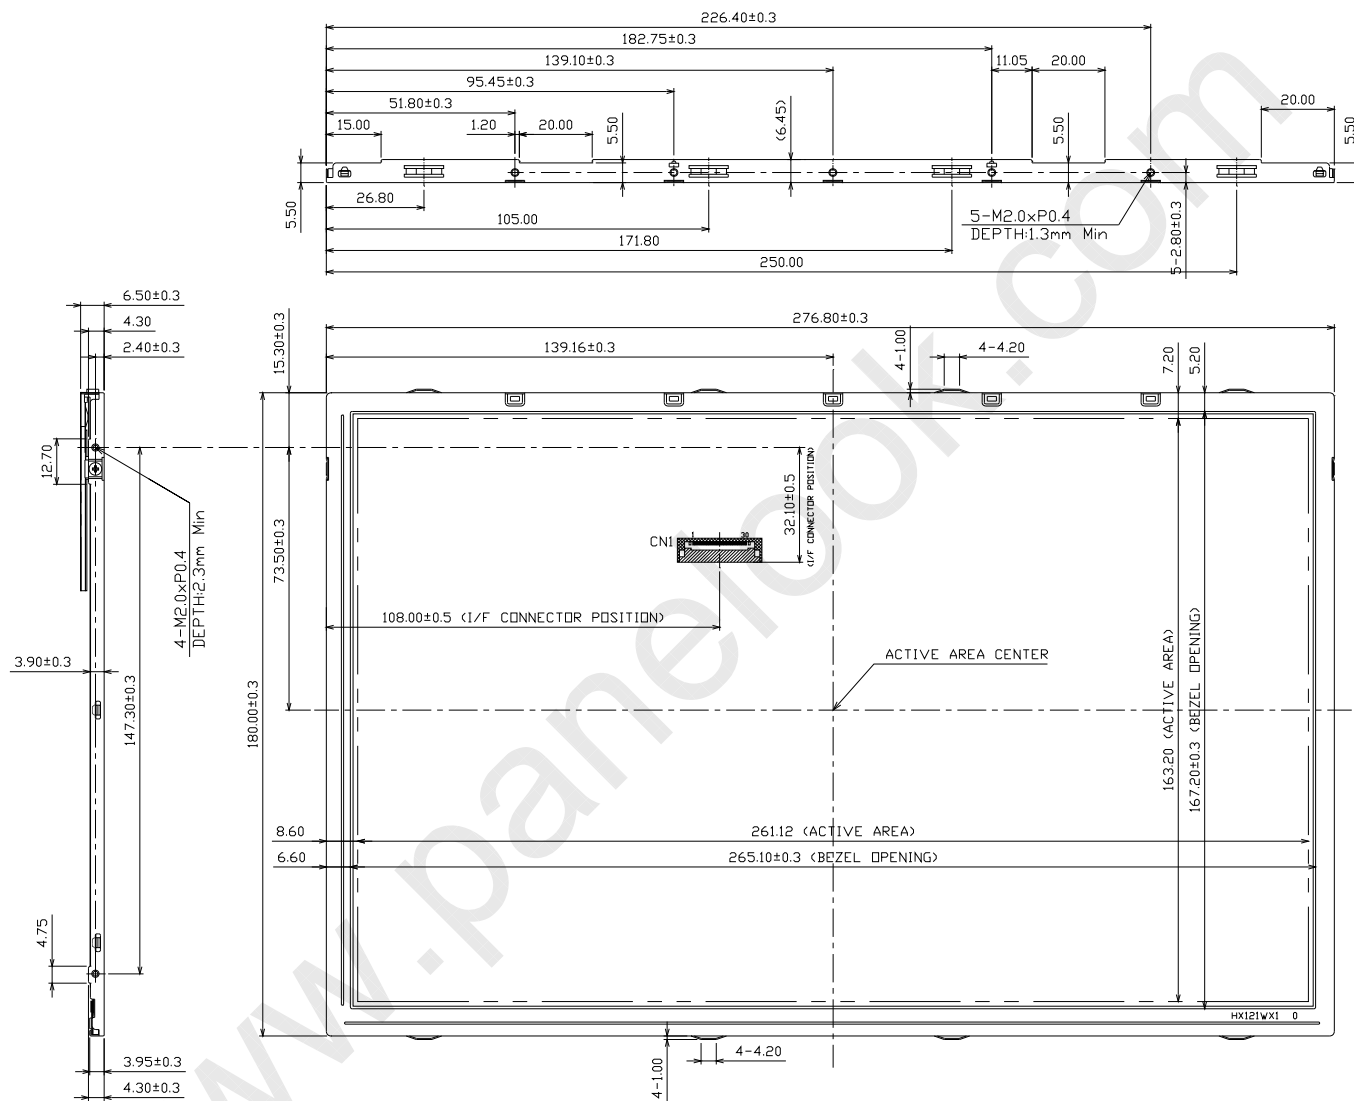

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
21 OF 32




PRODUCT GROUP
TFT LCD PRODUCT

REV
0

ISSUE DATE
2010.12.15

Figure 7. TFT-LCD Module Outline Dimensions (Rear view)

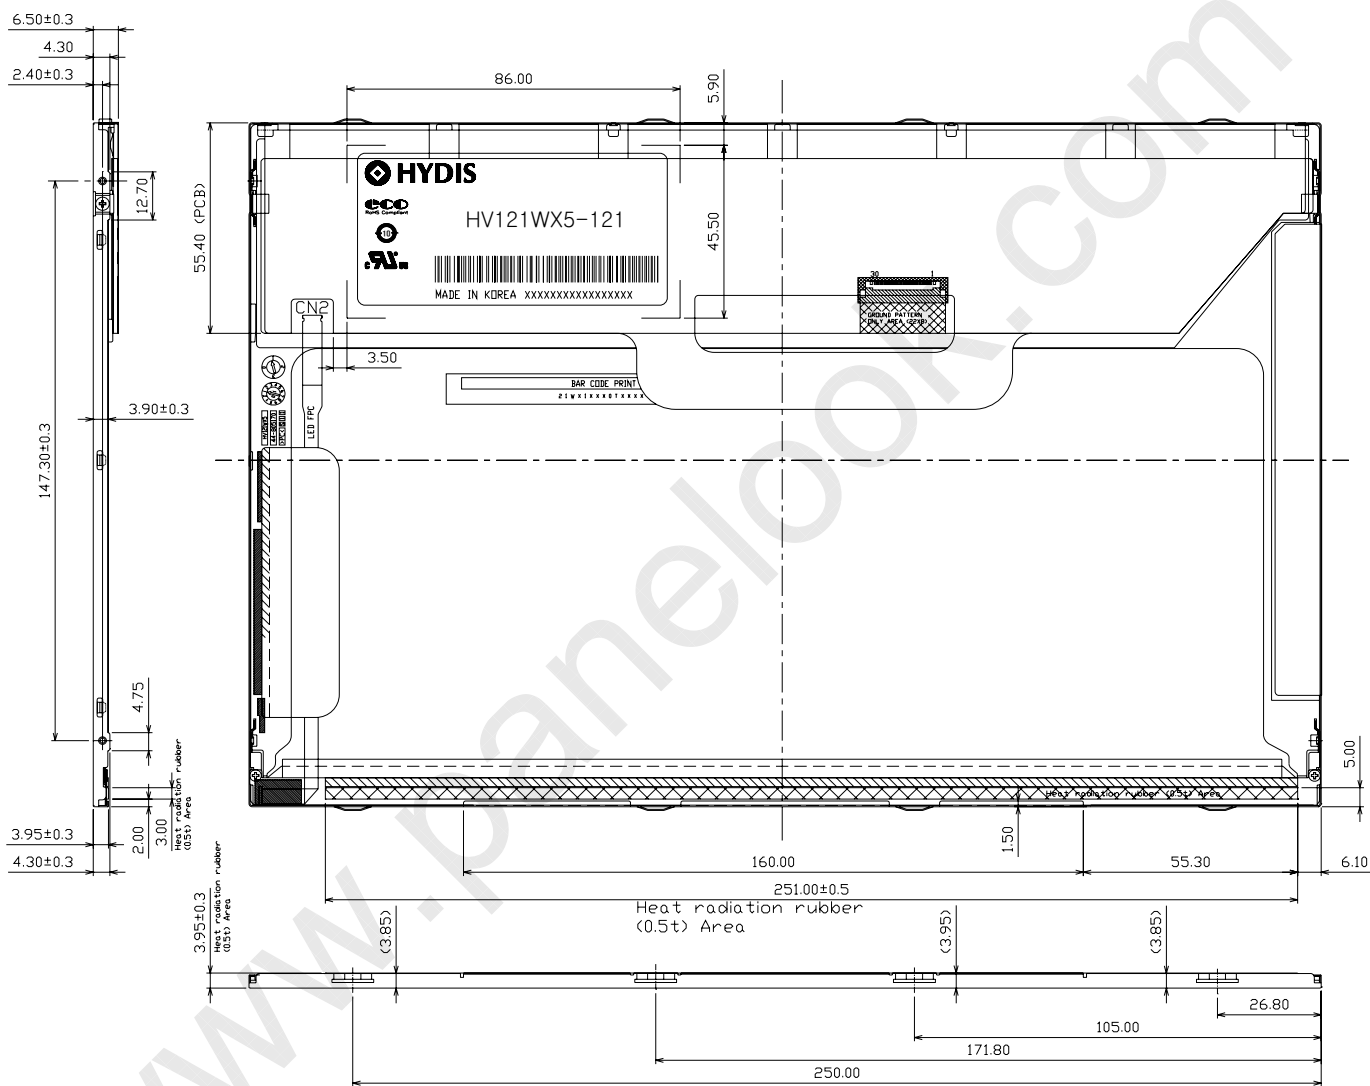

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
22 OF 32

**HYDIS****PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

10.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 12. Reliability Test>

No	Test Item	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C, 80%RH, 240hrs
4	High temperature operation test	Ta = 50 °C, 240 hrs
5	Low temperature operation test	Ta = 0 °C, 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (30 min), 100 cycle
7	Vibration test (non-operating)	Frequency : 10~500Hz Gravity/AMP : 1.5G Period : X,Y,Z 30min
8	Shock test (non-operating)	Gravity : 220G Pulse width : 2ms, half sine wave ±X, ±Y, ±Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150pF, 330ohm, 15KV Contact : 150pF, 330ohm, 8KV

11.0 HANDLING & CAUTIONS**11.1 Cautions when taking out the module**

- Pick the pouch only, when taking out module from a shipping package.

11.2 Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass (epoxy) material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

SPEC. NUMBER

S864-1428

SPEC TITLE

HV121WX5-121 Product Specification

PAGE

23 OF 32

B2005-C001-D (3/3)

A4(210 X 297)

 HYDIS	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

11.3 Cautions for the operation

- When the module is operating, do not lose MCLK, DE signals. If any one of these signals were lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

11.4 Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

11.5 Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

11.6 Cautions for the digitizer assembly

- When assembling FPC connector, do not flip connector past 90° due to possible damage to connector.
- When positioning digitizer underneath driver IC, do not lift driver IC past 90° due to possible damage to drive IC pattern.
- Please be warned that during assembly of digitizer, the opening or closing of FPC will result in possible electrostatic discharge damage to the LED

11.7 Other cautions


- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 24 OF 32
B2005-C001-D (3/3)		A4(210 X 297)


 HYDIS	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

12.0 LABELS

12.1 Product Label

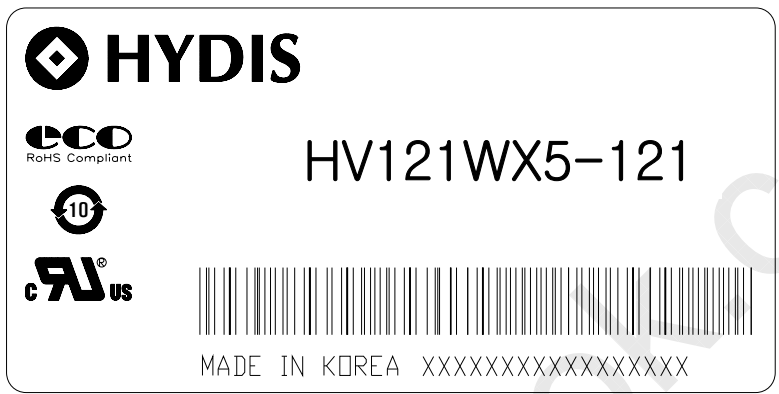

HYDIS Barcode

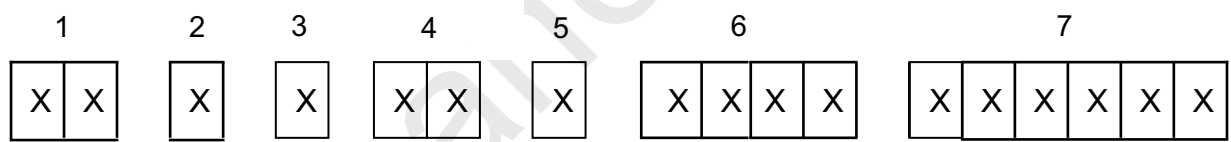

- | | |
|--|--|
| <p>No 1. Control Number</p> <p>No 2. Rank / Grade</p> <p>No 3. Line Classification
(HYDIS : H)</p> <p>No 4. Year (5 : 2005, 6 : 2006, ...)</p> | <p>No 5. Month (1, 2, 3,..., 9, X, Y, Z)</p> <p>No 6. FG Code</p> <p>No 7. Serial Number</p> |
|--|--|

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 25 OF 32
----------------------------------	---	-------------------------



	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

12.2 Packing Label

Label Size: 108 mm (L) × 56 mm (W)

Contents


Model: HV121WX5-121

Q`ty: Module Q`ty in one box

Serial No.: Box Serial No. See next figure for detail description.

Date: Packing Date

FG Code: FG Code of Product

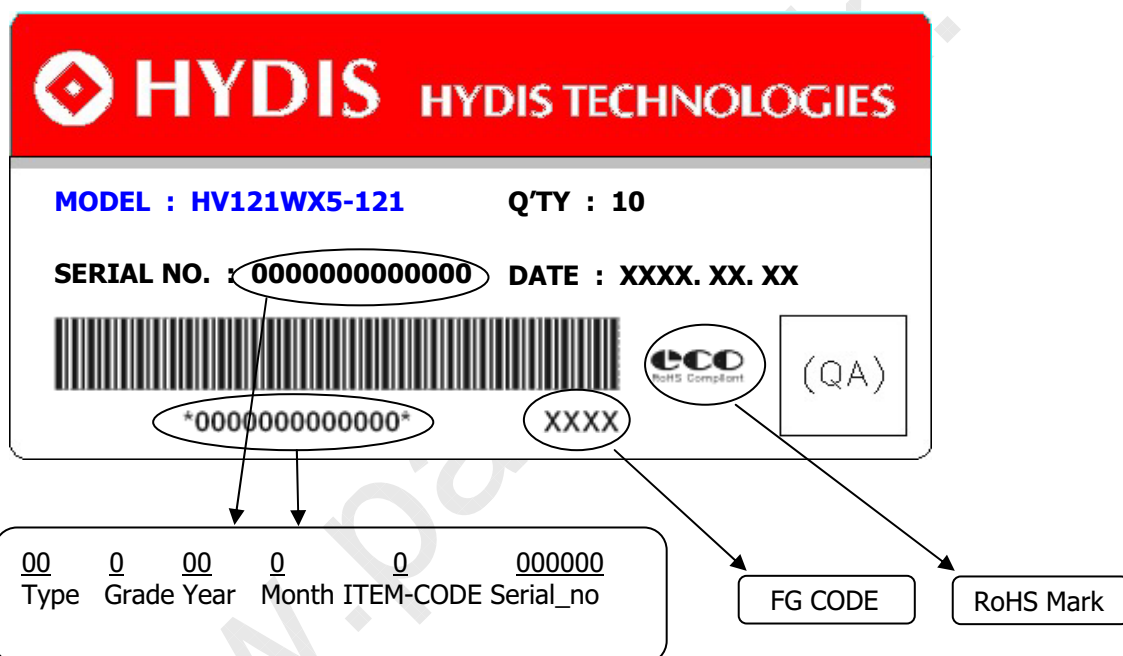

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 26 OF 32
---------------------------	--	------------------



HYDIS

PRODUCT GROUP

REV

ISSUE DATE

TFT LCD PRODUCT


0

2010.12.15


13.0 PACKING INFORMATION

13.1 Packing order


Put Pad into the box.

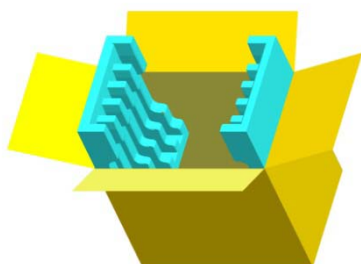


Put silica gels in the box.



After sealing the box, attach Packing Label on the attach position sign area of the box.



Place a cover on the top of the box.

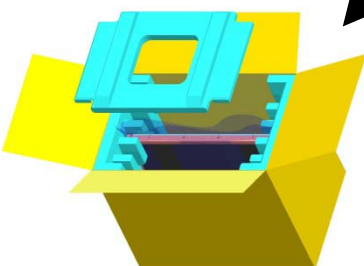

As shown in the figure, place the Modules bundled by shielding bag in the box.



13.2 Notes

- Box Dimension : 349.0mm(W) X 261.0mm(D) X 311.0mm(H)
- Package Quantity in one Box : 10pcs

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
27 OF 32

B2005-C001-D (3/3)

A4(210 X 297)



PRODUCT GROUP

REV



ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

13.2 Pallet Packing

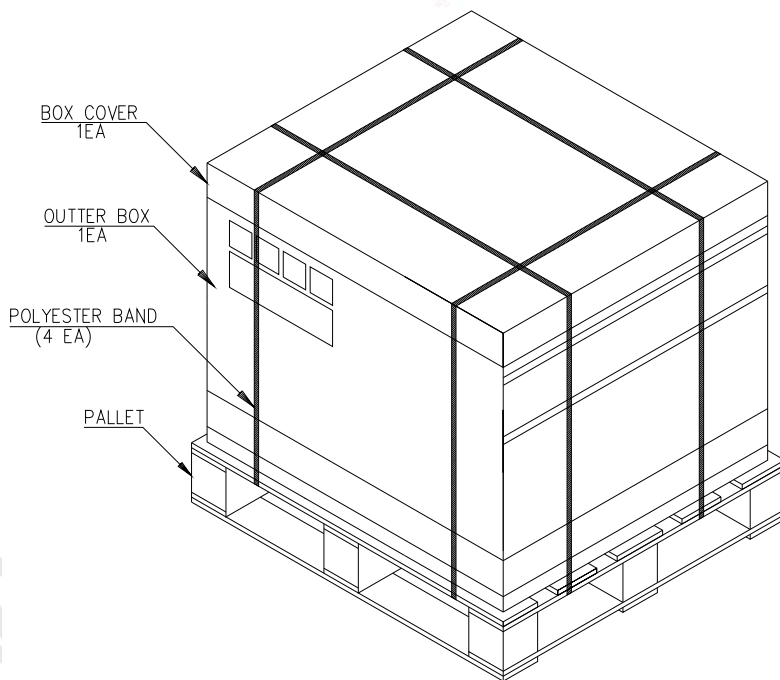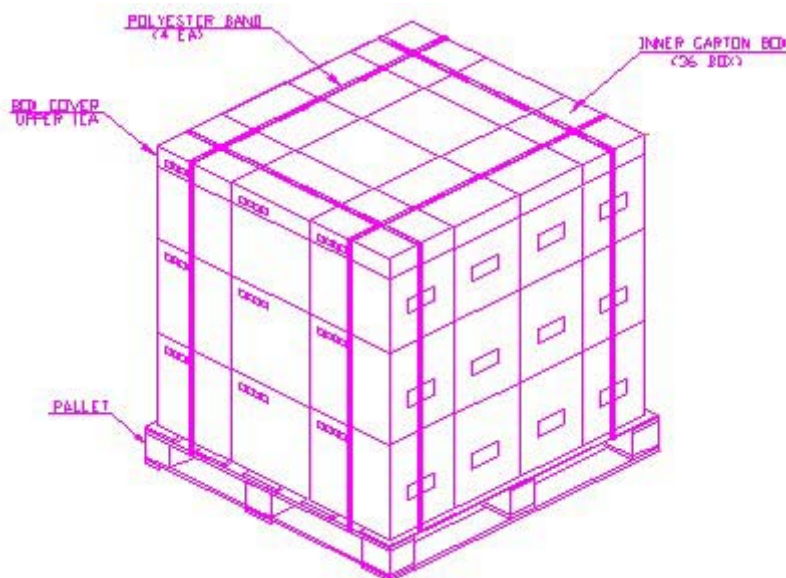

* Note

- Pallet Dimension : : 1100 mm (L) × 1100 mm (W) × 120 mm (H)
- Package Quantity in one Box : 10pcs
- Box Quantity in one Pallet : 36 box

SPEC. NUMBER
S864-1428

SPEC TITLE
HV121WX5-121 Product Specification

PAGE
28 OF 32

	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

14.0 EDID Table

Address (HEX)	Function	Hex	Dec	values.	Notes
00	Header	00	0	0	EDID Header
01		FF	255	255	
02		FF	255	255	
03		FF	255	255	
04		FF	255	255	
05		FF	255	255	
06		FF	255	255	
07		00	0	0	
08	ID Manufacturer Name	09	9	BOE	ID = BOE
09		E5	229		
0A	ID Product Code	A0	160	2208	CODE = 2208
0B		08	8		
0C	32-bit serial No.	00	0		
0D		00	0		
0E		00	0		
0F		00	0		
10	Week of manufacture	0	0	0	
11	Year of Manufacture	13	19	2009	Manufactured in 2009
12	EDID Structure Ver.	01	1	1	EDID Ver 1.0
13	EDID revision #	04	4	4	EDID Rev. 0.4
14	Video input definition	95	149	-	
15	Max H image size	1A	26	26	26 cm (Approx)
16	Max V image size	10	16	16	16 cm (Approx)
17	Display Gamma	78	120	2.2	Gamma curve = 2.2
18	Feature support	2A	42		RGB display, Preferred Timming mode
19	Red/Green low bits	92	146	-	Red / Green Low Bits
1A	Blue/White low bits	75	117	-	Blue / White Low Bits
1B	Red x high bits	90	144	0.564	Rx = 0.56416
1C	Red y high bits	59	89	0.349	Ry = 0.3491
1D	Green x high bits	5A	90	0.352	Gx = 0.35152
1E	Green y high bits	90	144	0.565	Gy = 0.5648
1F	Blue x high bits	26	38	0.150	Bx = 0.14956
20	Blue y high bits	1D	29	0.117	By = 0.1166
21	White x high bits	50	80	0.313	Wx = 0.313
22	White y high bits	54	84	0.329	Wy = 0.329

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 29 OF 32
B2005-C001-D (3/3)		A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	TFT LCD PRODUCT	0	2010.12.15

Address (HEX)	Function	Hex	Dec	values.	Notes
23	Established timing 1	00	0	-	
24	Established timing 2	00	0	-	
25	Established timing 3	00	0	-	
26	Standard timing #1	01	1		Not Used
27		01	1		
28	Standard timing #2	01	1		Not Used
29		01	1		
2A	Standard timing #3	01	1		Not Used
2B		01	1		
2C	Standard timing #4	01	1		Not Used
2D		01	1		
2E	Standard timing #5	01	1		Not Used
2F		01	1		
30	Standard timing #6	01	1		Not Used
31		01	1		
32	Standard timing #7	01	1		Not Used
33		01	1		
34	Standard timing #8	01	1		Not Used
35		01	1		
36	Detailed timing/monitor descriptor #1 (60Hz)	12	18	69.3000	69.3MHz Main clock
37		1B	27		
38		00	0	1280	Hor Active = 1280
39		8A	138	138	Hor Blanking = 138
3A		50	80	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		20	32	800	Ver Active = 800
3C		0E	14	14	Ver Blanking = 14
3D		30	48	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		1A	26	26	Hor Sync Offset = 26
3F		16	22	22	H Sync Pulse Width = 22
40		22	34	2	V sync Offset = 2 line
41		00	0	2	V Sync Pulse width : 2 line
42		05	5	261	Horizontal Image Size = 261 mm (Low 8 bits)
43		A3	163	163	Vertical Image Size = 163 mm (Low 8 bits)
44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0	0	Hor Border (pixels)
46		00	0	0	Vertical Border (Lines)
47	19	25	-		

SPEC. NUMBER S864-1428	SPEC TITLE HV121WX5-121 Product Specification	PAGE 30 OF 32
B2005-C001-D (3/3)		A4(210 X 297)

**HYDIS****PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

Address (HEX)	Function	Hex	Dec	values.	Notes
48	Detailed timing/monitor descriptor #2	0C	12	46.2000	47.33MHz Main clock
49		12	18		
4A		0	0	1280	Hor Active = 1280
4B		8A	138	138	Hor Blanking = 160
4C		50	80	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		20	32	800	Ver Active = 768
4E		0E	14	14	Ver Blanking = 23
4F		30	48	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
50		1A	26	26	Hor Sync Offset = 48
51		16	22	22	H Sync Pulse Width = 32
52		22	34	2	V sync Offset = 3 line
53		00	0	2	V Sync Pulse width = 6 line
54		05	5	261	Horizontal Image Size = 261 mm (Low 8 bits)
55		A3	163	163	Vertical Image Size = 163 mm (Low 8 bits)
56		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0	0	Hor Border (pixels)
58		00	0	0	Vertical Border (Lines)
59		19	25	-	Refer to right table
5A		Detailed timing/monitor descriptor #3	00	0	0
5B	00		0	0	
5C	00		0	0	
5D	00		0	0	
5E	00		0	0	
5F	00		0	0	
60	00		0	0	
61	00		0	0	
62	00		0	0	
63	00		0	0	
64	00		0	0	
65	00		0	0	
66	00		0	0	mini-LVDS
67	00		0	0	
68	00	0	0		
69	00	0	0		
6A	00	0	0		
6B	00	0	0		

SPEC. NUMBER

S864-1428

SPEC TITLE

HV121WX5-121 Product Specification

PAGE

31 OF 32

B2005-C001-D (3/3)

A4(210 X 297)

**HYDIS****PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

0

2010.12.15

Address (HEX)	Function	Hex	Dec	values.	Notes
6C	Detailed timing/monitor descriptor #4	00	0	0	Detailed Timing Description #4
6D		00	0	0	Flag
6E		00	0	0	Reserved
6F		02	2	2	For Brightness Table and Power consumption
70		00	0	0	Flag
71		19	25	10	PWM 10% @ Step 0
72		3D	61	24	PWM 24% @ Step 5
73		E5	229	90	PWM 90% @ Step 10
74		16	22	22	22 Nits @ Step 0
75		3C	60	60	60 Nits @ Step 5
76		6E	110	220	220 Nits @ Step 10
77		1F	31	1240	Panel Electronics Power @32x32 Chess Pattern
78		14	20	800	Backlight Power @60 nits
79		22	34	2740	Backlight Power @Step 10
7A		6E	110	220	Nits @ 100% PWM Duty
7B		00	0	0	Flags
7C		00	0	0	Flags
7D	00	0	0	Flags	
7E	Extension flag	00	0	0	
7F	Checksum	65	101	-	

SPEC. NUMBER
S864-1428SPEC TITLE
HV121WX5-121 Product SpecificationPAGE
32 OF 32

B2005-C001-D (3/3)

A4(210 X 297)