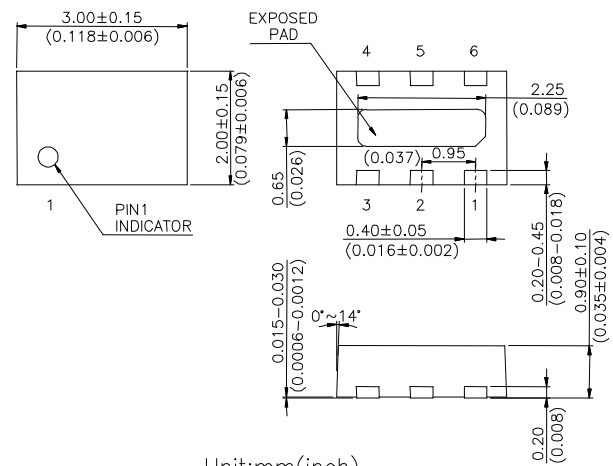


**Features**

- **Low Insertion Loss** : 0.50 dB @ 2.7 GHz  
0.60 dB @ 3.9 GHz
- **Isolation**: 25.0 dB @ 2.7 GHz  
25.0 dB @ 3.9 GHz
- **Low DC Power Consumption**
- **Miniature SON6L (2x3 mm) Plastic Lead (Pb) Free Package, RoHS Compliant**
- **PHEMT process**

**Description**

The HWS466 is a GaAs PHEMT MMIC SPDT switch operating at DC-6 GHz in a low cost miniature SON6L (2 x 3 mm) plastic lead (Pb) free package. The HWS466 features low insertion loss and high linearity with very low DC power consumption. This switch can be used in WiMAX or IEEE 802.11a/b/g WLAN PC card and access point applications as transmit/receive switch, antenna diversity switch, or band-selection switch.

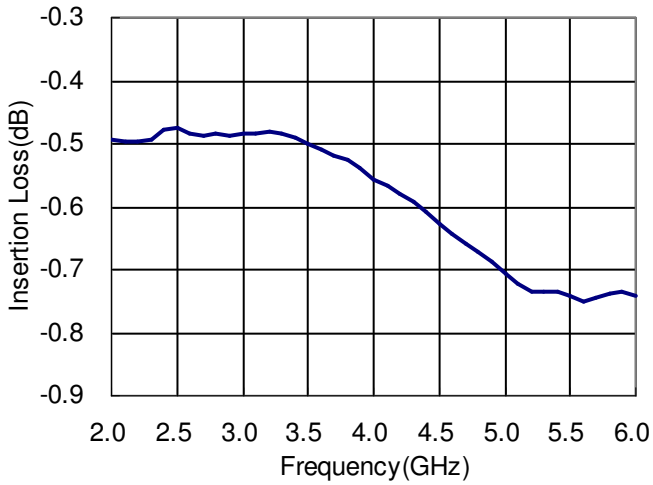
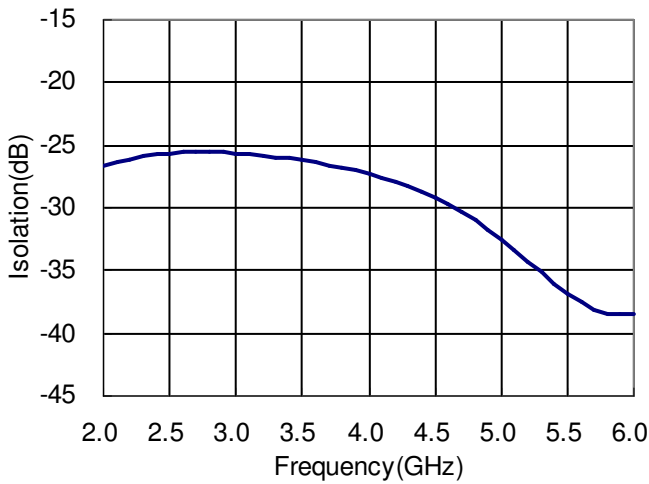
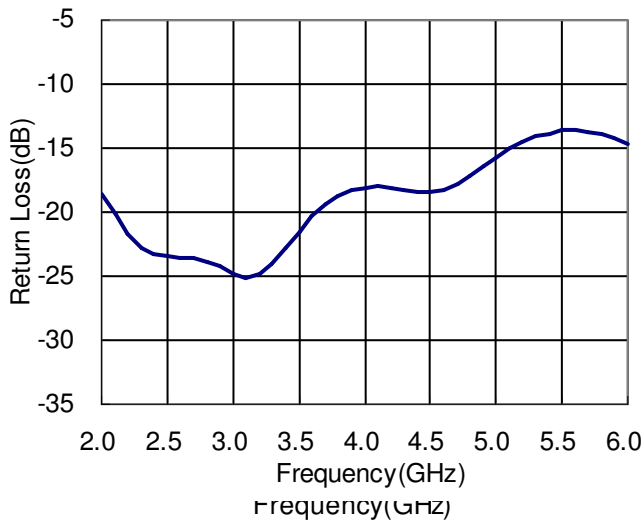
**SON6L (2 x 3 mm)**


Unit:mm(inch)

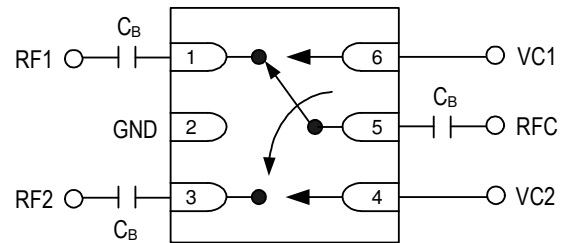
**Electrical Specifications at 25°C with 0, +3V Control Voltages**

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Insertion Loss	0.10-6.00 GHz		0.75		dB
	2.30-2.70 GHz		0.50	0.70	dB
	3.30-3.90 GHz		0.60	0.90	dB
	5.15-5.88 GHz		0.75	1.10	dB
Isolation	0.10-6.00 GHz		25.0		dB
	2.30-2.70 GHz	20.0	25.0		dB
	3.30-3.90 GHz	20.0	25.0		dB
	5.15-5.88 GHz	22.0	27.5		dB
Return Loss	0.10-6.00 GHz		12		dB
Input Power for One dB Compression	2.00-6.00 GHz @+3V @+5V		36		dBm
			38		dBm
Second and Third Harmonics	Pin=20 dBm		-75		dBc
Input Third Order Intermodulation Intercept Point	25 dBm Per Tone, 3.80 GHz @+3V @+5V		57		dBm
			60		dBm
Switching Time			50		nsec
Control Current	@+3V		5	100	uA

Note: All measurements made in a 50 ohm system with 0/+3.0V control voltages, unless otherwise specified.

**Typical Performance Data with 8pF Capacitors @ +25°C**
**Insertion Loss vs Frequency**

**Isolation vs Frequency**

**Return Loss vs Frequency**

**Absolute Maximum Ratings**

Parameter	Absolute Maximum
RF Input Power	+36 dBm @ +3V
Control Voltage	+6V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

**Pin Out (Top View)**

**Note:**

1. DC blocking capacitors  $C_B=8\text{pF}$  are required on all RF ports.
2. Exposed pad in the bottom must be connected to ground by via holes.

**Logic Table for Switch On-Path**

VC1	VC2	RFC-RF1	RFC-RF2
1	0	On	Off
0	1	Off	On

'1' = +2.7V to +5V

'0' = 0V to +0.2V