


## AUDIO FREQUENCY AMPLIFIER APPLICATIONS.

## FEATURES:

- Complementary to 2SA1144.
- Small Collector Output Capacitance :  $C_{ob}=1.8\text{pF}(\text{Typ.})$
- High Transition Frequency :  $f_T=200\text{MHz}(\text{Typ.})$

MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	150	V
Collector-Emitter Voltage	$V_{CEO}$	150	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	50	mA
Base Current	$I_B$	5	mA
Collector Power Dissipation ( $T_c=25^\circ\text{C}$ )	$P_C$	10	W
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55~150	$^\circ\text{C}$

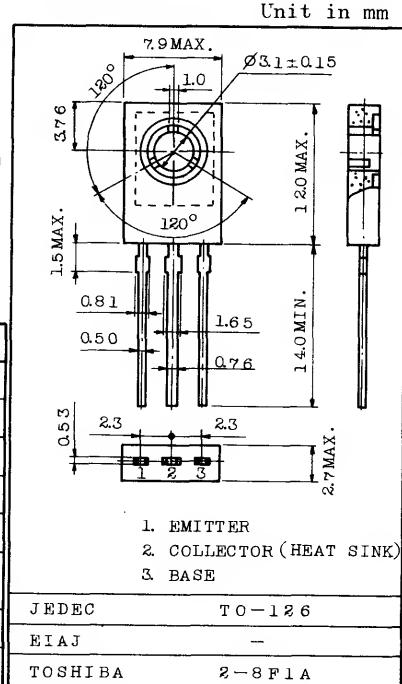

Mounting Kit No. AC46C  
Weight : 0.72g

ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=150\text{V}$ , $I_E=0$	-	-	0.1	$\mu\text{A}$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5\text{V}$ , $I_C=0$	-	-	0.1	$\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1\text{mA}$ , $I_B=0$	150	-	-	V
DC Current Gain	$h_{FE}$ (Note)	$V_{CE}=5\text{V}$ , $I_C=10\text{mA}$	80	-	240	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=10\text{mA}$ , $I_B=1\text{mA}$	-	-	1.0	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=5\text{V}$ , $I_C=10\text{mA}$	-	-	0.8	V
Transition Frequency	$f_T$	$V_{CE}=10\text{V}$ , $I_C=10\text{mA}$	-	200	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10\text{V}$ , $I_E=0$ , $f=1\text{MHz}$	-	1.8	-	pF

Note:  $h_{FE}$  Classification. O:80~160, Y:120~240

