



# 3.3V CMOS 12-BIT UNIVERSAL BUS DRIVER WITH PARITY CHECKER, DUAL 3-STATE OUTPUTS AND BUS-HOLD

## IDT74ALVCH16903

### FEATURES:

- 0.5 MICRON CMOS Technology
- Typical  $t_{sk(o)}$  (Output Skew) < 250ps
- ESD > 2000V per MIL-STD-883, Method 3015; > 200V using machine model (C = 200pF, R = 0)
- $V_{cc} = 3.3V \pm 0.3V$ , Normal Range
- $V_{cc} = 2.7V$  to  $3.6V$ , Extended Range
- $V_{cc} = 2.5V \pm 0.2V$
- CMOS power levels (0.4 $\mu$  W typ. static)
- Rail-to-Rail output swing for increased noise margin
- Available in SSOP and TSSOP packages

### DRIVE FEATURES:

- High Output Drivers:  $\pm 24mA$
- Suitable for heavy loads

### ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol               | Description   | Max                  | Unit |
|----------------------|---|----------------------|------|
| $V_{TERM}^{(2)}$     | Terminal Voltage with Respect to GND                  | -0.5 to +4.6         | V    |
| $V_{TERM}^{(3)}$     | Terminal Voltage with Respect to GND (Outputs Only)   | -0.5 to $V_{cc}+0.5$ | V    |
| TSTG                 | Storage Temperature                                   | -65 to +150          | °C   |
| $I_{OUT}$            | DC Output Current                                     | -50 to +50           | mA   |
| $I_{IK}$             | Continuous Clamp Current, $V_I < 0$ or $V_I > V_{cc}$ | $\pm 50$             | mA   |
| $I_{OK}$             | Continuous Clamp Current, $V_O < 0$                   | -50                  | mA   |
| $I_{CC}$<br>$I_{SS}$ | Continuous Current through each $V_{cc}$ or GND       | $\pm 100$            | mA   |

#### NOTES:

1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

2.  $V_{cc}$  terminals.

3. This value is limited to 4.6V maximum.

### CAPACITANCE ( $T_A = +25^\circ C$ , $F = 1.0MHz$ )

| Symbol    | Parameter <sup>(1)</sup> | Conditions     | Typ. | Max. | Unit |
|-----------|--------------------------|----------------|------|------|------|
| $C_{IN}$  | Input Capacitance        | $V_{IN} = 0V$  | 5    | 7    | pF   |
| $C_{OUT}$ | Output Capacitance       | $V_{OUT} = 0V$ | 7    | 9    | pF   |
| $C_{OUT}$ | I/O Port Capacitance     | $V_{IN} = 0V$  | 7    | 9    | pF   |

#### NOTE:

1. As applicable to the device type.

### DESCRIPTION:

This 12-bit universal bus driver is built using advanced dual metal CMOS technology. This device has dual outputs and can operate as a buffer or an edge-triggered register. In both modes, parity is checked on APAR, which arrives one cycle after the data to which it applies. The  $\overline{YERR}$  output, which is produced one cycle after APAR, is open drain.

MODE selects one of the two data paths. When MODE is low, the device operates as an edge-triggered register. On the positive transition of the clock (CLK) input and when the clock-enable ( $\overline{CLKEN}$ ) input is low, data setup at the A inputs is stored in the internal registers. On the positive transition of CLK and when  $\overline{CLKEN}$  is high, only data setup at the 9A-12A inputs is stored in their internal registers. When MODE is high, the device operates as a buffer and data at the A inputs passes directly to the outputs. The 11A/ $\overline{YERREN}$  serves a dual purpose; it acts as a normal data bit and also enables  $\overline{YERR}$  data to be clocked into the  $\overline{YERR}$  output register.

When used as a single device, parity output enable ( $\overline{PAROE}$ ) must be tied high; when parity input/output (PARI/O) is low, even parity is selected and when PARI/O is high, odd parity is selected. When used in pairs and  $\overline{PAROE}$  is low, the parity sum is output on PARI/O for cascading to the second ALVCH16903. When used in pairs and  $\overline{PAROE}$  is high, PARI/O accepts a partial parity sum from the first ALVCH16903.

A buffered output-enable ( $\overline{OE}$ ) input can be used to place the 24 outputs and  $\overline{YERR}$  in either a normal logic state (high or low logic levels) or a high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without need for interface or pullup components.


The ALVCH16903 has been designed with a  $\pm 24mA$  output driver. This driver is capable of driving a moderate to heavy load while maintaining speed performance.

The ALVCH16903 has "bus-hold" which retains the inputs' last state whenever the input bus goes to a high-impedance. This prevents floating inputs and eliminates the need for pull-up/down resistors.

### APPLICATIONS:

- 3.3V high speed systems
- 3.3V and lower voltage computing systems

### FUNCTIONAL BLOCK DIAGRAM

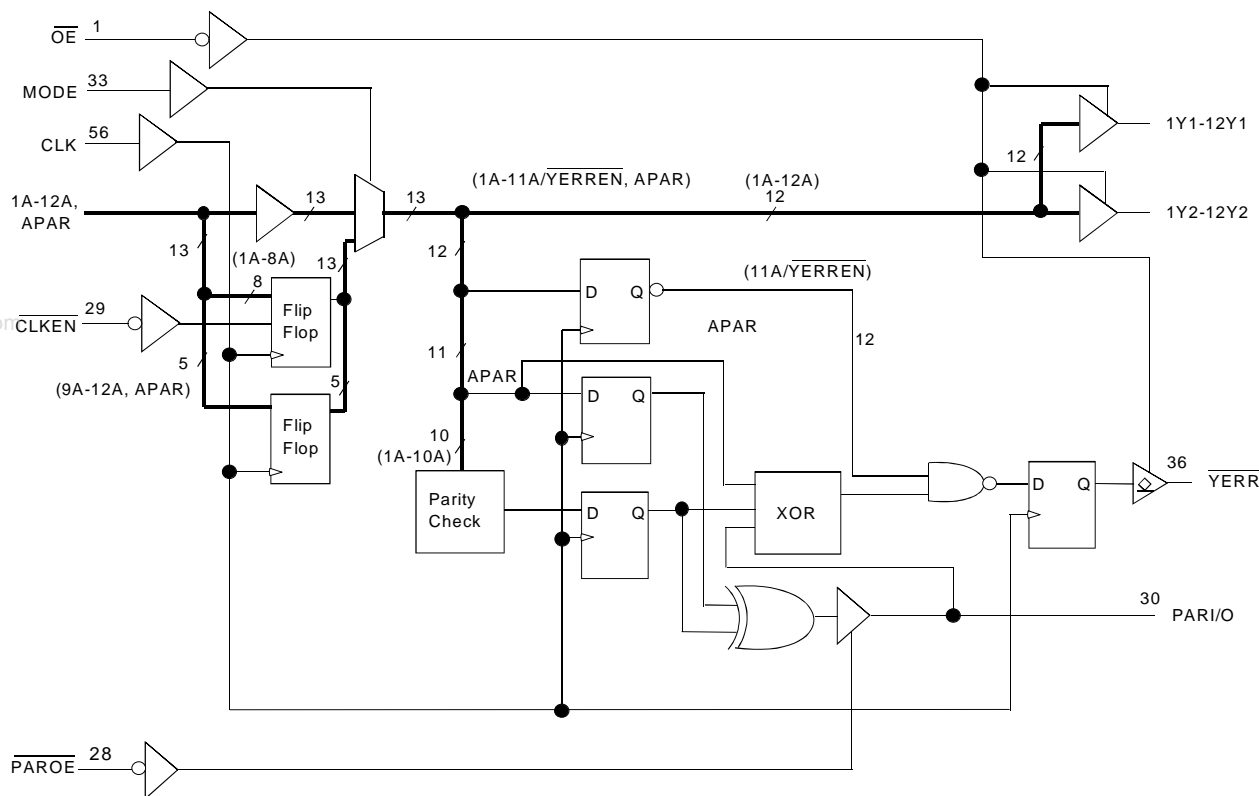

FUNCTION TABLE<sup>(1)</sup>

| Inputs |      |       |     | Outputs |                  |          |
|--------|------|-------|-----|---------|------------------|----------|
| OE     | MODE | CLKEN | CLK | A       | 1Yx-8Yx          | 9Yx-12Yx |
| L      | L    | L     | ↑   | H       | H                | H        |
| L      | L    | L     | ↑   | L       | L                | L        |
| L      | L    | H     | ↑   | H       | Y <sup>(2)</sup> | H        |
| L      | L    | H     | ↑   | L       | Y <sup>(2)</sup> | L        |
| L      | H    | X     | X   | H       | H                | H        |
| L      | H    | X     | X   | L       | L                | L        |
| H      | X    | X     | X   | X       | Z                | Z        |

**NOTES:**

1. H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care  
↑ = LOW-to-HIGH Transition
2. Output level before the indicated steady-state conditions were established.


PARITY FUNCTION TABLE<sup>(1)</sup>

| Inputs |                      |                               |        |                         | Output |      |
|--------|----------------------|-------------------------------|--------|-------------------------|--------|------|
| OE     | PAROE <sup>(2)</sup> | 11A/<br>YERREN <sup>(3)</sup> | PARI/O | Σ OF INPUTS<br>1A-10A=H | APAR   | YERR |
| L      | H                    | L                             | L      | 0, 2, 4, 6, 8, 10       | L      | H    |
| L      | H                    | L                             | L      | 1, 3, 5, 7, 9           | L      | L    |
| L      | H                    | L                             | L      | 0, 2, 4, 6, 8, 10       | H      | L    |
| L      | H                    | L                             | L      | 1, 3, 5, 7, 9           | H      | H    |
| L      | H                    | L                             | H      | 0, 2, 4, 6, 8, 10       | L      | L    |
| L      | H                    | L                             | H      | 1, 3, 5, 7, 9           | L      | H    |
| L      | H                    | L                             | H      | 0, 2, 4, 6, 8, 10       | H      | H    |
| L      | H                    | L                             | H      | 1, 3, 5, 7, 9           | H      | L    |
| H      | X                    | X                             | X      | X                       | X      | H    |
| L      | X                    | H                             | X      | X                       | X      | H    |

**NOTES:**

1. H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care
2. When used as a single device, PAROE must be tied HIGH.
3. Valid after appropriate number of clock pulses have set internal register.

PIN CONFIGURATION

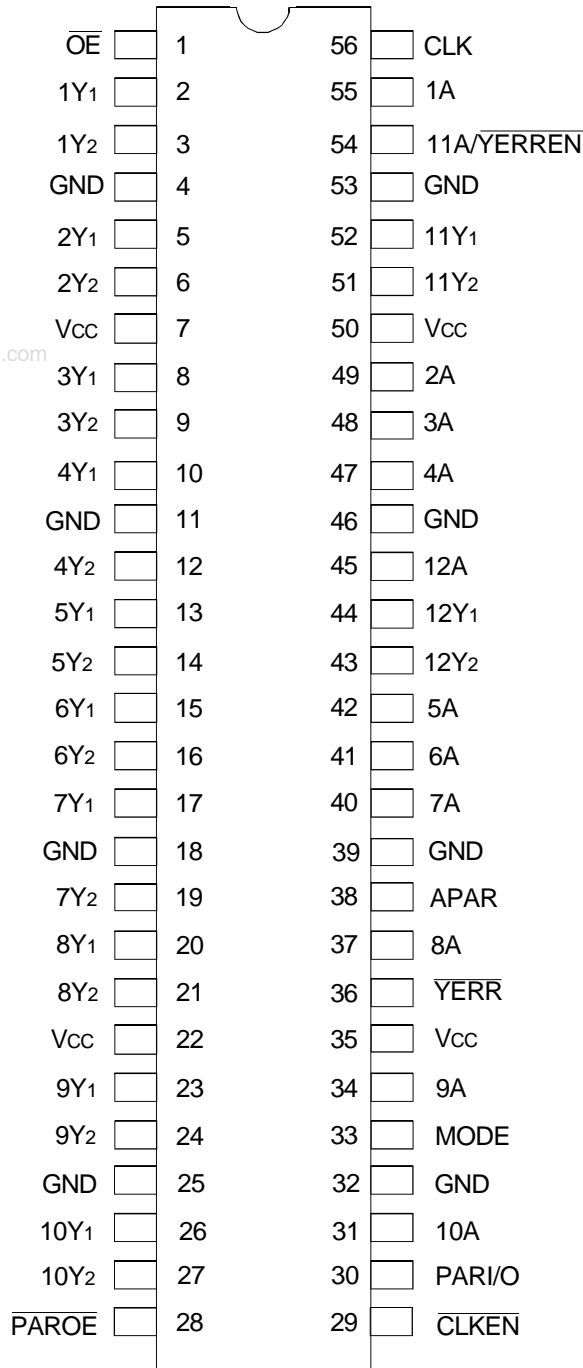

SSOP/ TSSOP  
TOP VIEW

PARI/O FUNCTION TABLE<sup>(1)</sup>

| Inputs |                                  |      | Output |
|--------|----------------------------------|------|--------|
| PAROE  | $\Sigma$ OF INPUTS<br>1A-10A = H | APAR | PARI/O |
| L      | 0, 2, 4, 6, 8, 10                | L    | L      |
| L      | 1, 3, 5, 7, 9                    | L    | H      |
| L      | 0, 2, 4, 6, 8, 10                | H    | H      |
| L      | 1, 3, 5, 7, 9                    | H    | L      |
| H      | X                                | X    | Z      |

NOTE:

1. This table applies to the first device of a cascaded pair of ALVCH16903 devices.

PIN DESCRIPTION

| Pin Names | I/O | Description                             |
|-----------|-----|---|
| 1A-12A    | I   | Data Inputs <sup>(1)</sup>              |
| 1Y1-12Y2  | O   | 3-State Data Outputs                    |
| CLK       | I   | Clock Input                             |
| CLKEN     | I   | Clock Enable Input (Active LOW)         |
| MODE      | I   | Select Pin                              |
| YERREN    | I   | Error Signal Output Enable (Active LOW) |
| PAROE     | I   | Parity Output Enable (Active LOW)       |
| PARI/O    | I/O | Parity Input/Output                     |
| YERR      | O   | Error Signal (Open Drain)               |
| OE        | I   | Output Enable Input (Active LOW)        |
| APAR      | I   | Parity Input                            |

NOTE:

1. These pins have "Bus-Hold". All other pins are standard inputs, outputs, or I/Os.

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Operating Condition:  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

| Symbol   | Parameter  | Test Conditions   |   | Min. | Typ. <sup>(1)</sup> | Max. | Unit |
|--|--|---|---|------|---------------------|------|------|
| V <sub>IH</sub>  | Input HIGH Voltage Level                               | V <sub>CC</sub> = 2.3V to 2.7V  |   | 1.7  | —                   | —    | V    |
|  |  | V <sub>CC</sub> = 2.7V to 3.6V  |   | 2    | —                   | —    |      |
| V <sub>IL</sub>  | Input LOW Voltage Level                                | V <sub>CC</sub> = 2.3V to 2.7V  |   | —    | —                   | 0.7  | V    |
|  |  | V <sub>CC</sub> = 2.7V to 3.6V  |   | —    | —                   | 0.8  |      |
| I <sub>IH</sub>  | Input HIGH Current                                     | V <sub>CC</sub> = 3.6V  | V <sub>I</sub> = V <sub>CC</sub>        | —    | —                   | ± 5  | μA   |
| I <sub>IL</sub>  | Input LOW Current                                      | V <sub>CC</sub> = 3.6V  | V <sub>I</sub> = GND                    | —    | —                   | ± 5  |      |
| I <sub>OZH</sub><br>I <sub>OZL</sub>                     | High Impedance Output Current<br>(3-State Output pins) | V <sub>CC</sub> = 3.6V  |   | —    | —                   | ± 10 | μA   |
|  |  |   |   | —    | —                   | ± 10 |      |
| I <sub>OH</sub>  | YERR Output  | V <sub>CC</sub> = 0V to 3.6V  | V <sub>O</sub> = V <sub>CC</sub>        | —    | —                   | ± 10 | μA   |
| I <sub>OZ</sub> <sup>(2)</sup>                           | High Impedance Output Current                          | V <sub>CC</sub> = 3.6V  | V <sub>O</sub> = V <sub>CC</sub> or GND | —    | —                   | ± 10 | μA   |
| V <sub>IK</sub>  | Clamp Diode Voltage                                    | V <sub>CC</sub> = 2.3V, I <sub>IN</sub> = - 18mA                            |   | —    | -0.7                | -1.2 | V    |
| V <sub>H</sub>   | Input Hysteresis                                       | V <sub>CC</sub> = 3.3V  |   | —    | 100                 | —    | mV   |
| I <sub>CC1</sub><br>I <sub>CC2</sub><br>I <sub>CC3</sub> | Quiescent Power Supply Current                         | V <sub>CC</sub> = 3.6V, V <sub>IN</sub> = GND or V <sub>CC</sub>            |   | —    | 0.1                 | 40   | μA   |
| ΔI <sub>CC</sub>   | Quiescent Power Supply Current Variation               | One input at V <sub>CC</sub> - 0.6V, other inputs at V <sub>CC</sub> or GND |   | —    | —                   | 750  | μA   |
| C <sub>i</sub>   | Control Inputs   | V <sub>CC</sub> = 3.3V  | V <sub>I</sub> = V <sub>CC</sub> or GND | —    | 5.5                 | —    | pF   |
|  | Data Inputs  |   |   | —    | 5.5                 | —    |      |
| C <sub>o</sub>   | YERR Output  | V <sub>CC</sub> = 3.3V  | V <sub>O</sub> = V <sub>CC</sub> or GND | —    | 5                   | —    | pF   |
|  | Data Outputs   |   |   | —    | 6                   | —    |      |
| C <sub>IO</sub>  | PARI/O   | V <sub>CC</sub> = 3.3V  | V <sub>O</sub> = V <sub>CC</sub> or GND | —    | 7                   | —    | pF   |

### NOTES:

1. Typical values are at V<sub>CC</sub> = 3.3V, +25°C ambient.
2. For I/O ports, the parameter I<sub>OZ</sub> includes the input leakage current.

## BUS-HOLD CHARACTERISTICS

| Symbol                                | Parameter <sup>(1)</sup>         | Test Conditions        |                            | Min. | Typ. <sup>(2)</sup> | Max. | Unit |
|---------------------------------------|----------------------------------|------------------------|----------------------------|------|---------------------|------|------|
| I <sub>BH</sub><br>I <sub>BHL</sub>   | Bus-Hold Input Sustain Current   | V <sub>CC</sub> = 3V   | V <sub>I</sub> = 2V        | -75  | —                   | —    | μA   |
|                                       |                                  |                        | V <sub>I</sub> = 0.8V      | 75   | —                   | —    |      |
| I <sub>BH</sub><br>I <sub>BHL</sub>   | Bus-Hold Input Sustain Current   | V <sub>CC</sub> = 2.3V | V <sub>I</sub> = 1.7V      | -45  | —                   | —    | μA   |
|                                       |                                  |                        | V <sub>I</sub> = 0.7V      | 45   | —                   | —    |      |
| I <sub>BHO</sub><br>I <sub>BHLO</sub> | Bus-Hold Input Overdrive Current | V <sub>CC</sub> = 3.6V | V <sub>I</sub> = 0 to 3.6V | —    | —                   | ±500 | μA   |

### NOTES:

1. Pins with Bus-Hold are identified in the pin description.
2. Typical values are at V<sub>CC</sub> = 3.3V, +25°C ambient.

## OUTPUT DRIVE CHARACTERISTICS, xYx PORTS

| Symbol | Parameter                 | Test Conditions <sup>(1)</sup> |                          | Min.      | Max. | Unit |
|--------|---------------------------|--------------------------------|--------------------------|-----------|------|------|
| VoH    | Output HIGH Voltage       | Vcc = 2.3V to 3.6V             | IoH = - 0.1mA            | Vcc - 0.2 | —    | V    |
|        |                           | Vcc = 2.3V                     | IoH = - 6mA, VIH = 1.7V  | 2         | —    |      |
|        |                           | Vcc = 2.3V                     | IoH = - 12mA, VIH = 1.7V | 1.7       | —    |      |
|        |                           | Vcc = 2.7V                     | IoH = - 12mA, VIH = 2V   | 2.2       | —    |      |
|        |                           | Vcc = 3V                       |                          | 2.4       | —    |      |
|        |                           | Vcc = 3V                       | IoH = - 24mA, VIH = 2V   | 2         | —    |      |
| VoL    | Output LOW Voltage        | Vcc = 2.3V to 3.6V             | IoL = 0.1mA              | —         | 0.2  | V    |
|        |                           | Vcc = 2.3V                     | IoL = 6mA, VIL = 0.7V    | —         | 0.4  |      |
|        |                           |                                | IoL = 12mA, VIL = 0.7V   | —         | 0.7  |      |
|        |                           | Vcc = 2.7V                     | IoL = 12mA, VIL = 0.8V   | —         | 0.4  |      |
|        |                           | Vcc = 3V                       | IoL = 24mA, VIL = 0.8V   | —         | 0.55 |      |
| IoH    | High-Level Output Current | Vcc = 2.3V                     | Y Port                   | —         | -12  | mA   |
|        |                           | Vcc = 2.7V                     |                          | —         | -12  |      |
|        |                           | Vcc = 3V                       | PARI/O                   | —         | -12  |      |
|        |                           |                                | Y Port                   | —         | -24  |      |
| IoL    | Low-Level Output Current  | Vcc = 2.3V                     | Y Port                   | —         | 12   | mA   |
|        |                           | Vcc = 2.7V                     |                          | —         | 12   |      |
|        |                           | Vcc = 3V                       | PARI/O                   | —         | 12   |      |
|        |                           |                                | Y Port                   | —         | 24   |      |
|        |                           |                                | YERR Output              | —         | 24   |      |

**NOTE:**  
1. VIH and VIL must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate Vcc range. TA = - 40°C to + 85°C.

## OUTPUT DRIVE CHARACTERISTICS FOR **YERR** AND PARI/O

| Symbol | Parameter        | Test Conditions <sup>(1)</sup> |                        | Min. | Max. | Unit |
|--------|------------------|--------------------------------|------------------------|------|------|------|
| VoH    | PARI/O           | Vcc = 3V                       | IoH = - 12mA, VIH = 2V | 2    | —    | V    |
| VoL    | PARI/O           | Vcc = 3V                       | IoL = 12mA, VIL = 0.8V | —    | 0.55 | V    |
| VoL    | YERR Output only | Vcc = 3V                       | IoL = 24mA             | —    | 0.5  | V    |

**NOTE:**  
1. VIH and VIL must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate Vcc range. TA = - 40°C to + 85°C.

OPERATING CHARACTERISTICS FOR BUFFER MODE,  $T_A = 25^\circ\text{C}$

| Symbol | Parameter                                      | Test Conditions                 | V <sub>CC</sub> = 2.5V ± 0.2V | V <sub>CC</sub> = 3.3V ± 0.3V | Unit |
|--------|--|---------------------------------|-------------------------------|-------------------------------|------|
|        |  |                                 | Typical                       | Typical                       |      |
| CPD    | Power Dissipation Capacitance Outputs enabled  | C <sub>L</sub> = 0pF, f = 10Mhz | 57.5                          | 65                            | pF   |
| CPD    | Power Dissipation Capacitance Outputs disabled |                                 | 15                            | 17.5                          |      |

www.DataSheet4U.com

OPERATING CHARACTERISTICS FOR REGISTER MODE,  $T_A = 25^\circ\text{C}$

| Symbol | Parameter                                      | Test Conditions                 | V <sub>CC</sub> = 2.5V ± 0.2V | V <sub>CC</sub> = 3.3V ± 0.3V | Unit |
|--------|--|---------------------------------|-------------------------------|-------------------------------|------|
|        |  |                                 | Typical                       | Typical                       |      |
| CPD    | Power Dissipation Capacitance Outputs enabled  | C <sub>L</sub> = 0pF, f = 10Mhz | 57                            | 87.5                          | pF   |
| CPD    | Power Dissipation Capacitance Outputs disabled |                                 | 16.5                          | 34                            |      |

SIMULTANEOUS SWITCHING CHARACTERISTICS<sup>(1)</sup>

| Parameter        |               | From<br>(Input) | To<br>(Output) | V <sub>CC</sub> = 2.5V ± 0.2V |      | V <sub>CC</sub> = 2.7V |      | V <sub>CC</sub> = 3.3V ± 0.3V |      | Unit |
|------------------|---------------|-----------------|----------------|-------------------------------|------|------------------------|------|-------------------------------|------|------|
|                  |               |                 |                | Min.                          | Max. | Min.                   | Max. | Min.                          | Max. |      |
| t <sub>PLH</sub> | Register mode | CLK             | Y              | 1.8                           | 6.5  |                        | 6.1  | 1.8                           | 5    | ns   |
| t <sub>PHL</sub> |               |                 |                | 1.4                           | 5.9  |                        | 5.1  | 1.7                           | 4.5  |      |

NOTE:

1. All outputs switching.

SWITCHING CHARACTERISTICS<sup>(1)</sup>

| Symbol                               | Parameter   | V <sub>CC</sub> = 2.5V ± 0.2V |      | V <sub>CC</sub> = 2.7V |      | V <sub>CC</sub> = 3.3V ± 0.3V |      | Unit |
|--------------------------------------|---|-------------------------------|------|------------------------|------|-------------------------------|------|------|
|                                      |   | Min.                          | Max. | Min.                   | Max. | Min.                          | Max. |      |
| f <sub>MAX</sub>                     |   | 125                           | —    | 125                    | —    | 125                           | —    | MHz  |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay, Buffer Mode<br>xAx to xYx                          | 1                             | 4.4  | —                      | 4.2  | 1.1                           | 3.8  | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay, Both Modes<br>CLK to $\overline{YERR}$             | 1                             | 5.7  | —                      | 4.9  | 1.4                           | 4.4  | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay, Both Modes<br>CLK to PARI/O                        | 1.2                           | 8.6  | —                      | 7.9  | 1.7                           | 6.6  | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay, Both Modes<br>CLK to PARI/O                        | 1                             | 6.8  | —                      | 5.2  | 1.3                           | 4.5  | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay, Both Modes<br>Mode to xYx                          | 1                             | 5.9  | —                      | 5.8  | 1.3                           | 4.9  | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay, Register Mode<br>CLK to xYx                        | 1                             | 6.1  | —                      | 5.5  | 1.2                           | 4.8  | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay, Both Modes<br>$\overline{OE}$ to $\overline{YERR}$ | 1                             | 3.6  | —                      | 4.2  | 1.9                           | 4    | ns   |
| t <sub>PHL</sub>                     | Propagation Delay, Both Modes<br>$\overline{OE}$ to $\overline{YERR}$ | 1.2                           | 5.1  | —                      | 4.9  | 1.5                           | 4.2  | ns   |
| t <sub>PZH</sub><br>t <sub>PZL</sub> | Output Enable Time, Both Modes<br>$\overline{OE}$ to xYx              | 1.1                           | 6.5  | —                      | 6.4  | 1.4                           | 5.4  | ns   |
| t <sub>PZH</sub><br>t <sub>PZL</sub> | Output Enable Time, Both Modes<br>$\overline{PAROE}$ to PARI/O        | 1                             | 5.6  | —                      | 6    | 1                             | 4.8  | ns   |
| t <sub>PHZ</sub><br>t <sub>PLZ</sub> | Output Disable Time, Both Modes<br>$\overline{OE}$ to xYx             | 1                             | 6.4  | —                      | 5.2  | 1.7                           | 5    | ns   |
| t <sub>PHZ</sub><br>t <sub>PLZ</sub> | Output Disable Time, Both Modes<br>$\overline{PAROE}$ to PARI/O       | 1                             | 3.2  | —                      | 3.8  | 1.2                           | 3.8  | ns   |
| t <sub>SU</sub>                      | Set-up Time, Register Mode, 1A-12A before CLK↑                        | 1.7                           | —    | 1.9                    | —    | 1.45                          | —    | ns   |
| t <sub>SU</sub>                      | Set-up Time, Buffer Mode, 1A to 10A before CLK↑                       | 5.9                           | —    | 5.2                    | —    | 4.4                           | —    | ns   |
| t <sub>SU</sub>                      | Set-up Time, Register Mode, APAR before CLK↑                          | 1.2                           | —    | 1.5                    | —    | 1.3                           | —    | ns   |
| t <sub>SU</sub>                      | Set-up Time, Buffer Mode, APAR before CLK↑                            | 4.6                           | —    | 3.6                    | —    | 3.1                           | —    | ns   |
| t <sub>SU</sub>                      | Set-up Time, Both Modes, PARI/O before CLK↑                           | 2.4                           | —    | 2                      | —    | 1.7                           | —    | ns   |
| t <sub>SU</sub>                      | Set-up Time, Buffer Mode, 11A/ $\overline{YERREN}$ before CLK↑        | 2                             | —    | 1.9                    | —    | 1.6                           | —    | ns   |
| t <sub>SU</sub>                      | Set-up Time, Register Mode, $\overline{CLKEN}$ before CLK↑            | 2.5                           | —    | 2.6                    | —    | 2.2                           | —    | ns   |
| t <sub>H</sub>                       | Hold Time, Register Mode, 1A-12A after CLK↑                           | 0.4                           | —    | 0.25                   | —    | 0.55                          | —    | ns   |
| t <sub>H</sub>                       | Hold Time, Buffer Mode, 1A-10A after CLK↑                             | 0.25                          | —    | 0.25                   | —    | 0.25                          | —    | ns   |
| t <sub>H</sub>                       | Hold Time, Register Mode, APAR after CLK↑                             | 0.7                           | —    | 0.4                    | —    | 0.7                           | —    | ns   |
| t <sub>H</sub>                       | Hold Time, Buffer Mode, APAR after CLK↑                               | 0.25                          | —    | 0.25                   | —    | 0.25                          | —    | ns   |
| t <sub>H</sub>                       | Hold Time, Register Mode, PARI/O after CLK↑                           | 0.25                          | —    | 0.25                   | —    | 0.4                           | —    | ns   |
| t <sub>H</sub>                       | Hold Time, Buffer Mode, PARI/O after CLK↑                             | 0.25                          | —    | 0.25                   | —    | 0.5                           | —    | ns   |
| t <sub>H</sub>                       | Hold Time, Buffer Mode, 11A/ $\overline{YERREN}$ after CLK↑           | 0.25                          | —    | 0.25                   | —    | 0.4                           | —    | ns   |
| t <sub>H</sub>                       | Hold Time, Register Mode, $\overline{CLKEN}$ after CLK↑               | 0.25                          | —    | 0.5                    | —    | 0.4                           | —    | ns   |
| t <sub>w</sub>                       | Pulse Width, CLK↑   | 3                             | —    | 3                      | —    | 3                             | —    | ns   |
| t <sub>SK(O)</sub>                   | Output Skew <sup>(2)</sup>  | —                             | —    | —                      | —    | —                             | 500  | ps   |


NOTES:

- See TEST CIRCUITS AND WAVEFORMS. T<sub>A</sub> = - 40°C to + 85°C.
- Skew between any two outputs of the same package and switching in the same direction.

## TEST CIRCUITS AND WAVEFORMS

### TEST CONDITIONS

| Symbol            | V <sub>CC</sub> <sup>(1)</sup> =3.3V±0.3V | V <sub>CC</sub> <sup>(1)</sup> =2.7V | V <sub>CC</sub> <sup>(2)</sup> =2.5V±0.2V | Unit |
|-------------------|---|--------------------------------------|---|------|
| V <sub>LOAD</sub> | 6   | 6                                    | 2 x V <sub>CC</sub>                       | V    |
| V <sub>IH</sub>   | 2.7                                       | 2.7                                  | V <sub>CC</sub>                           | V    |
| V <sub>T</sub>    | 1.5                                       | 1.5                                  | V <sub>CC</sub> / 2                       | V    |
| V <sub>LZ</sub>   | 300                                       | 300                                  | 150                                       | mV   |
| V <sub>HZ</sub>   | 300                                       | 300                                  | 150                                       | mV   |
| C <sub>L</sub>    | 50  | 50                                   | 30  | pF   |

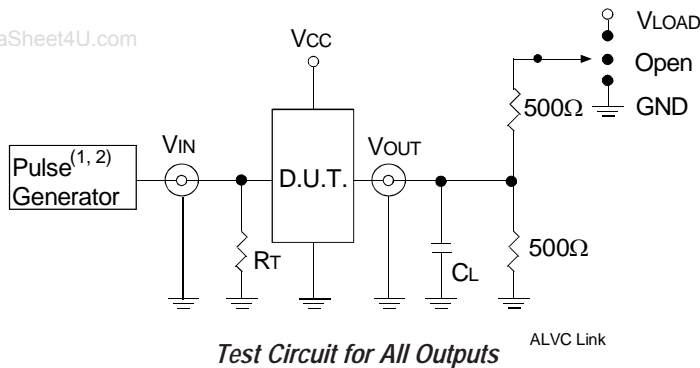

#### DEFINITIONS:


C<sub>L</sub> = Load capacitance: includes jig and probe capacitance.  
R<sub>T</sub> = Termination resistance: should be equal to Z<sub>OUT</sub> of the Pulse Generator.

#### NOTES:

1. Pulse Generator for All Pulses: Rate ≤ 1.0MHz; t<sub>r</sub> ≤ 2.5ns; t<sub>r</sub> ≤ 2.5ns.
2. Pulse Generator for All Pulses: Rate ≤ 1.0MHz; t<sub>r</sub> ≤ 2ns; t<sub>r</sub> ≤ 2ns.



### SWITCH POSITION

| Test                                    | Switch            |
|---|-------------------|
| Open Drain<br>Disable Low<br>Enable Low | V <sub>LOAD</sub> |
| Disable High<br>Enable High             | GND               |
| All Other Tests                         | Open              |

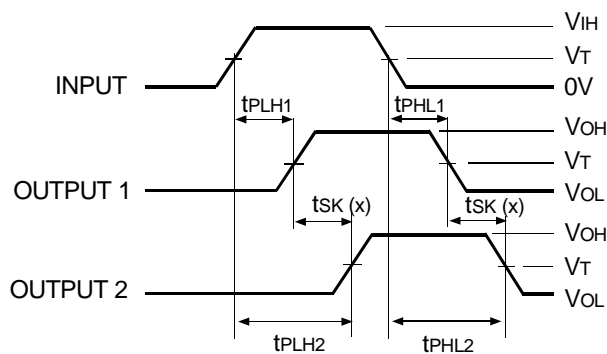



#### NOTES:

1. For t<sub>SK</sub>(a) OUTPUT1 and OUTPUT2 are any two outputs.
2. For t<sub>SK</sub>(b) OUTPUT1 and OUTPUT2 are in the same bank.

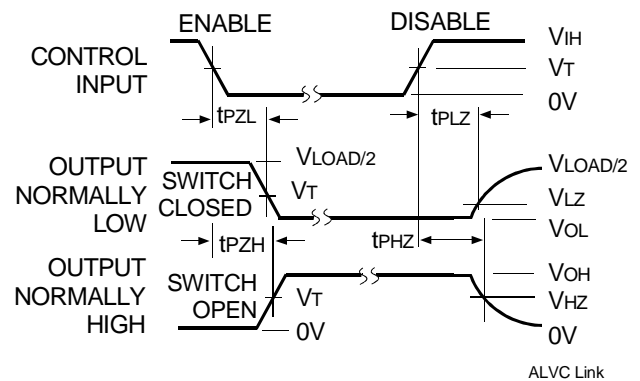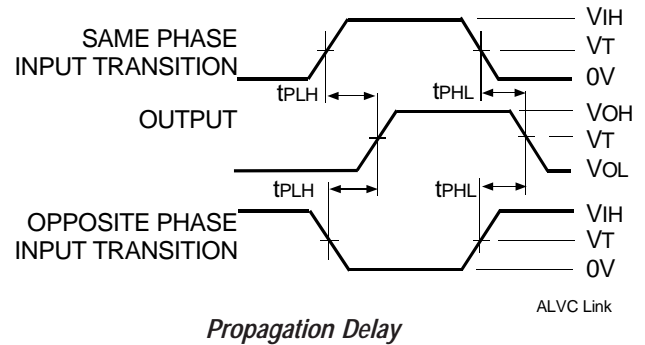

#### NOTE:


1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

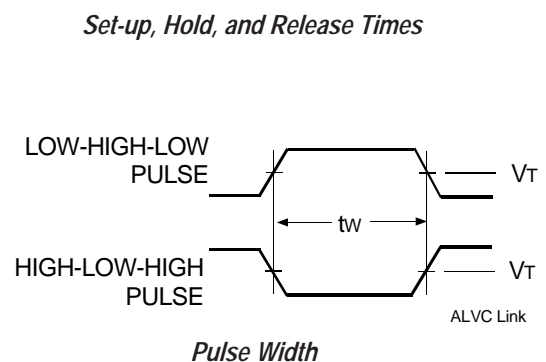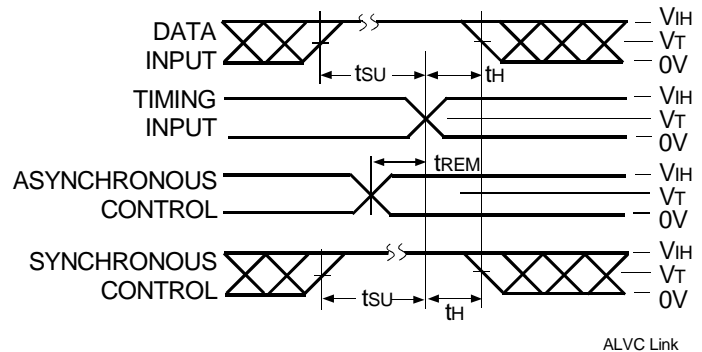



PARAMETER MEASUREMENT INFORMATION


V<sub>CC</sub> = 2.7V AND 3.3V ± 0.3V

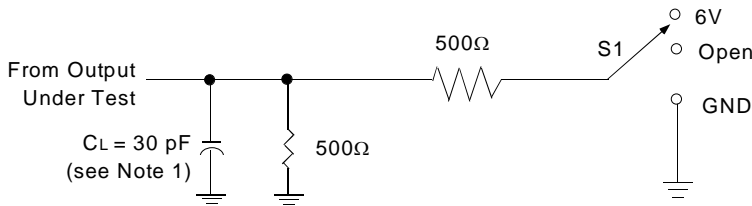


Load Circuit

| TEST                               | S1   |
|------------------------------------|------|
| t <sub>pd</sub>                    | Open |
| t <sub>PLZ</sub> /t <sub>PZL</sub> | 6V   |
| t <sub>PHZ</sub> /t <sub>PZH</sub> | GND  |


| YERR                          | S1 |
|-------------------------------|----|
| t <sub>PHL</sub> (see Note 8) | 6V |
| t <sub>PLH</sub> (see Note 9) | 6V |

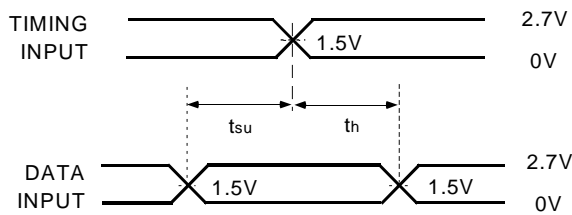


Voltage Waveforms Setup and Hold Times



Voltage Waveforms Pulse Duration

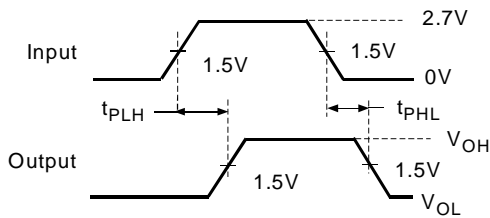

Voltage Waveforms Propagation Delay Times

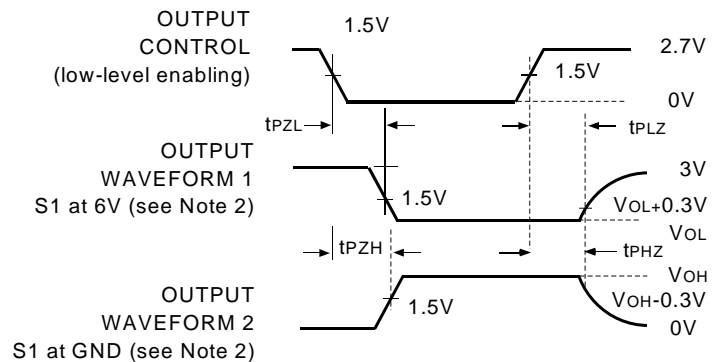


Voltage Waveforms Enable and Disable Times

NOTES:

1. C<sub>L</sub> includes probe and jig capacitance.
2. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
3. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z<sub>o</sub> = 50Ω, t<sub>r</sub> ≤ 2 ns, t<sub>f</sub> ≤ 2 ns.
4. The outputs are measured one at a time with one transition per measurement.
5. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dis</sub>.
6. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
7. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd</sub>.
8. t<sub>PHL</sub> is measured at 1.5V.
9. t<sub>PLH</sub> is measured at V<sub>OL</sub> + 0.3V.


## LOAD CIRCUIT AND VOLTAGE WAVEFORMS

$V_{CC} = 2.7V$  AND  $3.3V \pm 0.3V$

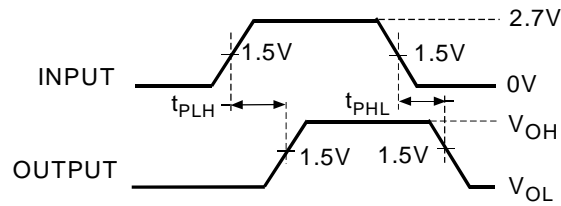

www.DataSheet4U.com


### *PARI/O Load Circuit*

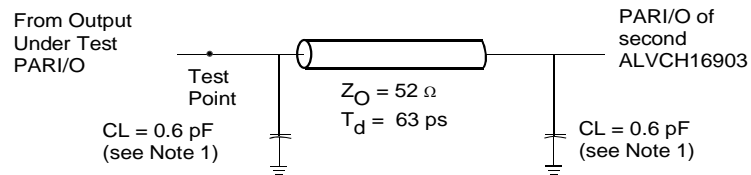

**NOTE:**

1.  $C_L$  includes probe and jig capacitance.

PARAMETER MEASUREMENT INFORMATION  
 $V_{CC} = 2.5V \pm 0.2V$

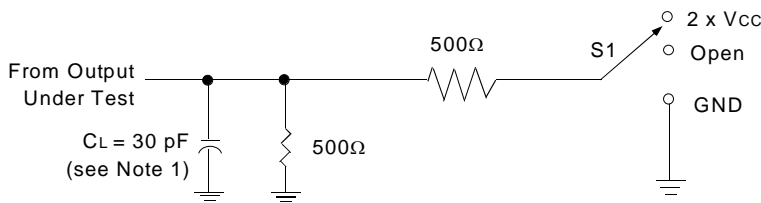


Load Circuit


| TEST              | S1                |
|-------------------|-------------------|
| $t_{pd}$          | Open              |
| $t_{PLZ}/t_{PZL}$ | $2 \times V_{CC}$ |
| $t_{PHZ}/t_{PZH}$ | GND               |

| YERR                   | S1                |
|------------------------|-------------------|
| $t_{PHL}$ (see Note 8) | $2 \times V_{CC}$ |
| $t_{PLH}$ (see Note 9) | $2 \times V_{CC}$ |


www.DataSheet4U.com

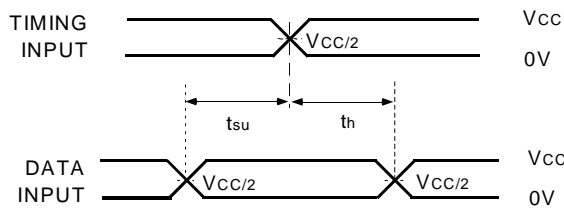


Voltage Waveforms  
Setup and Hold Times



Voltage Waveforms  
Pulse Duration

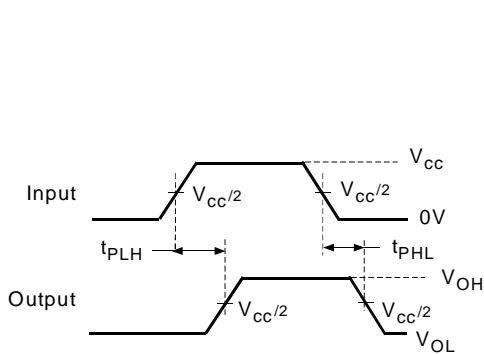

Voltage Waveforms  
Propagation Delay Times

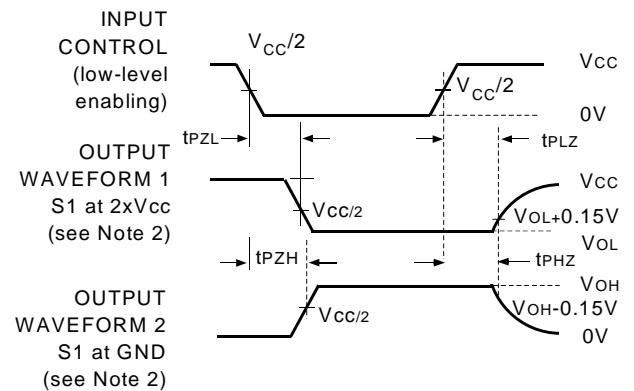


Voltage Waveforms  
Enable and Disable Times

NOTES:


1.  $C_L$  includes probe and jig capacitance.
2. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
3. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_o = 50\Omega$ ,  $t_r \leq 2 \text{ ns}$ ,  $t_f \leq 2 \text{ ns}$ .
4. The outputs are measured one at a time with one transition per measurement.
5.  $t_{PZL}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
6.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
7.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
8.  $t_{PHL}$  is measured at  $V_{CC}/2$ .
9.  $t_{PLH}$  is measured at  $V_{OL} + 0.15V$ .

PARAMETER MEASUREMENT INFORMATION

$V_{CC} = 2.5V \pm 0.2V$

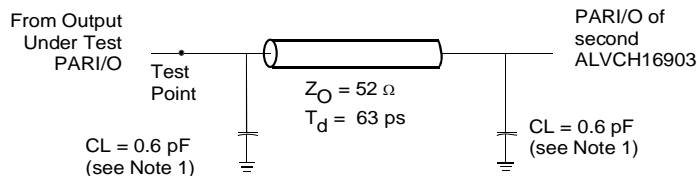


Load Circuit

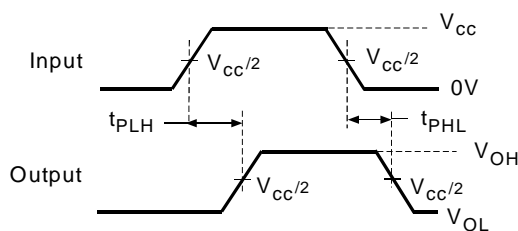


Voltage Waveforms  
Propagation Delay Times

NOTES:

1. CL includes probe and jig capacitance.
2. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz, Z<sub>o</sub> = 50Ω, t<sub>r</sub>  $\leq$  2 ns, t<sub>f</sub>  $\leq$  2ns.
3. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd</sub>.

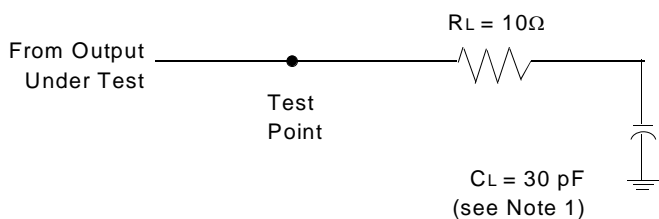

Load Circuit

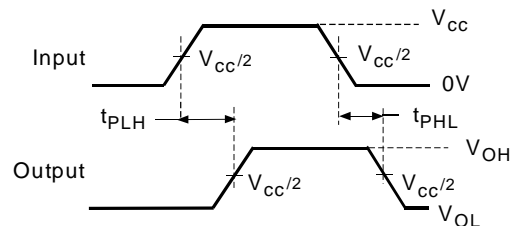


Voltage Waveforms  
Propagation Delay Times

NOTES:

1. CL includes probe and jig capacitance.
2. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz, Z<sub>o</sub> = 50Ω, t<sub>r</sub>  $\leq$  2 ns, t<sub>f</sub>  $\leq$  2ns.

**ORDERING INFORMATION**

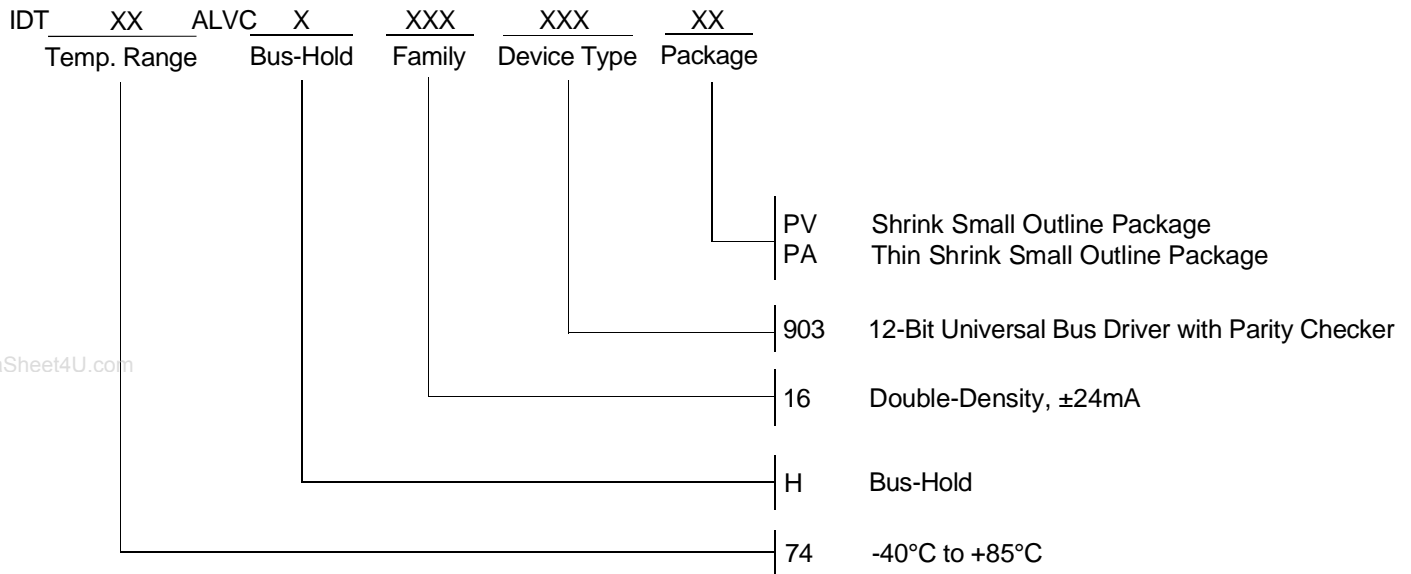

www.DataSheet4U.com



**CORPORATE HEADQUARTERS**  
 2975 Stender Way  
 Santa Clara, CA 95054

**for SALES:**  
 800-345-7015 or 408-727-6116  
 fax: 408-492-8674  
 www.idt.com

**for Tech Support:**  
 logichelp@idt.com  
 (408) 654-6459