

Micro Commercial Components



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 (818) 701-4939 Fax:

2SC2873-0

2SC2873-Y

NPN Silicon

Epitaxial Transistors

Features


- Low saturation voltage
- High speed switching time
- Complementary to 2SA1213
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisure Sensitivity Level 1

Maximum Ratings

Symbol	Rating	Rating	Unit
V _{CEO}	Collector-Emitter Voltage	50	V
V _{CBO}	Collector-Base Voltage	50	V
V _{EBO}	Emitter-Base Voltage	5.0	V
I _C	Collector Current	2.0	Α
Pc	Collector power dissipation	0.5	W
TJ	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55 to +150	°C

Electrical Characteristics @ 25° C Unless Otherwise Specified

Symbol	Parameter		Min	Тур	Max	Units	
OFF CHARA	CTERISTICS						
V _{(BR)CEO}	Collector-E (I _c =1mAc	50			Vdc		
V (BR)CBO	Collector-B (I _c =0.1mA	50			Vdc		
V _{(BR)EBO}	Emitter-Bas (I _E =0.1mA	5.0			Vdc		
I _{CBO}	Collector-B (V _{CB} =50V			0.1	uAdc		
I _{EBO}	Emitter-Bas (V _{EB} =5.0)			0.1	uAdc		
ON CHARA	CTERISTIC						
h _{FE(1)}	DC Current (I _c =0.5Ac	70		240			
h _{FE(2)}	DC Current (I _c =2.0Ac	20					
V _{CE(sat)}	Collector-Emitter Saturation Voltage (I _c =1.0Adc, I _B =0.05Adc)				0.5	Vdc	
V _{BE(sat)}	Base-Emitter Saturation Voltage (I _c =1.0Adc,I _B =0.05Adc)				1.2	Vdc	
f _T	Transition Frequency (V _{cE} =2.0Vdc, I _c =0.5Adc)			120		MHz	
C _{ob}	Collector output capacitance (V _{CB} =10Vdc,I _E =0, f=1.0MHz)			30		pF	
CLASSIFIC	ATION OF H	E(1)					
Ra	ank	0		Y			
	nge	70-140		120-240			
Mar	king	MO		MY			

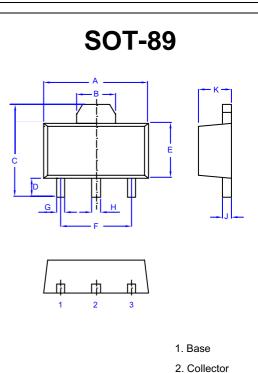

- 3. Emitter


DIMENSINS					
DIM	INCHES		MM		NOTES
	MIN	MAX	MIN	MAX	
A	.173	.181	4.39	4.60	
В	.063	.071	1.60	1.80	
С	.154	.165	3.91	4.19	
D	.031	.039	0.80	1.00	
E	.092	.100	2.34	2.54	
F	.118		3.00		TYP
G	.013	.019	0.33	0.48	
Н	.015	.021	0.38	0.53	
J	.015	.016	0.38	0.41	
К	.055	.063	1.40	1.60	

www.mccsemi.com

2SC2873

 $\cdot M \cdot C \cdot C \cdot$

Micro Commercial Components

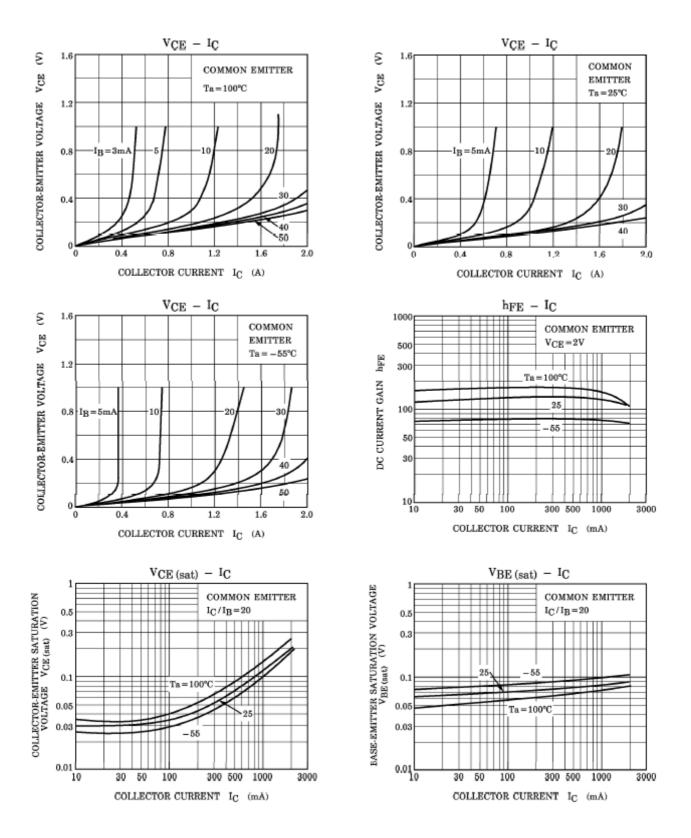


- www.mccsemi.com

2SC2873



IC - VBE 2.0COMMON EMITTER ₹ VCE=2V 2 1.5 COLLECTOR CURRENT Ta=100°C 25 -55 1.0 0.5 0 L 0 0.4 0.8 1.2 1.6 2.0 BASE-EMITTER VOLTAGE VBE (V) PC - Ta 1.21) MOUTED ON CERAMIC SUBSTRATE (250mm²×0.8t) COLLECTOR POWER DISSIPATION PC (W) ŵ 1.0 $Ta = 25^{\circ}C$ Ð 8.0 0.6 2 0.4 0.2

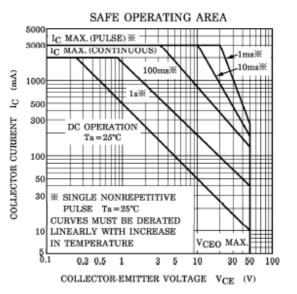

- www.mccsemi.com

0 0

40

20

60

80

AMBIENT TEMPERATURE Ta (°C)

120

100

140 160



Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel 1Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com

