

Photocoupler

KODENSHI

K3640 • K3641

These Photocouplers consist of two Gallium Arsenide Infrared Emitting Diodes and a Silicon NPN PhotoDarlington transistor in a 6-pin package.

FEATURES

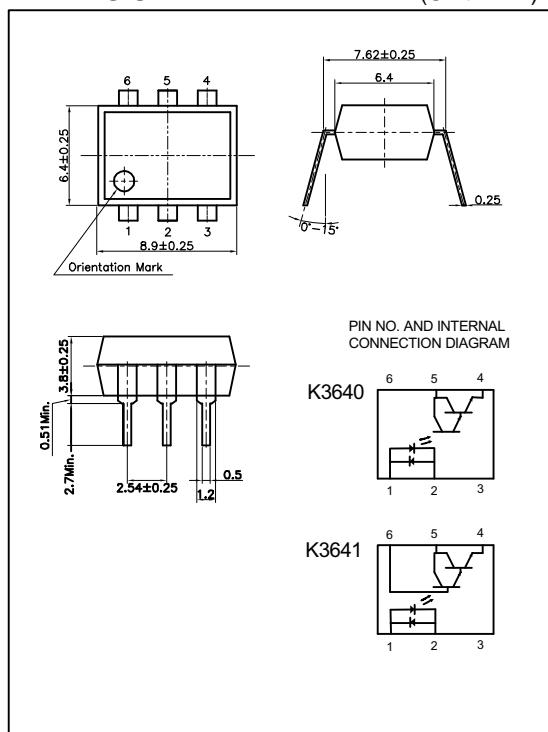
- Collector-Emitter Voltage : Min.35V
- Current Transfer Ratio : Typ.500% (at $I_F = \pm 1\text{mA}$, $V_{CE} = 2\text{V}$)
- Electrical Isolation Voltage : AC2500Vrms
- Without Base Connection : K3640
- With Base Connection : K3641
- UL Recognized File No. E107486

APPLICATIONS

- Interface between two circuits of different potential
- Telephone Line Receiver
- Automatic Vending Machine
- Power Supply Regulators

DIMENSION

(Unit : mm)



MAXIMUM RATINGS

(Ta=25 °C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I _F	± 60	mA
	Peak Forward Current ^{*1}	I _{FP}	± 1	A
	Power Dissipation	P _D	150	mW
	Junction Temperature	T _J	125	
Output	Collector-Emitter Breakdown Voltage	BV _{C EO}	35	V
	Emitter-Collector Breakdown Voltage	BV _{E CO}	6	V
	Collector-Base Breakdown Voltage ^{**}	BV _{C BO}	35	V
	Collector Current	I _C	50	mA
	Collector Power Dissipation	P _C	150	mW
Input to Output Isolation Voltage ^{*2}		V _{iso}	AC2500	V _{rms}
Storage Temperature		T _{stg}	-55~+125	
Operating Temperature		T _{opr}	-30~+100	
Lead Soldering Temperature ^{*3}		T _{sol}	260	
Total Power Dissipation		P _{tot}	200	mW

^{**} Except for K3640

^{*1}. Input current with 100ms pulse width, 1% duty cycle

^{*2}. Measured at RH=40~60% for 1min

^{*3}. 1/16 inch form case for 10sec

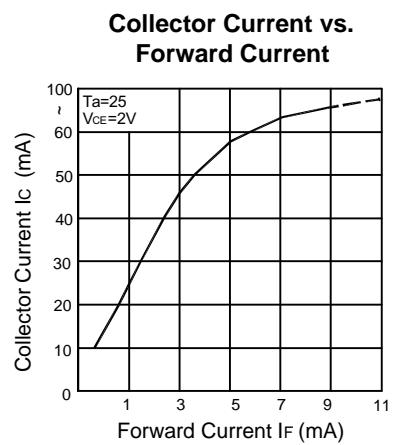
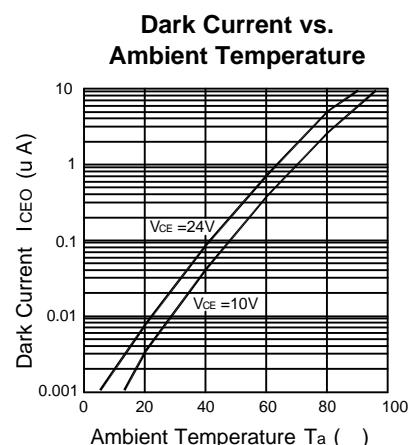
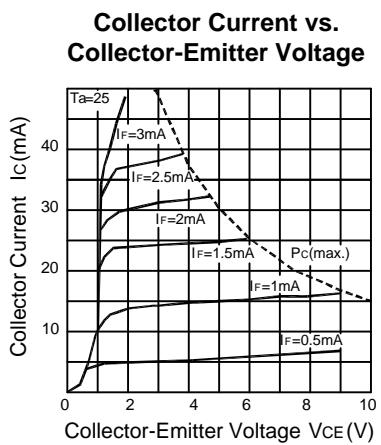
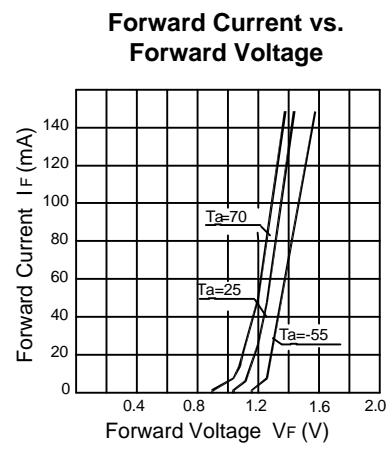
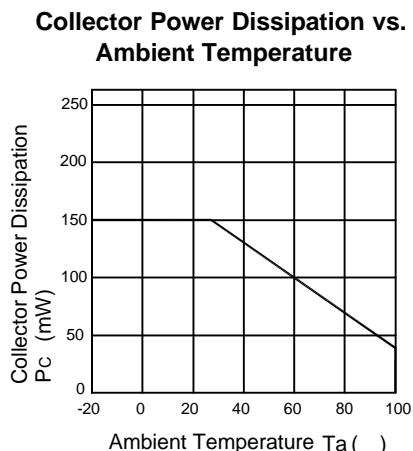
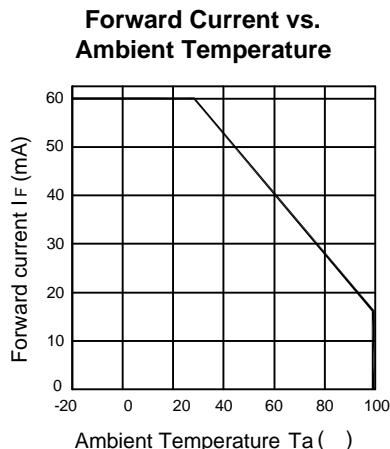
K3640 • K3641**ELECTRO-OPTICAL CHARACTERISTICS**

(Ta=25 , unless otherwise noted)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V _F	I _F = ±10mA	-	1.15	1.30	V
	Capacitance	C _T	V=0, f=1MHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BV _{C EO}	I _C =1mA	35	-	-	V
	Emitter-Collector Breakdown Voltage	BV _{E CO}	I _E =0.1mA	6	-	-	V
	Collector-Base Breakdown Voltage **	BV _{C BO}	I _C =0.1mA	35	-	-	V
	Collector Dark Current	I _{CEO}	I _F =0, V _{CE} =10V	-	-	100	nA
	Capacitance	C _{CE}	V _{CE} =0, f=1MHz	-	10	-	pF
Coupled	Current Transfer Ratio ^{*4}	CTR	I _F = ±1mA, V _{CE} =2V		500	-	%
	Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _F = ±1mA, I _C =2mA	-	0.85	1.0	V
	Input-Output Capacitance	C _{IO}	V=0, f=1MHz	-	1	-	pF
	Input-Output Isolation Resistance	R _{IO}	RH=40~60%, V=500V	-	10 ¹¹	-	
	Rise Time	tr	V _{CE} =10V, R _L =100 I _C =2mA	-	100	-	
	Fall Time	tf		-	100	-	

** Except for K3640

*4. CTR=(I_C/I_F) X 100 (%)

K3640 • K3641**Switching Time Test Circuit**