# Kingbright

## PHOTOCOUPLER

## Part Number: KB357NT

#### Features

1.Opaque type, mini-flat package.

2.Subminiature type(The volume is smaller than that of our conventional DIP type by as far as 30%).

3.Isolation voltage between input and output Viso:3750Vrms.

4. Employs double transfer mold technology.

5.Recognized by UL and CUL, file NO.E225308.

6.Approved by VDE 0884 Teil2(NO:40017614).

7.Package: 1000Pcs / Reel.


8.RoHS Compliant.

#### Applications

1.Hybrid substrates that require high density mounting.

2. Programmable controllers.

#### \*PACKAGE DIMENSIONS (UNIT:mm) SMD Type

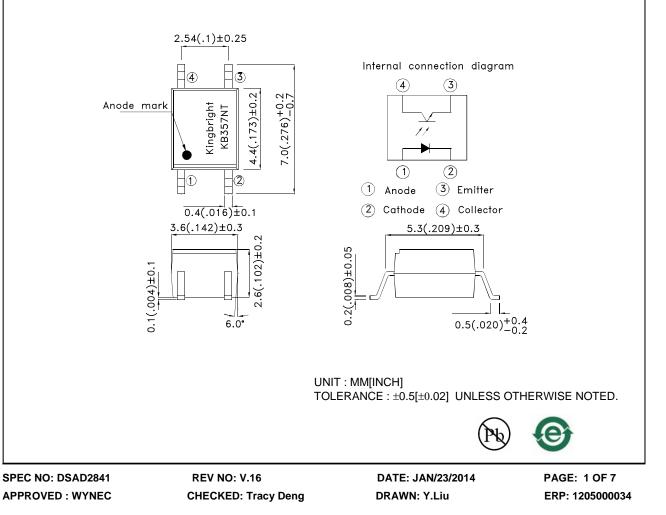

#### PHOTOCOUPLER

## Kingbright

## Part Number: KB357NT

### \*Absolute Maximum Ratings (Ta=25°C)


Parameter		Symbol	Rating	Unit
	Forward current	lF	50	mA
Input	Reverse Voltage	VR	6	V
	Power dissipation	Р	70	mW
Output	Collector-emitter voltage	Vceo	35	V
	Emitter-collector voltage	Veco	6	V
	Collector current	IC	50	mA
	Collector power dissipation	Pc	150	mW
Total power dissipation		Ptot	170	mW
<sup>*1</sup> Isolation voltage		Viso	3750	Vrms
Operating temperature		Topr	-30 to +100	٥C
Storage temperature		Tstg	-40 to +125	°C
*2 Soldering temperature		Tsol	260	°C

\*1 40 to 60%RH, AC for1 minute. \*2 For 10 seconds.

#### \*Electro-optical Characteristics

Parameter		Symbol	Conditions	Min.	Тур.	Max.	Unit	
Input	Forward voltage		VF	IF=20mA	-	1.2	1.4	V
	Peak forward voltage		Vfm	IFM=0.5A	-	-	3.0	V
	Reverse Current		lr	VR=4V	-	-	10	uA
Output	Collector dark current		ICEO	Vce=20V IF=0V	-	-	10 <sup>-7</sup>	А
Transfer charact- eristics	Current transfer ratio		CTR	IF=5mA Vce=5V	50	-	600	%
	Collector-emitter saturation voltage		VCE (sat)	IF=20mA Ic=1mA	-	-	0.2	V
	Response	Rise time	tr	Vce=2V Ic=2mA RL=100Ω	-	4	18	uS
		Fall time	tf			3	18	uS


Model No.	Rank mark	CTR(%)
KB357NLT	L	50 to 100
KB357N1T	A	80 to 160
KB357N2T	В	130 to 260
KB357N3T	С	200 to 400
KB357N4T	D	300 to 600
KB357N5T	A or B	80 to 260
KB357N6T	B or C	130 to 400
KB357N7T	C or D	200 to 600
KB357N8T	A,B or C	80 to 400
KB357N9T	B,C or D	130 to 600
KB357N0T	A,B,C or D	80 to 600
KB357NT	L,A,B,C,D or No mark	50 to 600

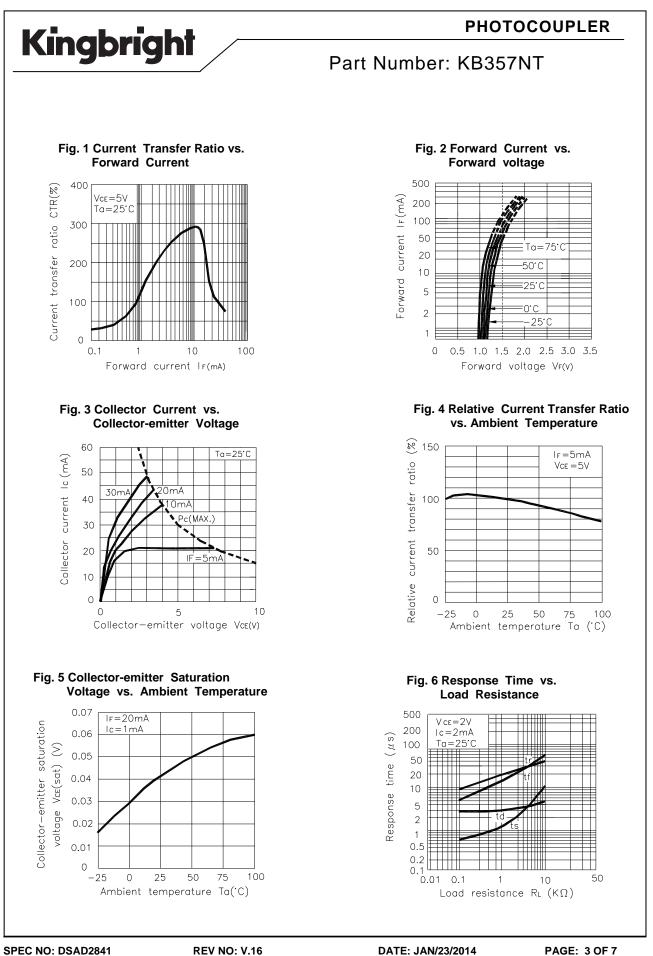

APPROVED : WYNEC

DATE: JAN/23/2014 DRAWN: Y.Liu

PAGE: 3 OF 7 ERP: 1205000034

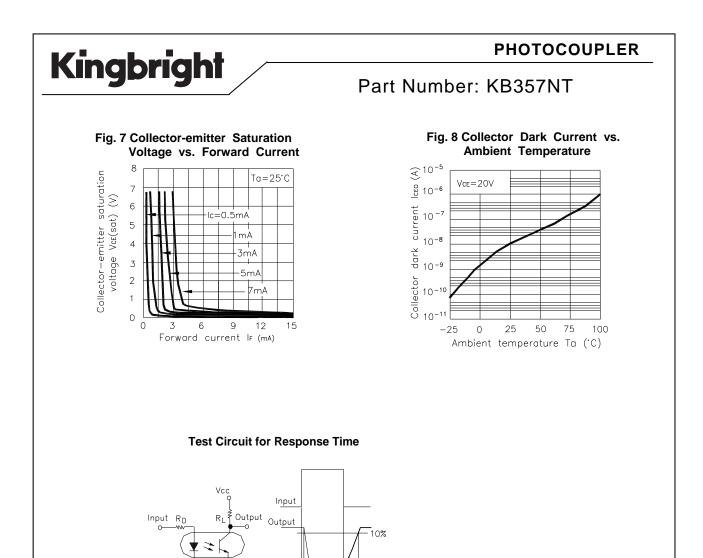

90%

tf

td

tr

ts

#### PHOTOCOUPLER

## **Kingbright**


Part Number: KB357NT

### **\*NOTES ON HANDLING**

#### 1.Cautions regarding noise

Be aware that power is suddenly into the componment any surge current may cause damage happen, even if the voltage is within the absolute maximum ratings.



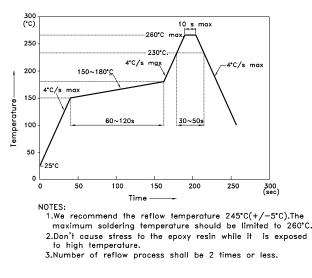


#### CAUTION


Within this device there exists GaAs (Gallium Arsenide) material which is a harmful substance if ingested. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them.

### RESTRICTIONS ON PRODUCT USE

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version. Not all devices / types available in every country.

We are mention about our product quality stablity, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing KINGBRIGHT products, to observe standards of safety, and to a avoid situations in which a malfunction or failure of a KINGBRIGHT product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that KINGBRIGHT products are used within specified operating ranges as set forth in the most recent products specifications.

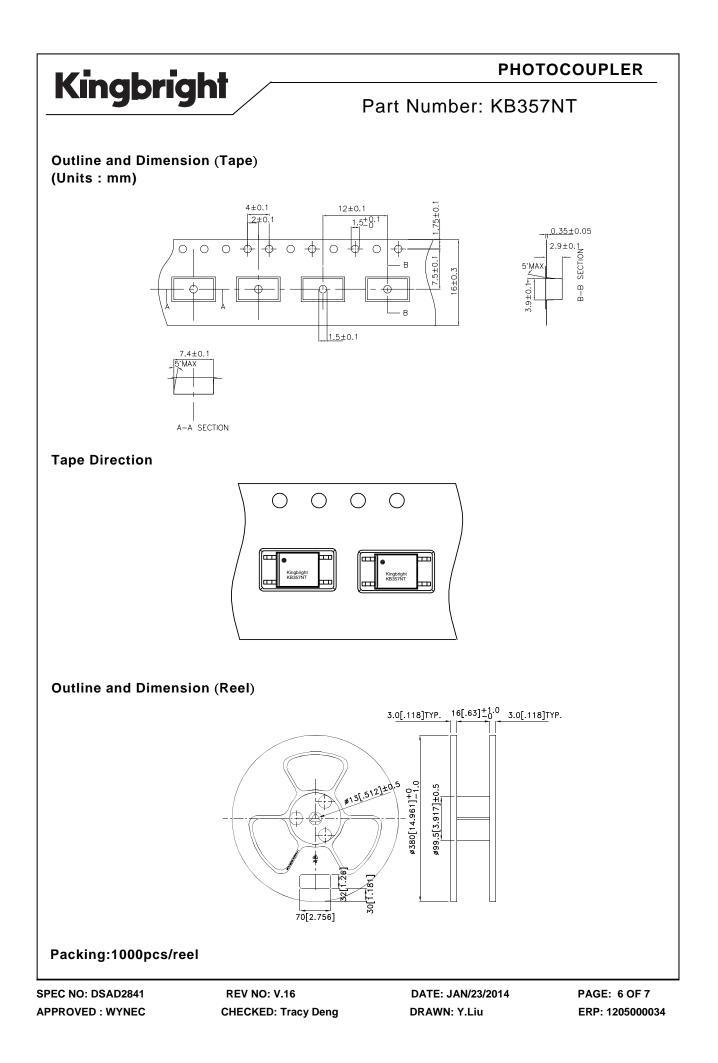

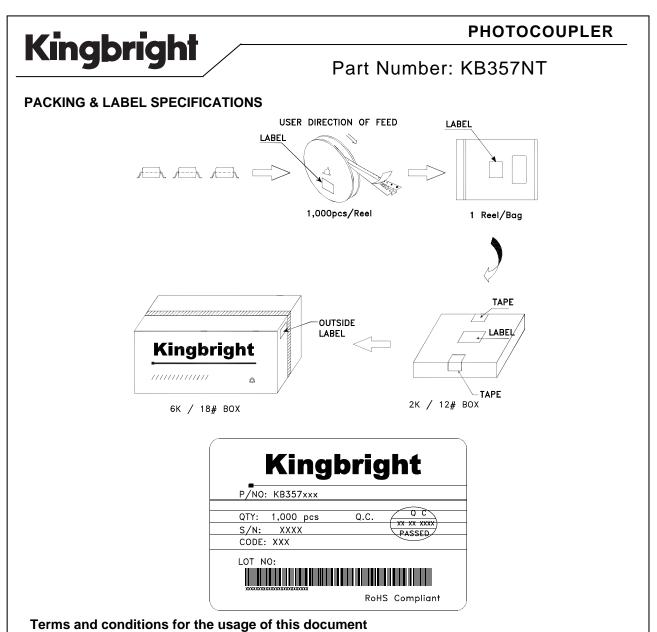

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3.When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
- 6.All design applications should refer to Kingbright application notes available at <a href="http://www.kingbright.com/application\_notes">http://www.kingbright.com/application\_notes</a>