


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES

- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.
- Suffix **U** : Qualified to AEC-Q101.
ex) KRC401-RTK/H**U**
- Suffix **A** : USM(1) Package.
ex) KRC401-RTK/P**A**

EQUIVALENT CIRCUIT




BIAS RESISTOR VALUES

TYPE NO.	R1(kΩ)	R2(kΩ)
KRC401	4.7	4.7
KRC402	10	10
KRC403	22	22
KRC404	47	47
KRC405	2.2	47
KRC406	4.7	47



MARK SPEC

TYPE	KRC401	KRC402	KRC403
MARK	NA	NB	NC
TYPE	KRC404	KRC405	KRC406
MARK	ND	NE	NF

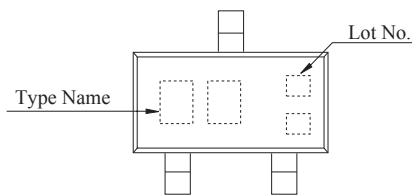

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC401 ~ 406	V _O	50	V
Input Voltage	KRC401	V _I	20, -10	V
	KRC402		30, -10	
	KRC403		40, -10	
	KRC404		40, -10	
	KRC405		12, -5	
	KRC406		20, -5	
Output Current	KRC401 ~ 406	I _O	100	mA
Power Dissipation		P _D	100	mW
Junction Temperature		T _j	-55~150	°C
Storage Temperature Range		T _{stg}	-55~150	°C

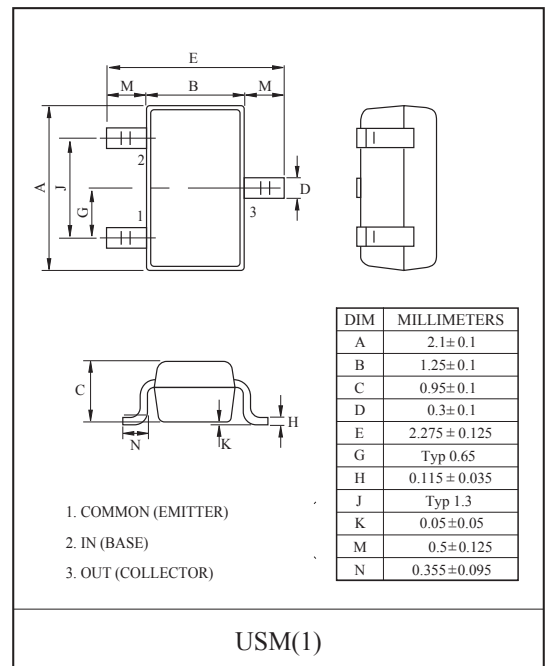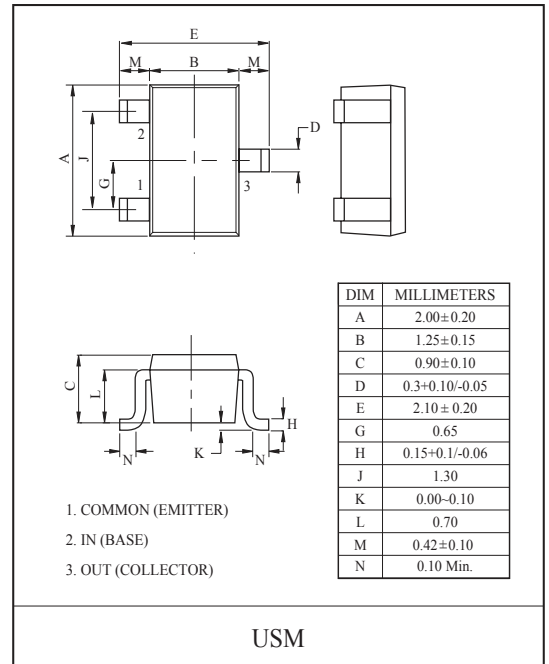

KRC401~KRC406

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC401 ~ 406	$I_{O(OFF)}$	$V_O=50V, V_I=0$	-	-	500	nA
DC Current Gain	KRC401	G_I	$V_O=5V, I_O=10mA$	30	55	-	
	KRC402			50	80	-	
	KRC403			70	120	-	
	KRC404			80	200	-	
	KRC405			80	200	-	
	KRC406			80	200	-	
Output Voltage	KRC401 ~ 406	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	V
Input Voltage (ON)	KRC401	$V_{I(ON)}$	$V_O=0.2V, I_O=5mA$	-	1.5	2.0	V
	KRC402			-	1.8	2.4	
	KRC403			-	2.1	3.0	
	KRC404			-	2.8	5.0	
	KRC405			-	0.8	1.1	
	KRC406			-	0.9	1.3	
Input Voltage (OFF)	KRC401 ~ 404	$V_{I(OFF)}$	$V_O=5V, I_O=0.1mA$	1.0	1.2	-	V
	KRC405 ~ 406			0.5	0.65	-	
Transition Frequency	KRC401 ~ 406	f_T^*	$V_O=10V, I_O=5mA$	-	200	-	MHz
Input Current	KRC401	I_I	$V_I=5V$	-	-	1.8	mA
	KRC402			-	-	0.88	
	KRC403			-	-	0.36	
	KRC404			-	-	0.18	
	KRC405			-	-	3.6	
	KRC406			-	-	1.8	
Input Resistor	KRC401	R1	-	3.29	4.7	6.11	kΩ
	KRC402			7	10	13	
	KRC403			15.4	22	28.6	
	KRC404			32.9	47	61.1	
	KRC405			1.54	2.2	2.86	
	KRC406			3.29	4.7	6.11	
Resistor Ratio	KRC401~404	R2/R1	-	0.8	1.0	1.2	
	KRC405			17	21	26	
	KRC406			8	10	12	







Note : * Characteristic of Transistor Only.

KRC401~KRC406







ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRC401	V _O =5V V _{IN} =5V R _L =1kΩ	-	0.03	-	μS
		KRC402		-	0.05	-	
		KRC403		-	0.12	-	
		KRC404		-	0.22	-	
		KRC405		-	0.01	-	
		KRC406		-	0.03	-	
	Storage Time	KRC401		-	2.0	-	
		KRC402		-	2.0	-	
		KRC403		-	2.0	-	
		KRC404		-	2.0	-	
		KRC405		-	2.0	-	
		KRC406		-	2.0	-	
	Fall Time	KRC401		-	0.12	-	
		KRC402		-	0.36	-	
		KRC403		-	0.35	-	
		KRC404		-	0.6	-	
		KRC405		-	0.1	-	
		KRC406		-	0.19	-	







KRC401~KRC406

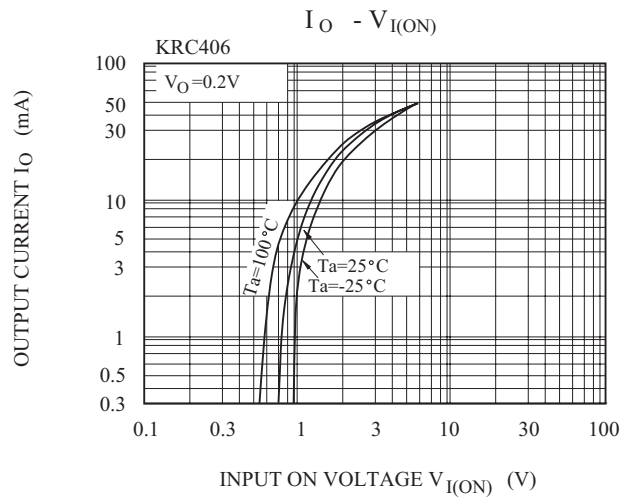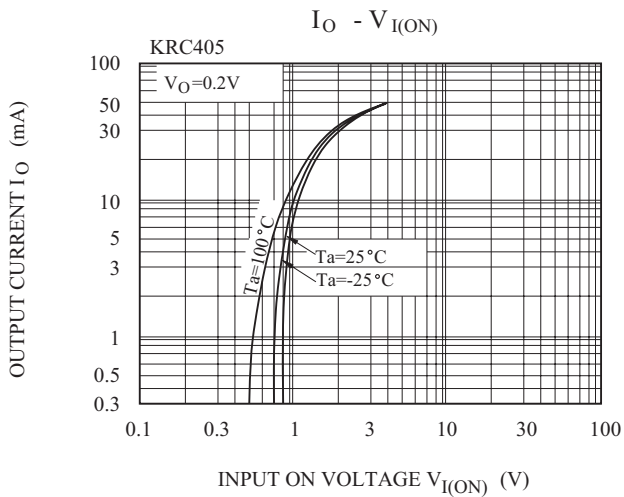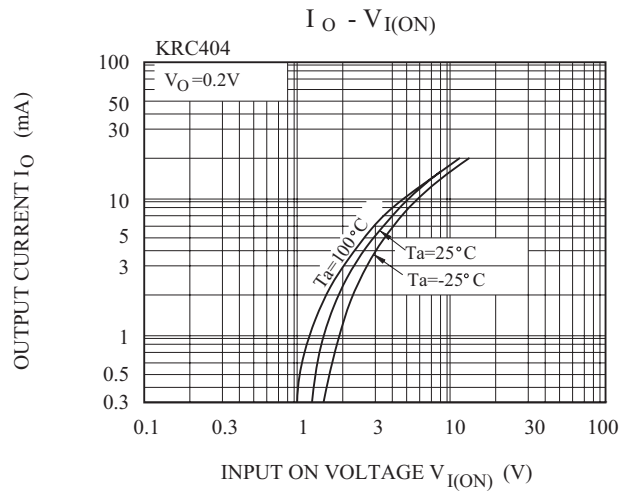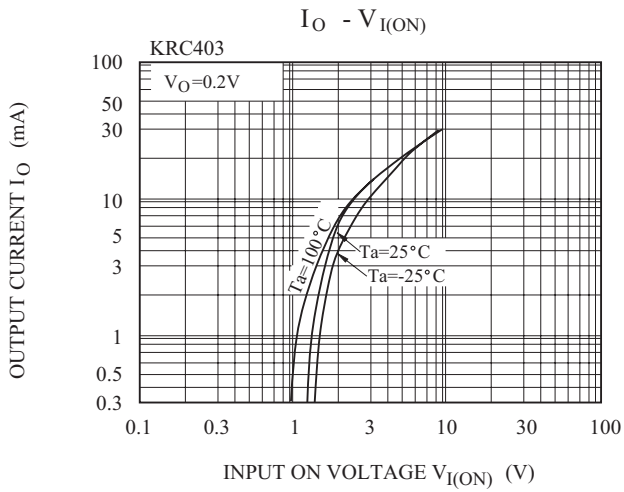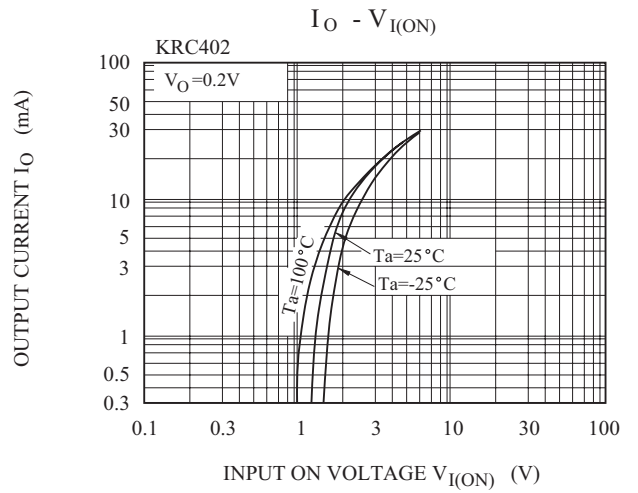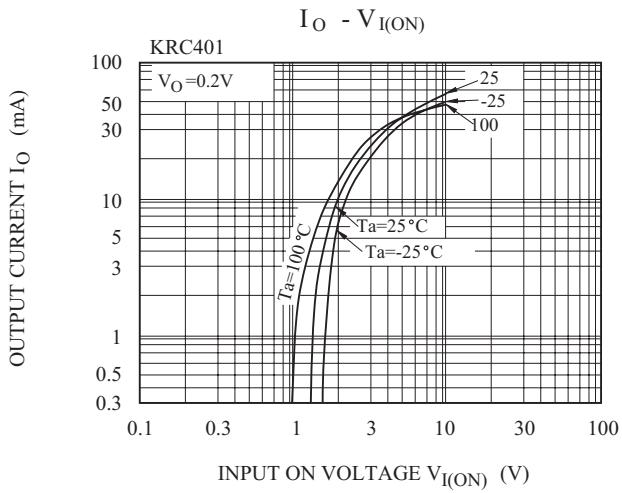

KRC401~KRC406

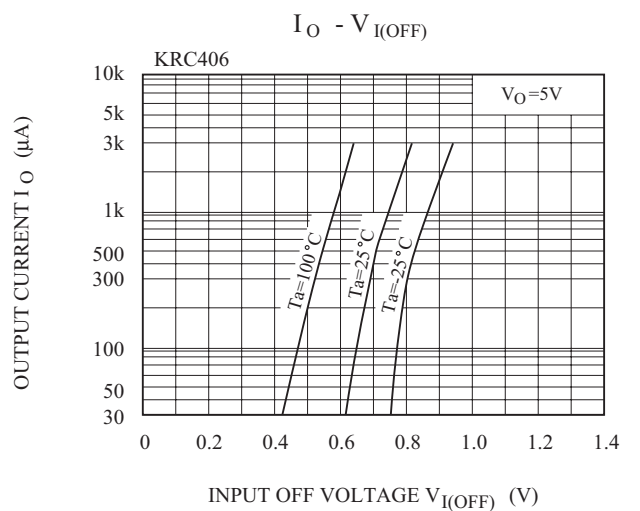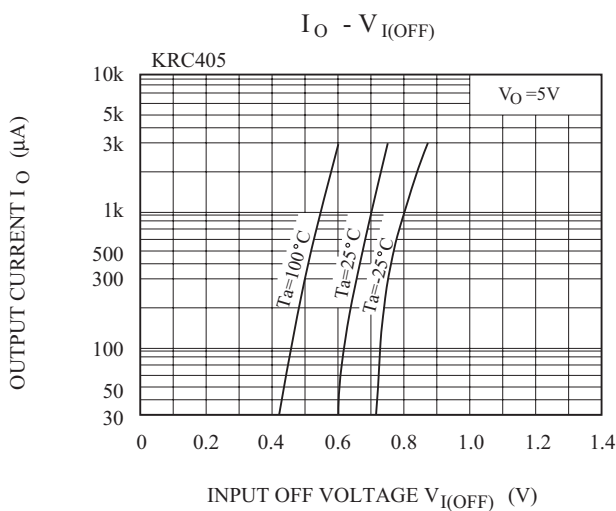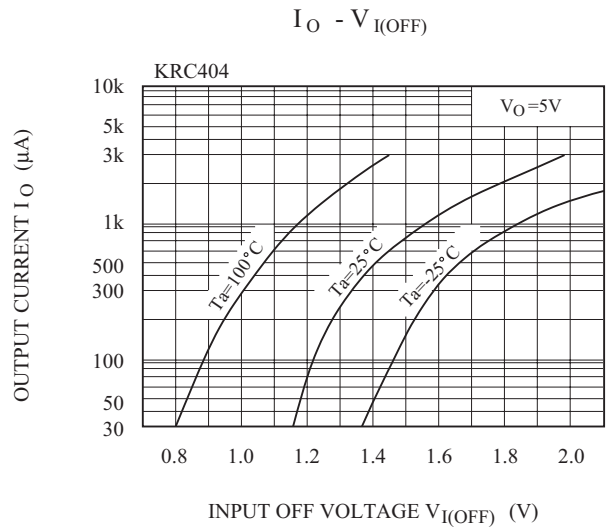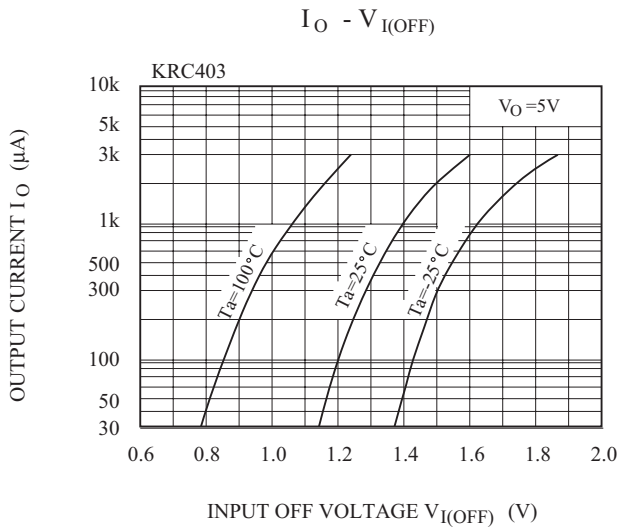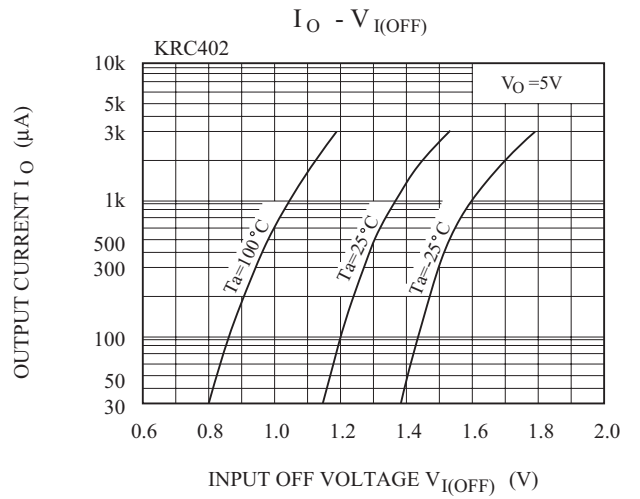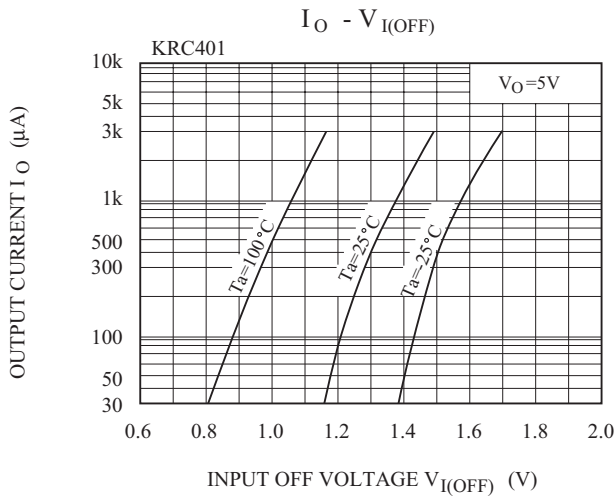

KRC401~KRC406

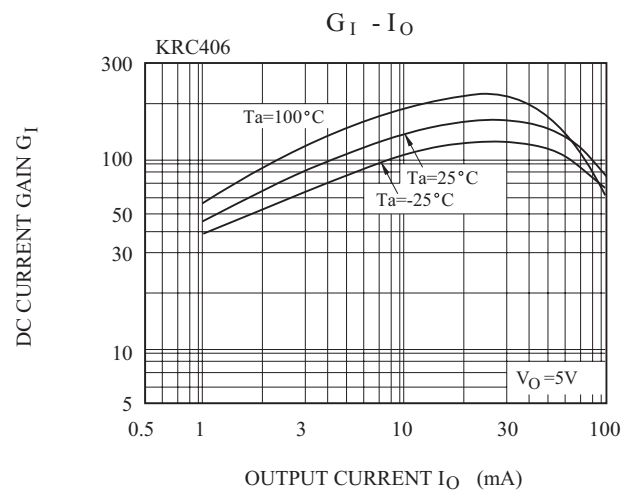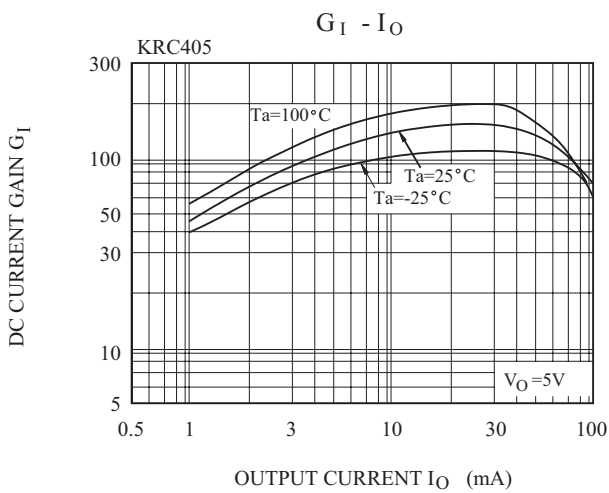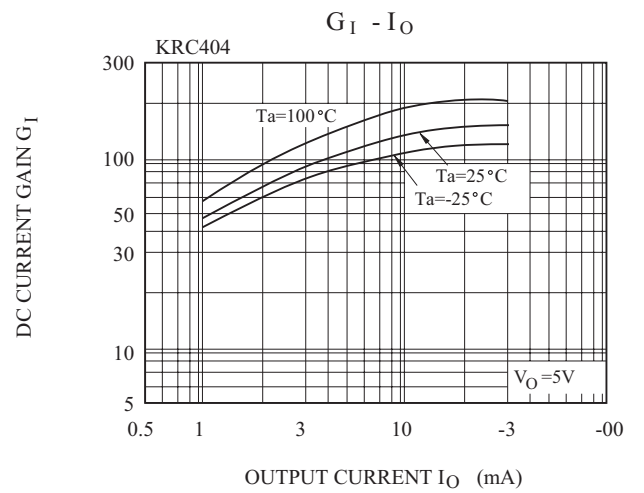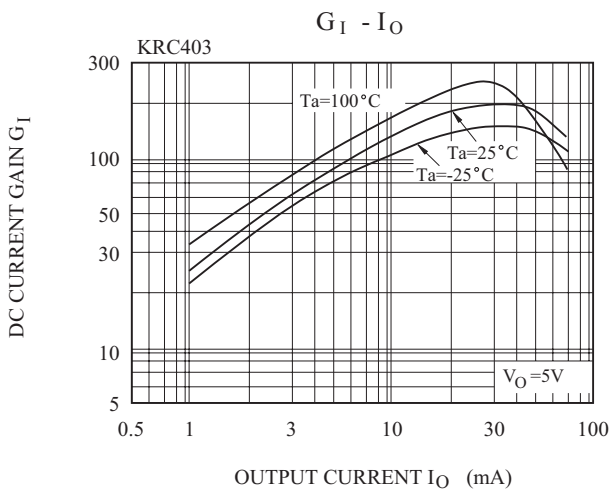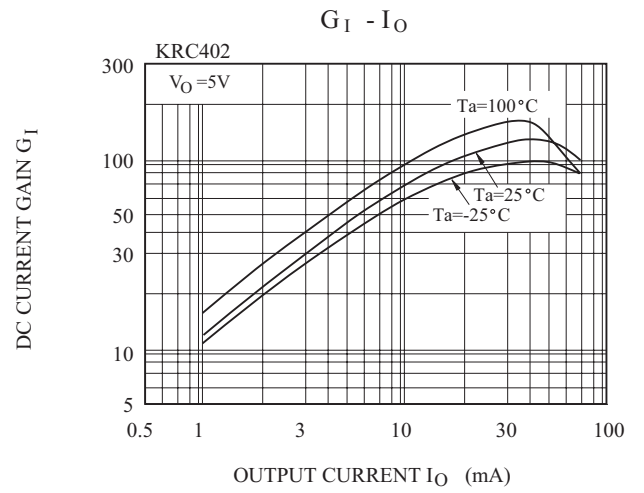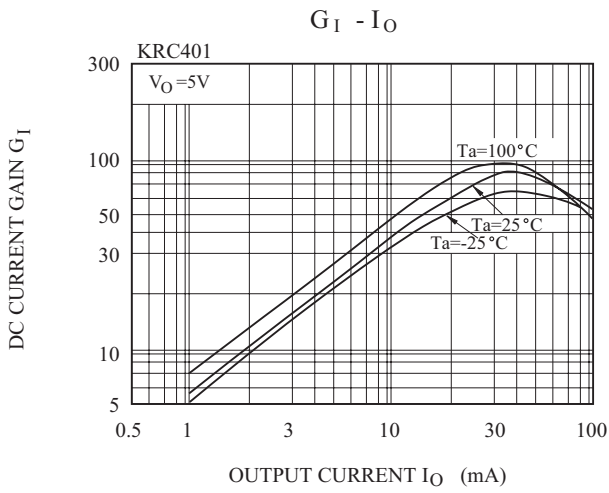

KRC401~KRC406

PRECAUTION ON USING KEC PRODUCTS

1. The products described in this data are intended to be used in general-purpose electronic equipment (Office equipment, telecommunication equipment, measuring equipment, home appliances)
2. When you intend to use these products with equipment or device which require an extremely high of reliability and special applications (such as automobile, air travel aerospace, transportation equipment, life support, system and safety devices) in which special quality and reliability and the failure or malfunction of products may directly jeopardize or harm the human body or damage to property and any application other than the standard application intended, please be sure to consult with our sales representative in advance.
3. On designing your application, please use product within the ranges guaranteed by KEC for maximum rating, operating supply voltage range, heat radiation characteristics and other characteristics. User shall be responsible for failure or damage when used beyond the guaranteed ranges.
4. The technical information described in this data is limited to showing representative characteristics and applied circuit examples of the products and it does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
5. What are described in the data may be changed without any prior notice to reflect new technical development. Please confirm that you have received the latest product standards or specification before final design, purchase or use.
6. Although KEC is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. KEC shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by KEC.