


POWER AMPLIFIER APPLICATION.
POWER SWITCHING APPLICATION.

FEATURES

- Low Collector Saturation Voltage
: $V_{CE(sat)} = -0.5V(\text{Max.}) (I_C = -1A)$
- High Speed Switching Time : $t_{stg} = 1 \mu S(\text{Typ.})$
- Complementary to KTC2814.

MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-50	V
Collector-Emitter Voltage	V_{CEO}	-50	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-2	A
Collector Power Dissipation	P_C	Ta=25 °C	1.5
		Tc=25 °C	10
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

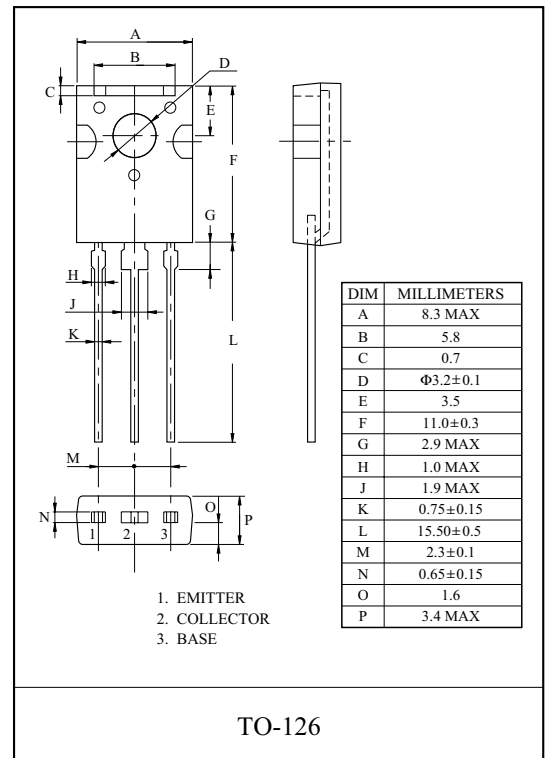


ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT			
Collector Cut-off Current	I_{CBO}	$V_{CB} = -50V, I_E = 0$	-	-	-0.1	μA			
Emitter Cut-off Current	I_{EBO}	$V_{EB} = -5V, I_C = 0$	-	-	-0.1	μA			
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-50	-	-	V			
DC Current Gain	$h_{FE}(1)$ (Note)	$V_{CE} = -2V, I_C = -0.5A$	70	-	240				
	$h_{FE}(2)$	$V_{CE} = -2V, I_C = -1.5A$	40	-	-				
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -1A, I_B = -0.05A$	-	-	-0.5	V			
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = -1A, I_B = -0.05A$	-	-	-1.2	V			
Transition Frequency	f_T	$V_{CE} = -2V, I_C = -0.5A$	-	100	-	MHz			
Collector Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	30	-	pF			
Switching Time	Turn On Time	t_{on}				-	0.1	-	μS
	Storage Time	t_{stg}				-	1.0	-	
	Fall Time	t_f				-	0.1	-	


Note : $h_{FE}(1)$ Classification O:70 ~ 140, Y:120 ~ 240

KTA1715


STATIC CHARACTERISTICS

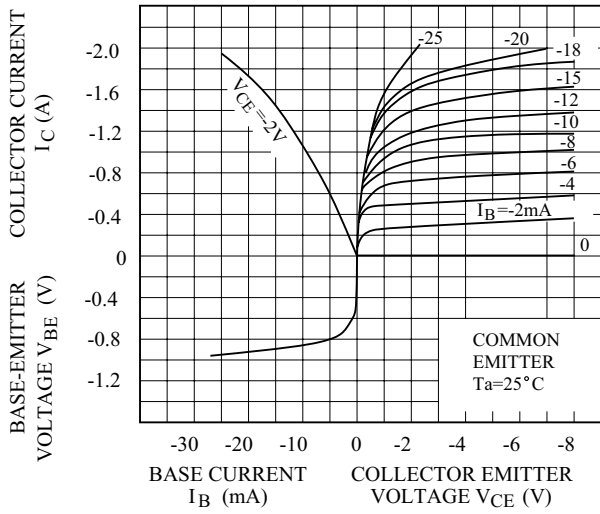


$V_{CE} - I_C$

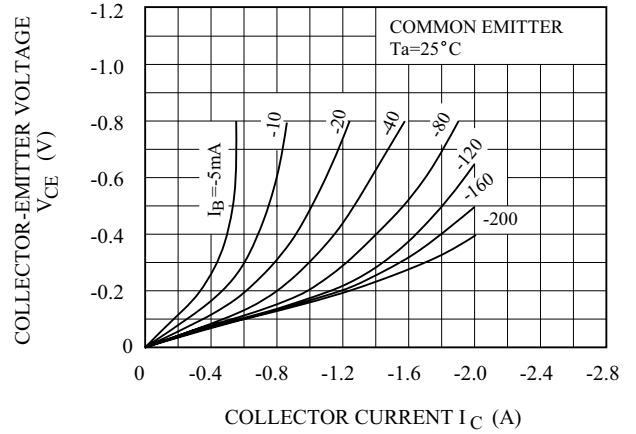


$V_{CE} - I_C$

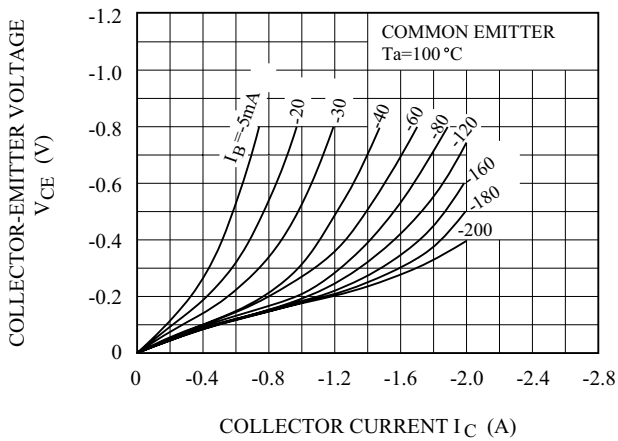

$V_{CE} - I_C$

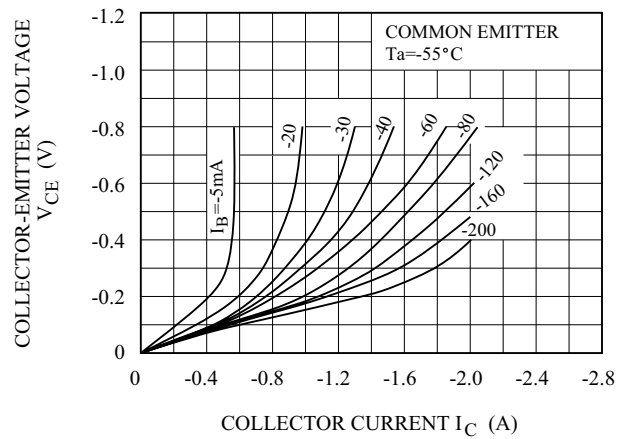

$h_{FE} - I_C$

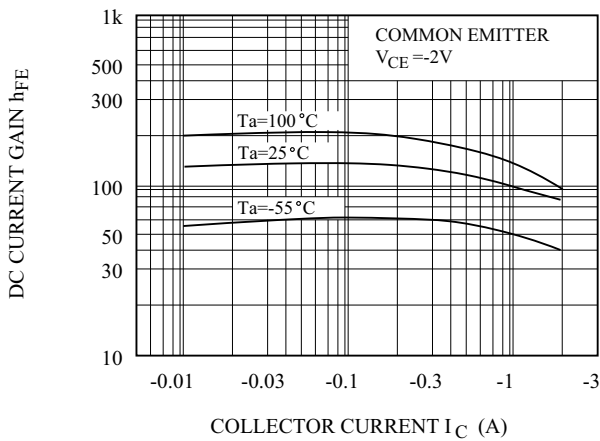

KTA1715

