

isc Silicon PNP Power Transistor

KTB2955

DESCRIPTION



- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = -120V(\text{Min})$
- Complement to Type KTD3055

APPLICATIONS

- High power amplifier applications
- Recommended for 30~35W audio frequency amplifier output stage application.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-120	V
V_{CEO}	Collector-Emitter Voltage	-120	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-10	A
I_B	Base Current	-1	A
P_C	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	40	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~150	$^\circ\text{C}$

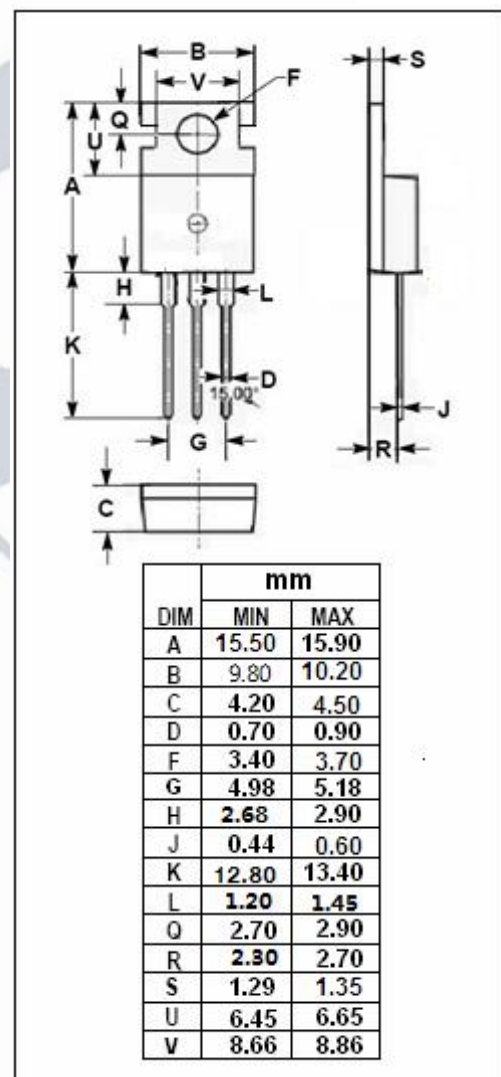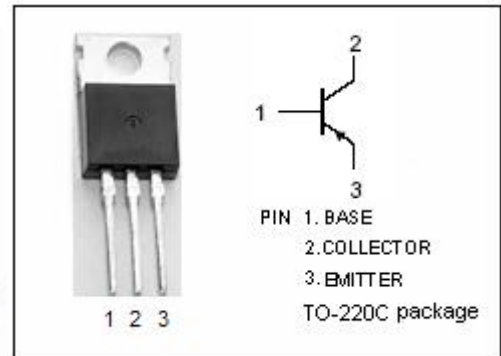

isc Silicon PNP Power Transistor**KTB2955****ELECTRICAL CHARACTERISTICS**T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -50mA ; I _B = 0	-120			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -5A ; I _B = -0.5A			-2.5	V
V _{BE(on)}	Base-Emitter On Voltage	I _C = -5A ; V _{CE} = -5V			-1.5	V
I _{CB}	Collector Cutoff Current	V _{CB} = -120V ; I _E = 0			-10	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = -5V ; I _C =0			-10	μ A
h _{FE}	DC Current Gain	I _C = -1A ; V _{CE} = -5V	55		160	
C _{OB}	Output Capacitance	I _E = 0 ; V _{CB} = 10V ; f _{test} = 1MHz		280		pF
f _T	Current Gain-Bandwidth Product	I _C = -1A ; V _{CE} = -5V		10		MHz

◆ **h_{FE} Classifications**

R	O
55-110	80-160