


GENERAL PURPOSE APPLICATION.  
SWITCHING APPLICATION.

#### FEATURE

- High DC Current Gain :  $h_{FE}=600 \sim 3600$ .
- Small Package.

#### MAXIMUM RATING (Ta=25 °C)







CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	50	V
Collector-Emitter Voltage	$V_{CEO}$	50	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	150	mA
Base Current	$I_B$	30	mA
Collector Power Dissipation	$P_C$	400	mW
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 ~ 150	

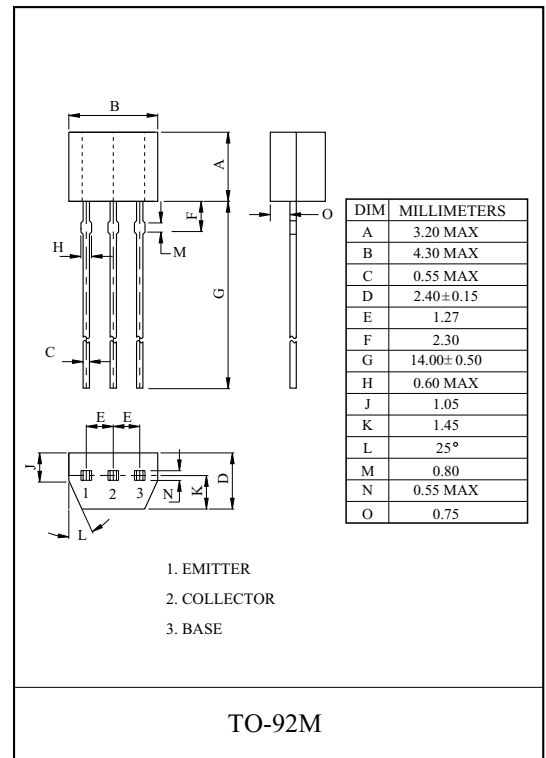



#### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=50V, I_E=0$	-	-	0.1	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	0.1	$\mu A$
DC Current Gain	$h_{FE}(\text{Note})$	$V_{CE}=6V, I_C=2mA$	600	-	3600	
Collector- Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=10mA$	-	0.12	0.25	V
Transition Frequency	$f_T$	$V_{CE}=10V, I_C=10mA$	100	250	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	3.5	-	pF
Noise Figure	NF(1)	$V_{CE}=6V, I_C=0.1mA, f=100Hz, R_g=10k$	-	0.5	-	dB
	NF(2)	$V_{CE}=6V, I_C=0.1mA, f=1kHz, R_g=10k$	-	0.3	-	dB

Note:  $h_{FE}$  Classification A:600 1800 , B:1200 3600

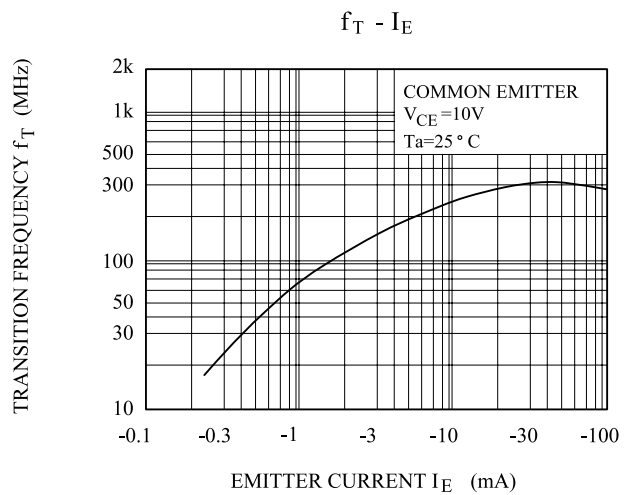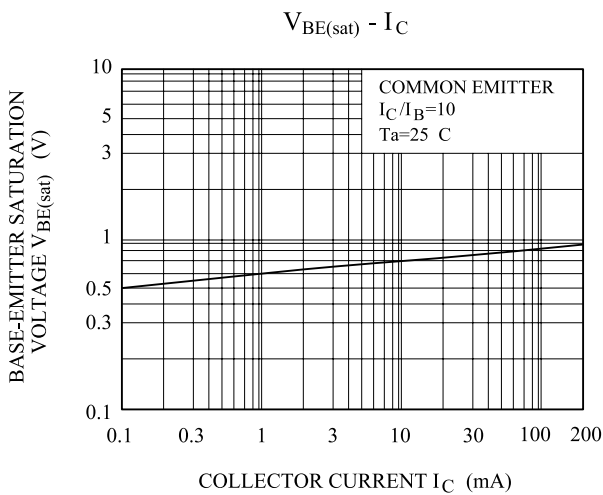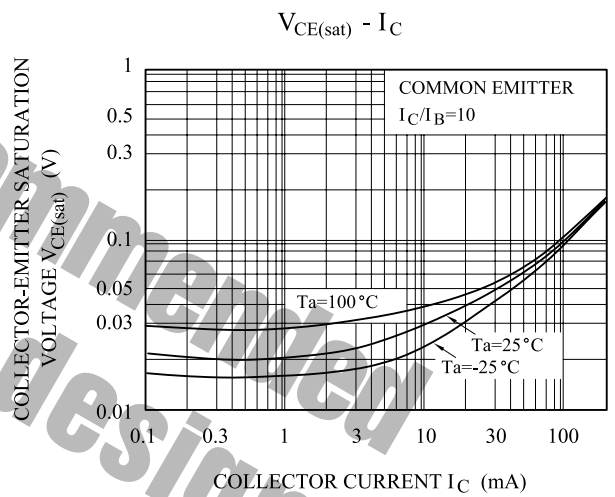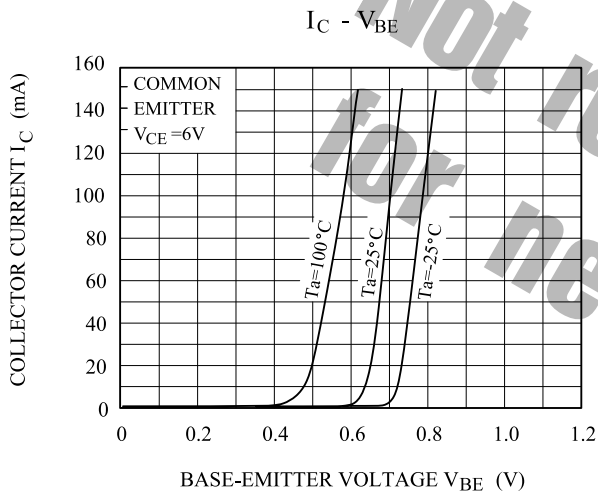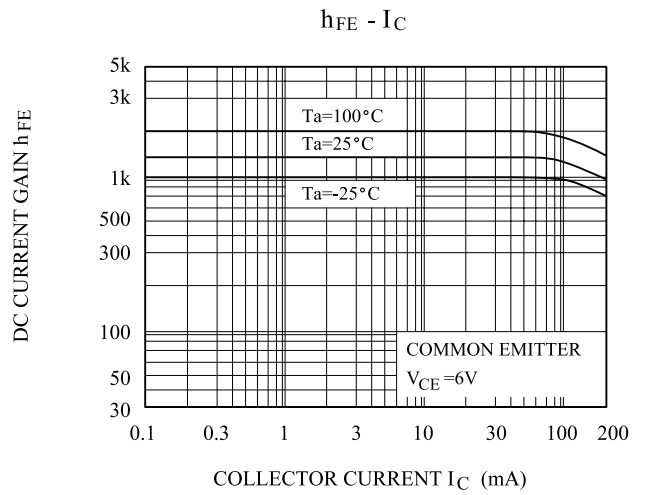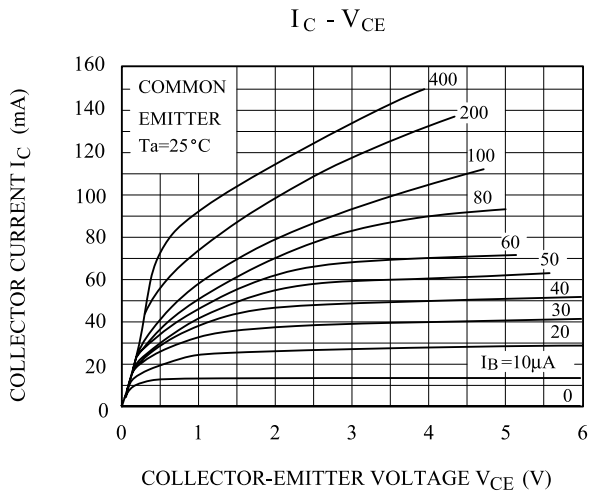

# KTC3113

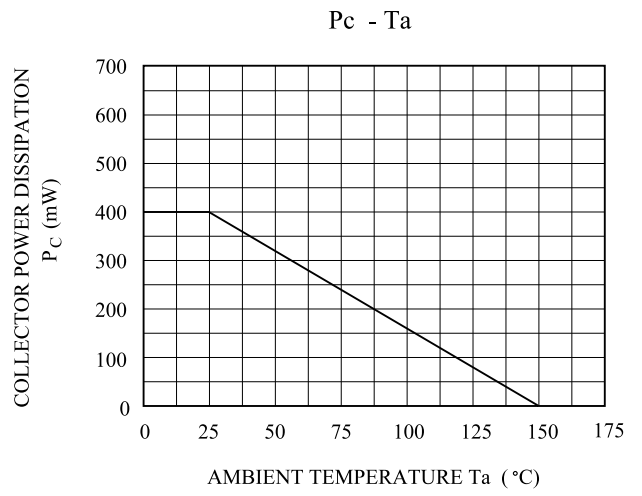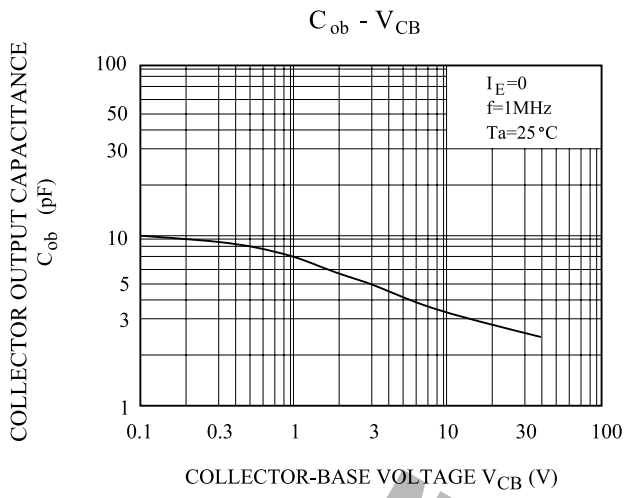

**Not recommended  
for new design**