

RELAY DRIVERS, LAMP DRIVERS,
MOTOR DRIVERS APPLICATION.

FEATURES

- Adoption of MBIT Processes.
- Large Current Capacitance.
- Low Collector-to-Emitter Saturation Voltage.
- High-Speed Switching.
- Ultrasmall Package Facilitates Miniaturization in end Products.
- High Allowable Power Dissipation.
- Complementary to KTA1532T



MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	20	V
Collector-Emitter Voltage		V_{CEO}	20	V
Emitter-Base Voltage		V_{EBO}	5	V
Collector Current	DC	I_C	1.5	A
	Pulse	I_{CP}	3	A
Base Current		I_B	300	mA
Collector Power Dissipation		P_C^*	0.9	W
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55 ~ 150	°C


* Package mounted on a ceramic board (600mm² × 0.8mm)







ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=12V, I_E=0$	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=4V, I_C=0$	-	-	0.1	μA
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	20	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	20	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	5	-	-	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=750mA, I_B=15mA$	-	130	200	mV
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=750mA, I_B=15mA$	-	0.85	1.2	V
DC Current Gain	h_{FE}	$V_{CE}=2V, I_C=100mA$	200	-	560	
Transition Frequency	f_T	$V_{CE}=2V, I_C=300mA$	-	210	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, f=1MHz$	-	20	-	pF
Switching Time	Turn-On Time	t_{on}	-	40	-	nS
	Storage Time	t_{stg}	-	180	-	
	Fall Time	t_f	-	20	-	

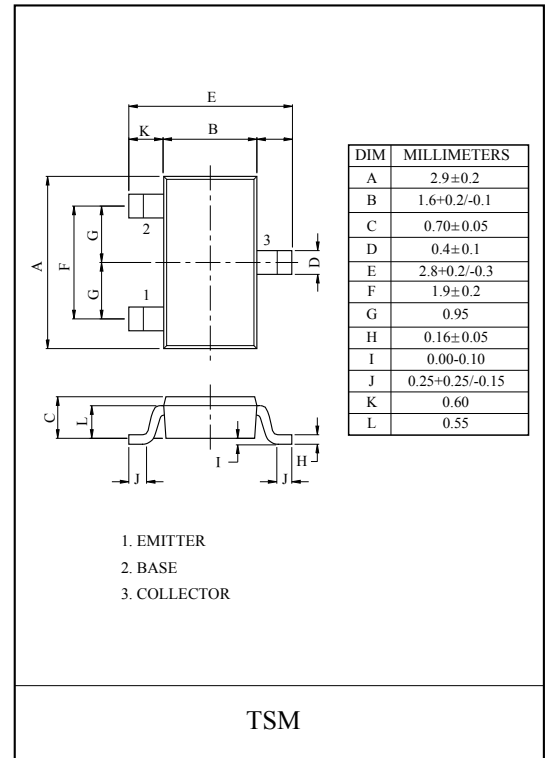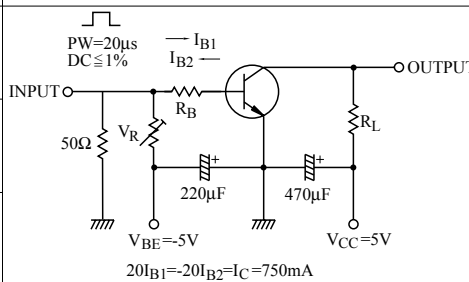


Marking

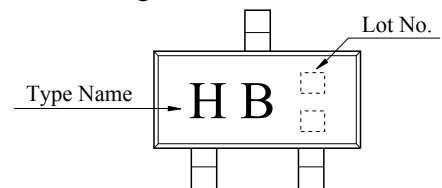


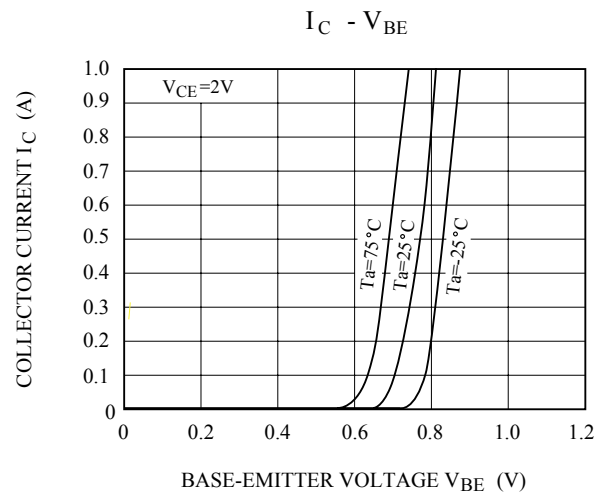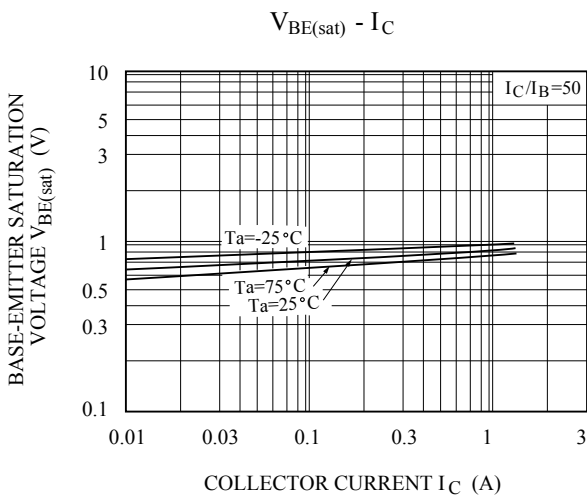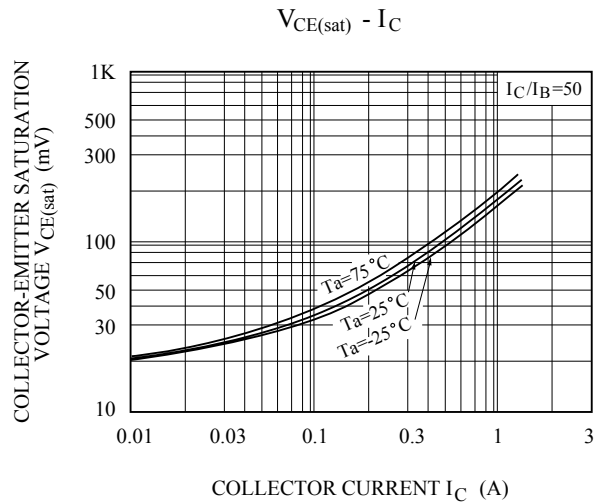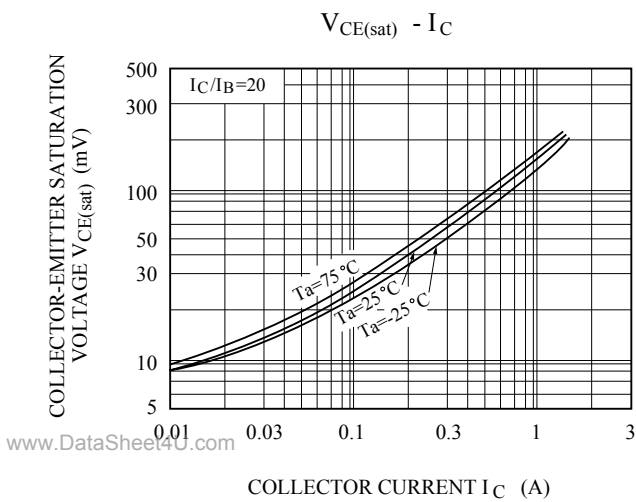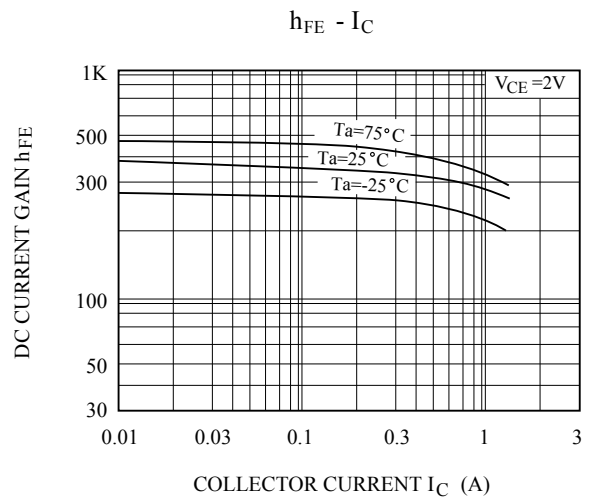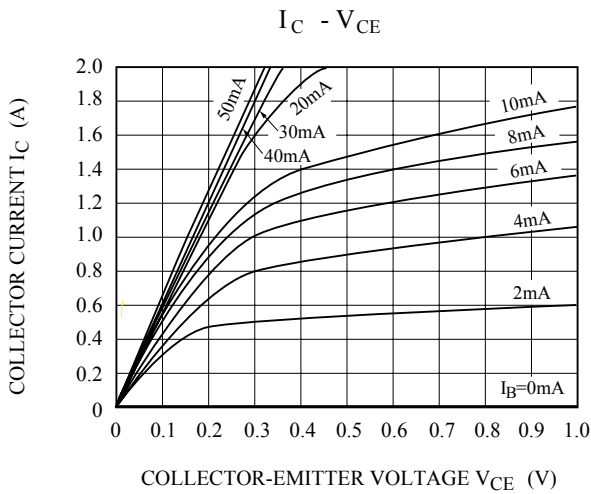


$f_T - I_C$

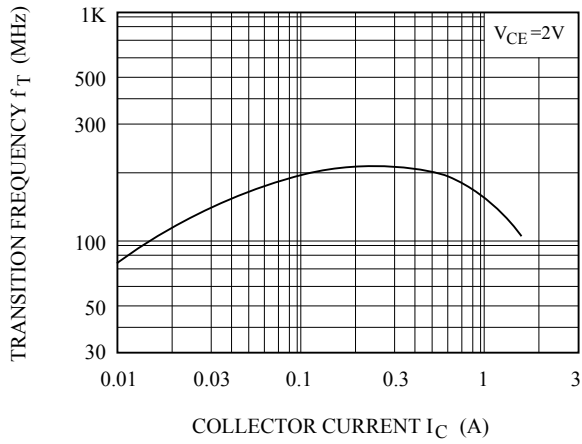

$C_{ob} - V_{CB}$

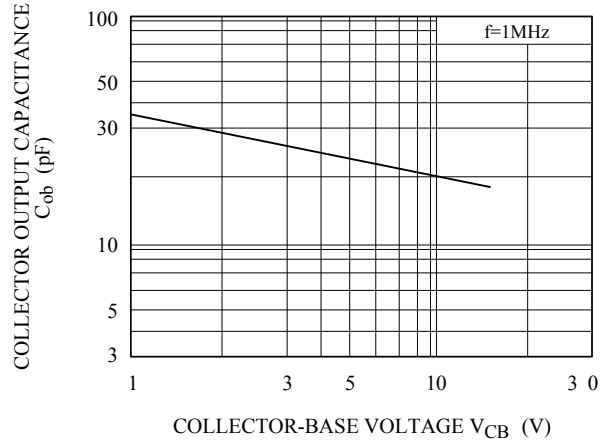

SAFE OPERATING AREA

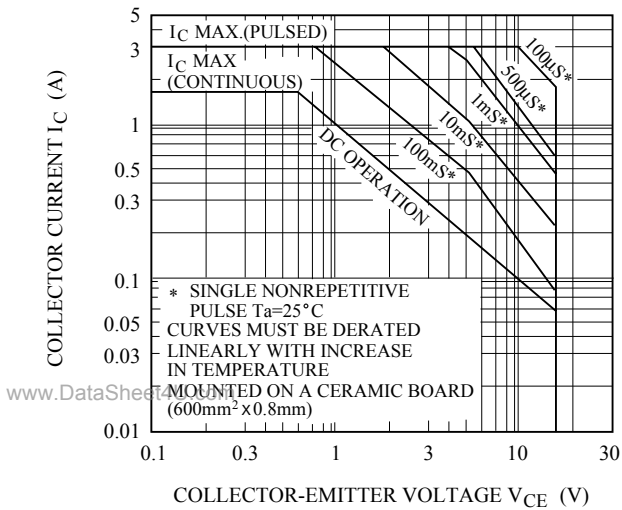

$P_c - T_a$

