

## Visible Light Sensing Photo Diode(a-Si) KVS-1001-P1

### Description

The KVS-1001-P1 is high sensitive visible light sensor which KVS-1001(a-Si) and zenor diode combined in one PCB.  
ESD is improved remarkably, minium 10kV for HBM.


### Features

- High Sensitivity in a visible area, but little Sensitivity in Others (UV and IR)
- Environment friendly Product (not contain Cadmium)
- Improved ESD Minium 10kV for HBM



### Outline Dimensions


unit = mm

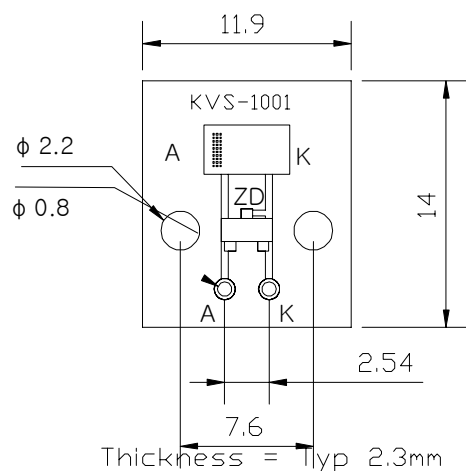

### Application

- Brightness Detection of CRT, LCD
- Beam Position Detection of Projection TV
- Replace for CdS cell
- Control of the Lighting in a Car, Room, etc

### Spectral sensitivity

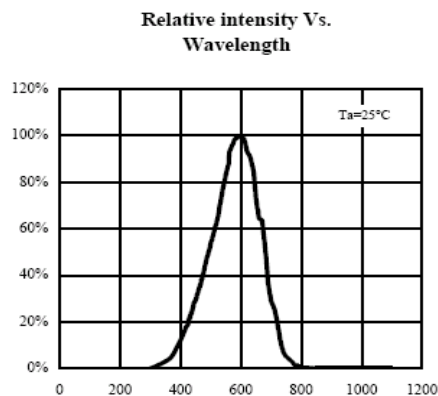

### Characteristics

[Ta= 25 °C]

Description	Symbol	Condition	Min.	Typ.	Max.	Unit
Open circuit voltage	Voc	Ev= FL 100lx *1	0.35	0.40	-	V
Short circuit current	Ish		0.35	0.39	-	uA
Dark current	ID	VR=1V	-	0.5	5	nA
Spectral sensitivity	$\lambda$	5 ~ 10%	350~750			nm
Peak Wavelength	$\lambda_p$		-	590	-	nm

\*1. Normal White Fluorescent Light