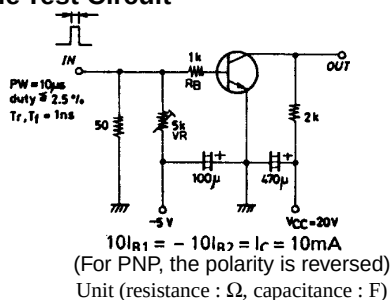


**SANYO****2SA1331/2SC3361****High-Speed Switching Applications****Features**

- Fast switching speed.
- High breakdown voltage.
- Small-sized package permitting the 2SA1331/2SC3361-applied sets to be made small and slim.

**Switching Time Test Circuit**

() : 2SA1331

**Specifications****Absolute Maximum Ratings at  $T_a = 25^\circ\text{C}$** 

| Parameter                    | Symbol    | Conditions | Ratings     | Unit             |
|------------------------------|-----------|------------|-------------|------------------|
| Collector-to-Base Voltage    | $V_{CBO}$ |            | (-)60       | V                |
| Collector-to-Emitter Voltage | $V_{CEO}$ |            | (-)50       | V                |
| Emitter-to-Base Voltage      | $V_{EBO}$ |            | (-)5        | V                |
| Collector Current            | $I_C$     |            | (-)150      | mA               |
| Collector Current (Pulse)    | $I_{CP}$  |            | (-)400      | mA               |
| Base Current                 | $I_B$     |            | (-)40       | mA               |
| Collector Dissipation        | $P_C$     |            | 150         | mW               |
| Junction Temperature         | $T_J$     |            | 125         | $^\circ\text{C}$ |
| Storage Temperature          | $T_{stg}$ |            | -55 to +125 | $^\circ\text{C}$ |

**Electrical Characteristics at  $T_a = 25^\circ\text{C}$** 

| Parameter                               | Symbol        | Conditions                               | Ratings |              |        | Unit          |
|-----------------------------------------|---------------|------------------------------------------|---------|--------------|--------|---------------|
|                                         |               |                                          | min     | typ          | max    |               |
| Collector Cutoff Current                | $I_{CBO}$     | $V_{CB}=(-)40\text{V}, I_E=0$            |         |              | (-)0.1 | $\mu\text{A}$ |
| Emitter Cutoff Current                  | $I_{EBO}$     | $V_{EB}=(-)4\text{V}, I_C=0$             |         |              | (-)0.1 | $\mu\text{A}$ |
| DC Current Gain                         | $h_{FE}$      | $V_{CE}=(-)6\text{V}, I_C=(-)1\text{mA}$ | 90*     |              | 400*   |               |
| Gain-Bandwidth Product                  | $f_T$         | $V_{CE}=(-)6\text{V}, I_C=(-)1\text{mA}$ |         | 100          |        | MHz           |
| Common Base Output Capacitance          | $C_{ob}$      | $V_{CB}=(-)6\text{V}, f=1\text{MHz}$     |         | (3.5)<br>2.7 |        | pF            |
| Collector-to-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C=(-)10\text{mA}, I_B=(-)1\text{mA}$  |         | (-)0.1       | (-)0.4 | V             |
| Base-to-Emitter Saturation Voltage      | $V_{BE(sat)}$ | $I_C=(-)10\text{mA}, I_B=(-)1\text{mA}$  |         | (-)0.75      | (-)1.1 | V             |
| Collector-to-Base Breakdown Voltage     | $V_{(BR)CBO}$ | $I_C=(-)10\mu\text{A}, I_E=0$            | (-)60   |              |        | V             |
| Collector-to-Emitter Breakdown Voltage  | $V_{(BR)CEO}$ | $I_C=(-)1\text{mA}, R_{BE}=\infty$       | (-)50   |              |        | V             |
| Emitter-to-Base Breakdown Voltage       | $V_{(BR)EBO}$ | $I_E=(-)10\mu\text{A}, I_C=0$            | (-)5    |              |        | V             |
| Delay Time                              | $t_d$         | See specified Test Circuit               |         | 40           |        | ns            |
| Rise Time                               | $t_r$         | See specified Test Circuit               |         | (120)<br>80  |        | ns            |
| Storage Time                            | $t_{stg}$     | See specified Test Circuit               |         | (190)<br>230 |        | ns            |
| Fall Time                               | $t_f$         | See specified Test Circuit               |         | (200)<br>160 |        | ns            |

\* : The 2SA1331/2SC3361 are classified by 1mA  $h_{FE}$  as follows :

|    |   |     |     |   |     |     |   |     |
|----|---|-----|-----|---|-----|-----|---|-----|
| 90 | 4 | 180 | 135 | 5 | 270 | 200 | 6 | 400 |
|----|---|-----|-----|---|-----|-----|---|-----|









Marking 2SA1331 : O, 2SC3361 : S

 $h_{FE}$  rank : 4, 5, 6**SANYO Electric Co.,Ltd. Semiconductor Business Headquarters**








TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

71598HA (KT)/7139MO, TS No.3217-1/4

# 2SA1331/2SC3361

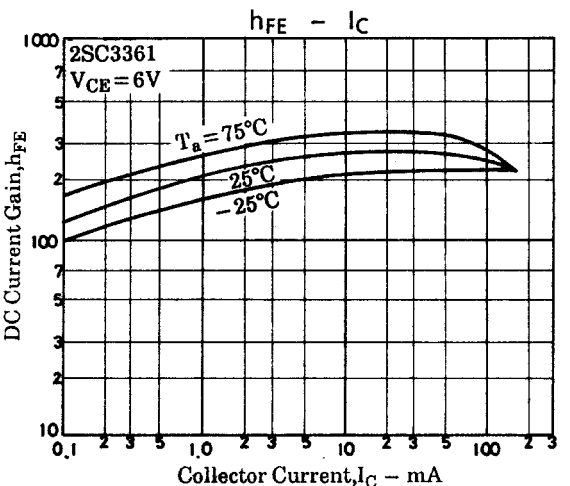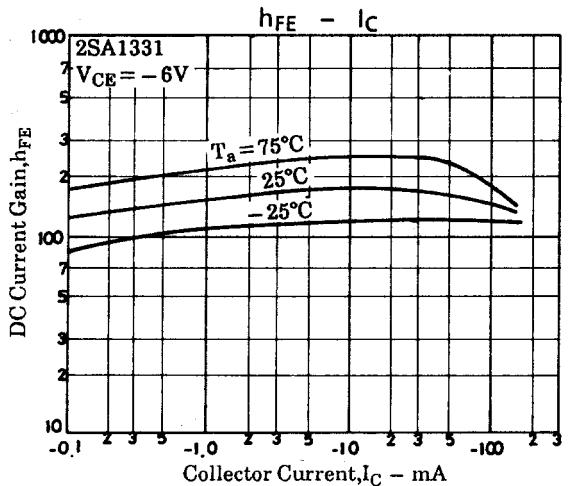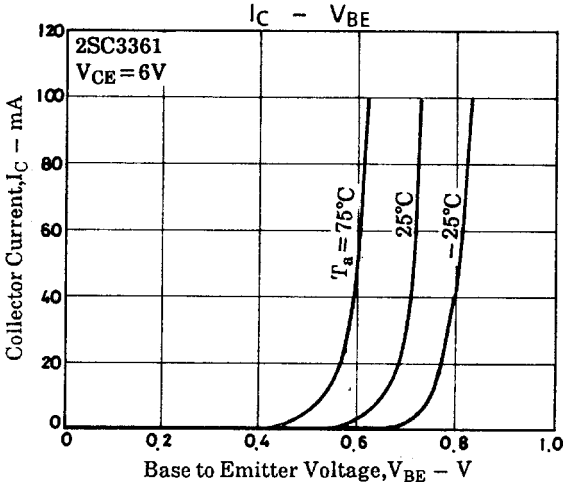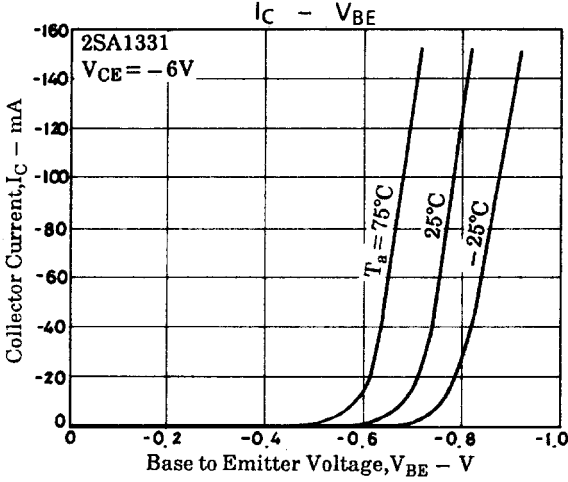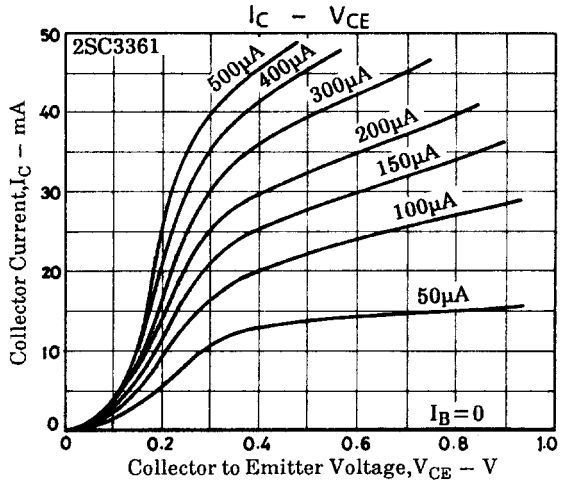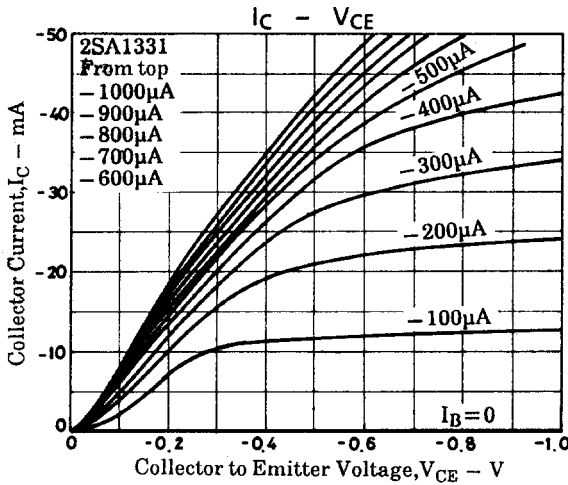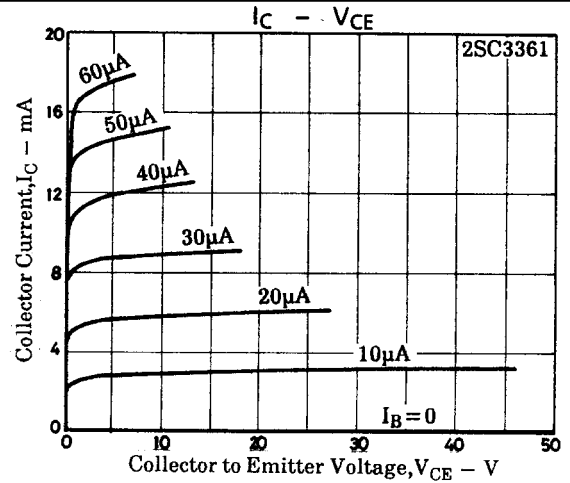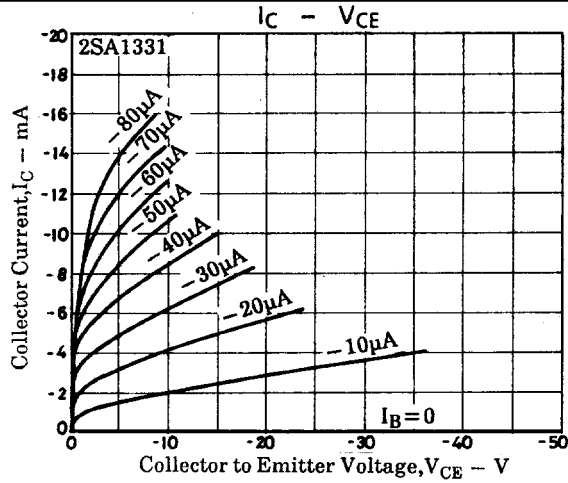

# 2SA1331/2SC3361

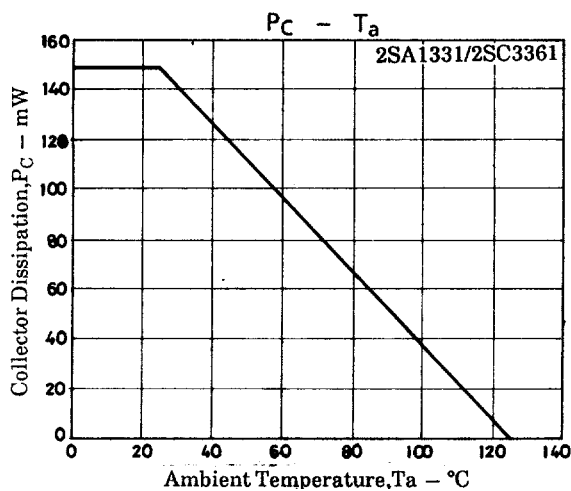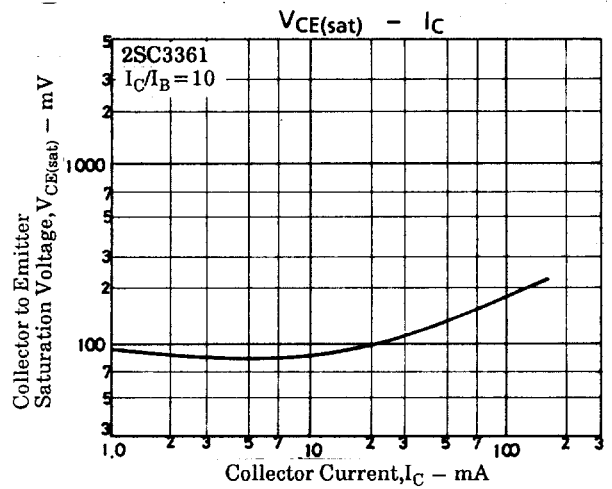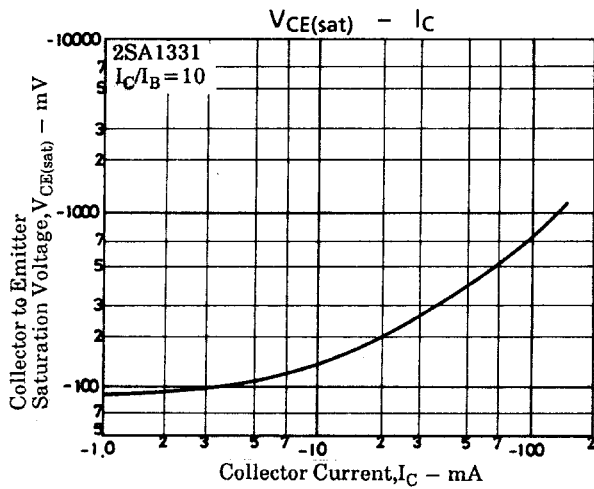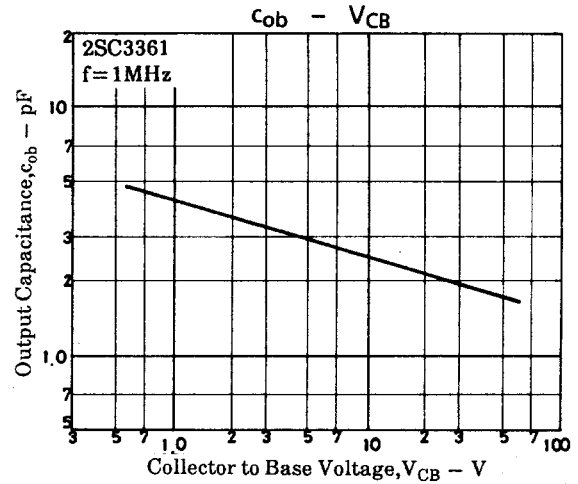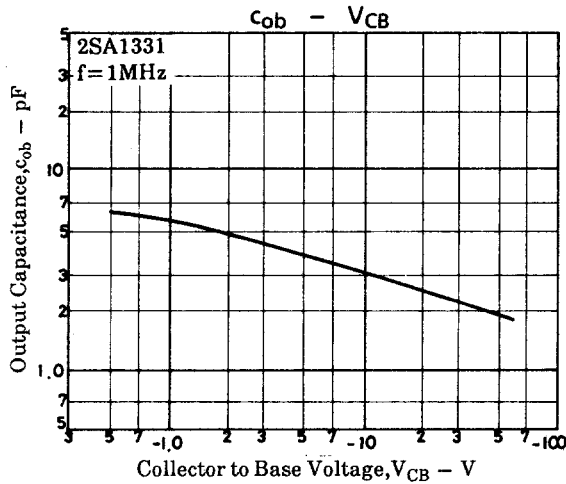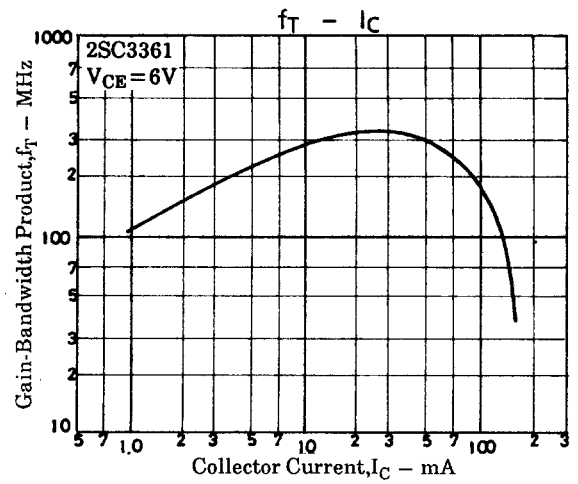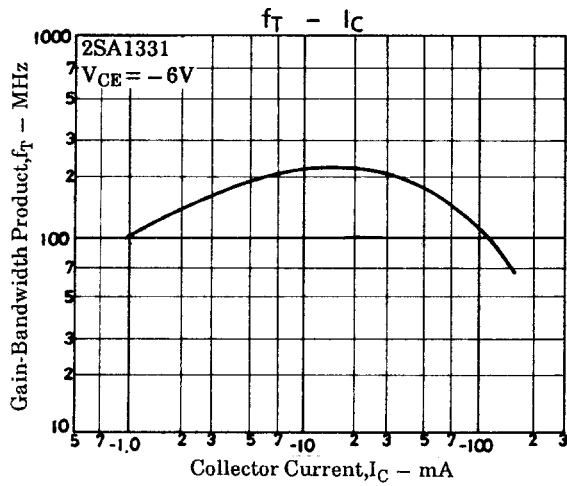

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 1998. Specifications and information herein are subject to change without notice.