

Bias Resistor Transistor

PNP Silicon Surface Mount Transistor with Monolithic Bias Resistor Network

LDTA124GLT1G



- Applications

Inverter, Interface, Driver

- Features

- 1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
 - 2) The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
 - 3) Only the on/off conditions need to be set for operation, making the device design easy.
- We declare that the material of product compliance with RoHS requirements.

- Absolute maximum ratings (Ta=25°C)

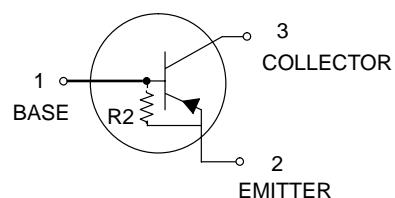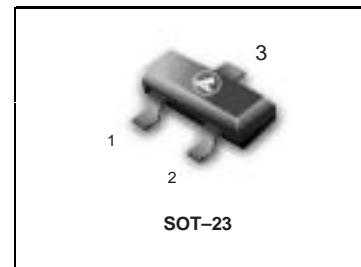

Parameter	Symbol	Limits	Unit
Collector-base voltage	V _{CBO}	-50	V
Collector-emitter voltage	V _{C EO}	-50	V
Emitter-base voltage	V _{EBO}	-5	V
Collector current	I _C	-100	mA
Collector power dissipation	P _C	200	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

DEVICE MARKING AND RESISTOR VALUES

Device	Marking	R1 (K)	R2 (K)	Shipping
LDTA124GLT1G	Q2	-	22	3000/Tape & Reel
LDTA124GLT3G	Q2	-	22	10000/Tape & Reel

- Electrical characteristics (T = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV _{CBO}	-50	-	-	V	I _C = -50μA
Collector-emitter breakdown voltage	BV _{C EO}	-50	-	-	V	I _C = -1mA
Emitter-base breakdown voltage	BV _{EBO}	-5	-	-	V	I _E = -330μA
Collector cutoff current	I _{CBO}	-	-	-0.5	μA	V _{CB} = -50V
Emitter cutoff current	I _{EBO}	-140	-	-260	μA	V _{EB} = -4V
Collector-emitter saturation voltage	V _{C E(sat)}	-	-	-0.3	V	I _C = -10mA , I _E = -0.5mA
DC current transfer ratio	h _{FE}	56	-	-	-	I _C = -5mA , V _{CE} = -5V
Emitter-base resistance	R ₂	15.4	22	28.6	kΩ	-
Transition frequency	f _t	-	250	-	MHz	V _{CE} = -10V , I _E = 5mA , f= 100MHz *

* Transition frequency of the device.

LDTA124GLT1G

●Electrical characteristic curves

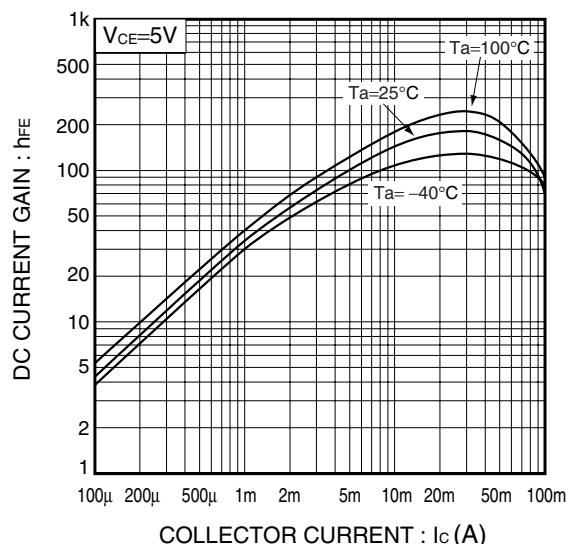


Fig.1 DC current gain
vs. Collector current

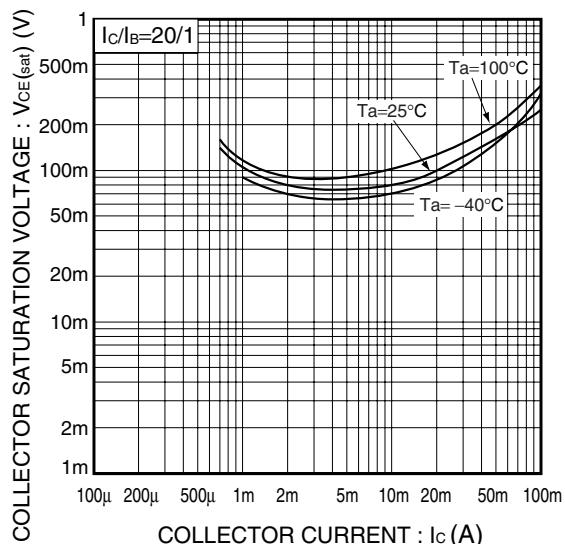
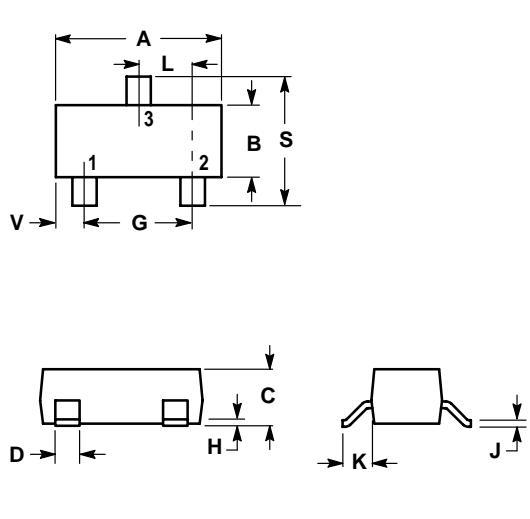


Fig.2 Collector-Emitter saturation voltage
vs. Collector current

LDTA124GLT1G
SOT-23

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M,1982
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0040	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0140	0.0285	0.35	0.69
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.1039	2.10	2.64
V	0.0177	0.0236	0.45	0.60

