

**Silicon NPN Power Transistors**

**2SC3528**

**DESCRIPTION**

- With TO-3PFa package
- High collector current
- Low saturation voltage

**APPLICATIONS**

- For high voltatge ,high speed power switching applications

**PINNING(see Fig.2)**

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

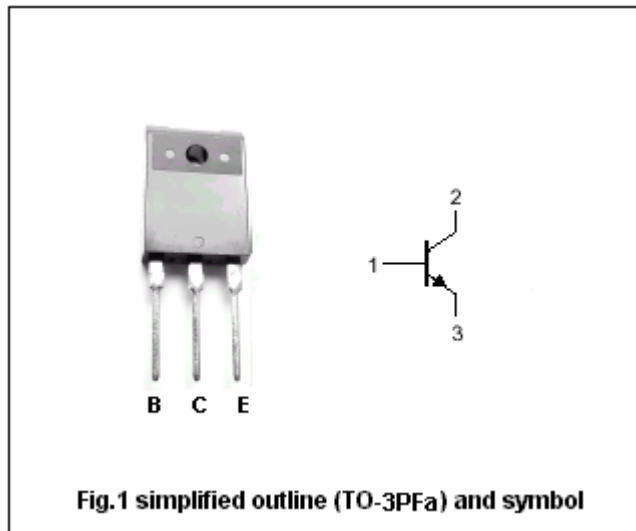


Fig.1 simplified outline (TO-3PFa) and symbol

**ABSOLUTE MAXIMUM RATINGS( $T_C=25^\circ C$ )**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	Open emitter	500	V
$V_{CEO}$	Collector-emitter voltage	Open base	400	V
$V_{EBO}$	Emitter-base voltage	Open collector	7	V
$I_C$	Collector current		20	A
$I_{CP}$	Collector current-peak		30	A
$I_B$	Base current		6	A
$P_C$	Collector power dissipation	$T_C=25^\circ C$	125	W
		$T_a=25^\circ C$	3	
$T_j$	Junction temperature		150	$^\circ C$
$T_{stg}$	Storage temperature		-55~150	$^\circ C$

## Silicon NPN Power Transistors

## 2SC3528

## CHARACTERISTICS

T<sub>j</sub>=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEO(SUS)</sub>	Collector-emitter sustaining voltage	I <sub>C</sub> =0.5A ; L=25mH	400			V
V <sub>CE(sat)</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =10A; I <sub>B</sub> =2A			1.0	V
V <sub>BE(sat)</sub>	Base-emitter saturation voltage	I <sub>C</sub> =10A; I <sub>B</sub> =2A			1.5	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =500V; I <sub>E</sub> =0			0.1	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =7V; I <sub>C</sub> =0			0.1	mA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =2A ; V <sub>CE</sub> =5V	15			
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =10A ; V <sub>CE</sub> =5V	10			
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =1A ; V <sub>CE</sub> =10V; f=1.0MHz		15		MHz

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =10A; I <sub>B1</sub> =-I <sub>B2</sub> =2.0A V <sub>CC</sub> =125V			1.0	μs
t <sub>s</sub>	Storage time				2.5	μs
t <sub>f</sub>	Fall time				1.0	μs

Silicon NPN Power Transistors

2SC3528

PACKAGE OUTLINE



Fig.2 outline dimensions (unindicated tolerance:±0.3mm)