

## 52 kHz Simple 3A Buck Regulator

### Features

- 3.3V, 5V, 12V, and Adjustable Output Versions
- Voltage over Specified Line and Load Conditions:
  - Fixed Version:  $\pm 3\%$  Max. Output Voltage
  - Adjustable Version:  $\pm 2\%$  Max. Feedback Voltage
- Specified 3A Output Current
- Wide Input Voltage Range of 4V to 40V
- Wide Output Voltage Range of 1.23V to 37V
- Requires Only Four External Components
- 52 kHz Fixed-Frequency Internal Oscillator
- Low Power Standby Mode  $I_Q$  Typically  $< 200 \mu A$
- 80% Efficiency (Adjustable Version Typically  $> 80\%$ )
- Uses Readily Available Standard Inductors
- Thermal Shutdown and Current Limit Protection
- 100% Electrical Thermal Limit Built-In

### Applications

- Simple High-Efficiency Step-Down (Buck) Regulator
- Efficient Pre-Regulator for Linear Regulators
- On-Card Switching Regulators
- Positive and Negative Converter (Inverting Buck-Boost)
- Isolated Flyback Converter using Minimum Number of External Components
- Negative Boost Converter

### General Description


The LM2576 series of monolithic integrated circuits provide all the active functions for a step-down (buck) switching regulator. Fixed versions are available with a 3.3V, 5V, or 12V fixed output. Adjustable versions have an output voltage range from 1.23V to 37V. Both versions are capable of driving a 3A load with excellent line and load regulation.

These regulators are simple to use because they require a minimum number of external components and include internal frequency compensation and a fixed-frequency oscillator. The LM2576 series offers a high efficiency replacement for popular three-terminal adjustable linear regulators. It substantially reduces the size of the heat sink, and in many cases no heat sink is required.

A standard series of inductors available from several different manufacturers are ideal for use with the LM2576 series. This feature greatly simplifies the design of switch-mode power supplies.


The feedback voltage is guaranteed to  $\pm 2\%$  tolerance for adjustable versions, and the output voltage is guaranteed to  $\pm 3\%$  for fixed versions, within specified input voltages and output load conditions. The oscillator frequency is guaranteed to  $\pm 10\%$ . External shutdown is included, featuring less than  $200 \mu A$  standby current. The output switch includes cycle-by-cycle current limiting and thermal shutdown for full protection under fault conditions.

### Package Types

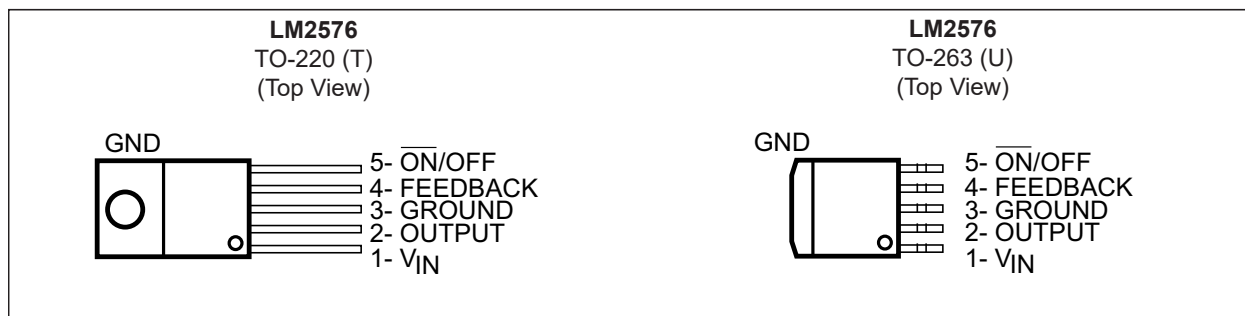


# LM2576

## Typical Application Circuits

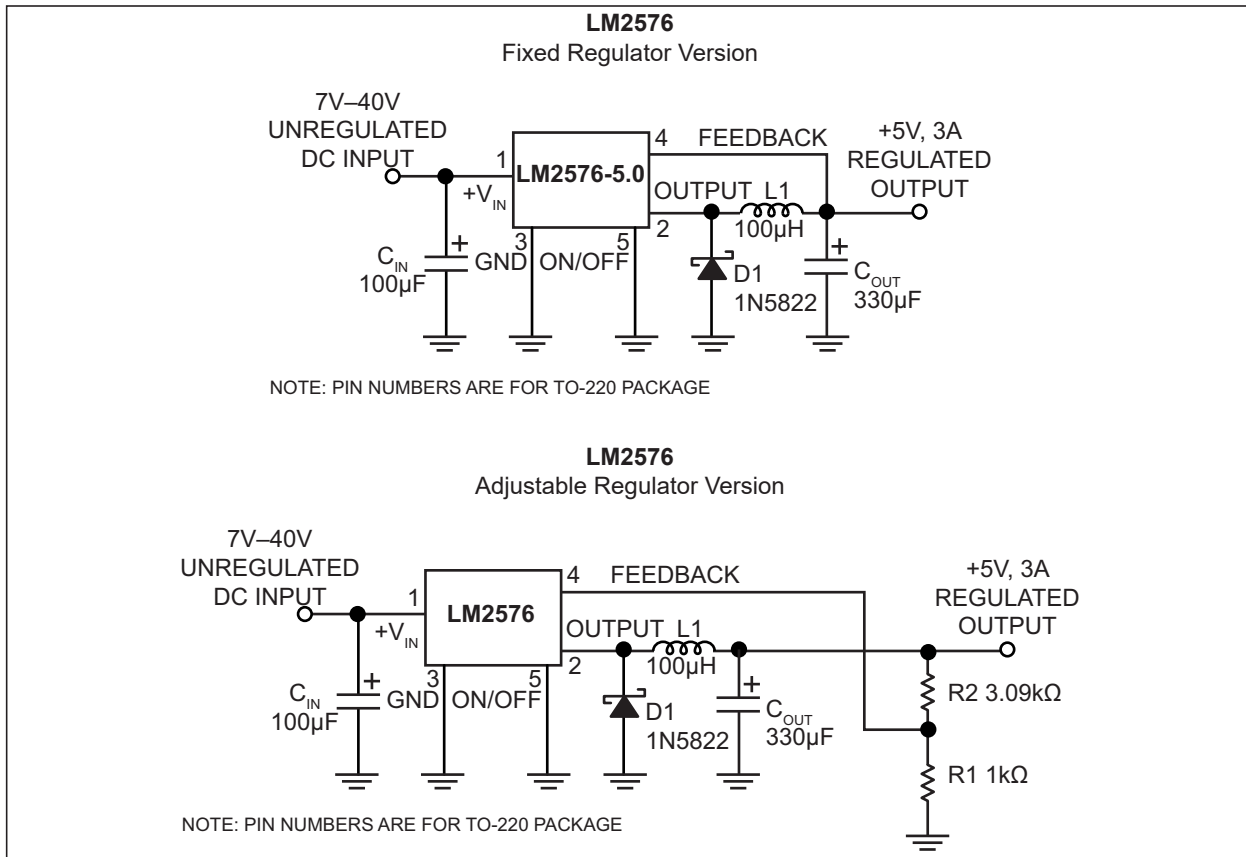

## Functional Block Diagrams

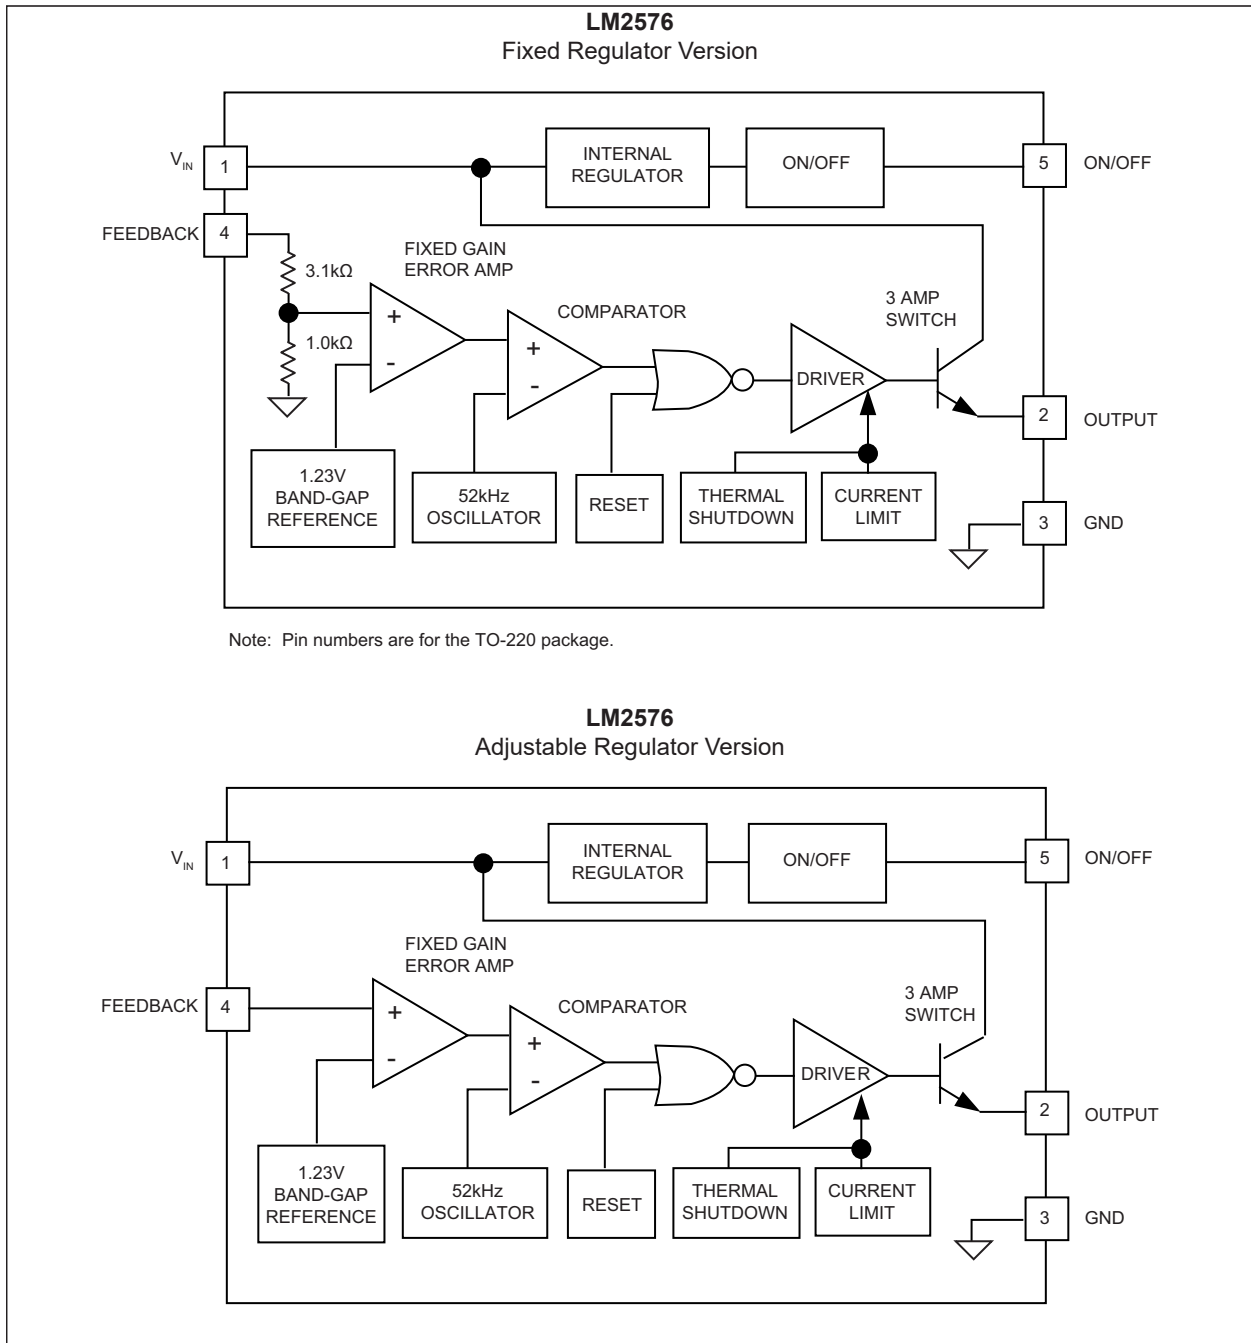

# LM2576

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings †

Maximum Supply Voltage.....	+45V
ON/OFF Pin Input Voltage.....	$-0.3V \leq V \leq +40V$
Output Voltage to Ground.....	-1V
Power Dissipation.....	Internally Limited
ESD Rating (Note 1)	
C = 100 pF, R = 1.5 kΩ.....	2 kV
FB Pin.....	1 kV

### Operating Ratings ††

Supply Voltage ( $V_{IN}$ ).....	+40V
----------------------------------	------

† **Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

†† **Notice:** The device is not guaranteed to function outside its operating ratings.

**Note 1:** Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5 kΩ in series with 100 pF.

## ELECTRICAL CHARACTERISTICS

Specifications with standard typeface are for  $T_J = +25^\circ\text{C}$ , **bold** values are valid for  $-40^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$ . Unless otherwise specified,  $V_{IN} = 12\text{V}$ , and  $I_{LOAD} = 500\text{ mA}$ . [Note 1](#)

Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions
<b>System Parameters, Adjustable Regulators (Note 2) Test Circuit Figure 4-1</b>						
Feedback Voltage	$V_{OUT}$	1.217	1.230	1.243	V	$V_{IN} = 12\text{V}$ , $I_{LOAD} = 0.5\text{A}$ , $V_{OUT} = 5\text{V}$
Feedback Voltage LM2576	$V_{OUT}$	1.193	1.230	1.267	V	$0.5\text{A} \leq I_{LOAD} \leq 3\text{A}$ , $8\text{V} \leq V_{IN} \leq 40\text{V}$ , $V_{OUT} = 5\text{V}$
		<b>1.180</b>	—	<b>1.280</b>		
Efficiency	$\eta$	—	82	—	%	$V_{IN} = 12\text{V}$ , $I_{LOAD} = 3\text{A}$ , $V_{OUT} = 5\text{V}$
<b>System Parameters, 3.3V Regulators (Note 2) Test Circuit Figure 4-1</b>						
Output Voltage	$V_{OUT}$	3.234	3.3	3.363	V	$V_{IN} = 12\text{V}$ , $I_{LOAD} = 0.5\text{A}$ , $V_{OUT} = 3.3\text{V}$
Output voltage LM2576-3.3	$V_{OUT}$	3.168	3.3	3.432	V	$0.5\text{A} \leq I_{LOAD} \leq 3\text{A}$ , $6\text{V} \leq V_{IN} \leq 40\text{V}$ , $V_{OUT} = 3.3\text{V}$
		<b>3.135</b>	—	<b>3.465</b>		
Efficiency	$\eta$	—	75	—	%	$V_{IN} = 12\text{V}$ , $I_{LOAD} = 3\text{A}$
<b>System Parameters, 5V Regulators (Note 2) Test Circuit Figure 4-1</b>						
Output Voltage	$V_{OUT}$	4.900	5.0	5.100	V	$V_{IN} = 12\text{V}$ , $I_{LOAD} = 0.5\text{A}$ , $V_{OUT} = 5.0\text{V}$
Output voltage LM2576-5.0	$V_{OUT}$	4.800	5.0	5.200	V	$0.5\text{A} \leq I_{LOAD} \leq 3\text{A}$ , $8\text{V} \leq V_{IN} \leq 40\text{V}$ , $V_{OUT} = 5.0\text{V}$
		<b>4.750</b>	—	<b>5.250</b>		

**Note 1:** Specification for packaged product only.

- External components such as the catch diode, inductor, input and output capacitors can affect switching regulator system performance. When the LM2576/LM1576 is used as shown in [Figure 4-1](#) test circuit, system performance will be shown in system parameters section of Electrical Characteristics.
- Output (pin 2) sourcing current. No diode, inductor or capacitor connected to output.
- Feedback (pin 4) removed from output and connected to 0V.
- Feedback (pin 4) removed from output and connected to 12V to force the output transistor OFF.

## ELECTRICAL CHARACTERISTICS (CONTINUED)

Specifications with standard typeface are for  $T_J = +25^\circ\text{C}$ , **bold** values are valid for  $-40^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$ . Unless otherwise specified,  $V_{IN} = 12\text{V}$ , and  $I_{LOAD} = 500\text{ mA}$ . [Note 1](#)

Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions
Efficiency	$\eta$	—	82	—	%	$V_{IN} = 12\text{V}$ , $I_{LOAD} = 3\text{A}$
<b>System Parameters, 12V Regulators (Note 2) Test Circuit Figure 4-1</b>						
Output Voltage	$V_{OUT}$	11.760	12.0	12.240	V	$V_{IN} = 25\text{V}$ , $I_{LOAD} = 0.5\text{A}$ , $V_{OUT} = 12\text{V}$
Output voltage LM2576-12	$V_{OUT}$	11.520 <b>11.400</b>	12.0 —	12.480 <b>12.600</b>	V	$0.5\text{A} \leq I_{LOAD} \leq 3\text{A}$ , $15\text{V} \leq V_{IN} \leq 40\text{V}$ , $V_{OUT} = 12\text{V}$
Efficiency	$\eta$	—	88	—	%	$V_{IN} = 25\text{V}$ , $I_{LOAD} = 3\text{A}$
<b>Device Parameters, Adjustable Regulator</b>						
Feedback Bias Current	$I_B$	100	50	<b>500</b>	nA	$V_{OUT} = 5\text{V}$
<b>Device Parameters, Fixed and Adjustable Regulators</b>						
Oscillator Frequency	$f_O$	47 <b>42</b>	52 —	58 <b>63</b>	kHz	—
Saturation Voltage	$V_{SAT}$	— —	1.4 —	1.8 <b>2.0</b>		
Max. Duty Cycle (ON)	DC	93	98	—	%	<a href="#">Note 4</a>
Current Limit	$I_{LIM}$	4.2 <b>3.5</b>	5.8 —	6.9 <b>7.5</b>	A	Peak current, $t_{ON} \leq 3\ \mu\text{s}$ , <a href="#">Note 3</a>
Output Leakage Current	$I_L$	—	—	2	mA	$V_{IN} = 40\text{V}$ , <a href="#">Note 5</a> , Output = 0V
		—	7.5	—		Output = -1V
		—	—	30		<a href="#">Note 5</a> , Output = -1V
Quiescent Current	$I_Q$	—	5	10	mA	<a href="#">Note 5</a>
Standby Quiescent Current	$I_{STBY}$	—	50	200	$\mu\text{A}$	ON/OFF Pin = 5V (OFF)
<b>On/Off Control, Fixed and Adjustable Regulators, Test Circuit Figure 4-1</b>						
ON/OFF Pin Logic Input Level	$V_{IH}$	2.2	1.4	<b>2.4</b>	V	$V_{OUT} = 0\text{V}$
	$V_{IL}$	1.0	1.2	<b>0.8</b>		$V_{OUT} = 5\text{V}$
ON/OFF Pin Logic Current	$I_{IH}$	—	4	30	$\mu\text{A}$	ON/OFF Pin = 5V (OFF)
	$I_{IL}$	—	0.01	10		ON/OFF Pin = 0V (ON)

**Note 1:** Specification for packaged product only.

**2:** External components such as the catch diode, inductor, input and output capacitors can affect switching regulator system performance. When the LM2576/LM1576 is used as shown in [Figure 4-1](#) test circuit, system performance will be shown in system parameters section of Electrical Characteristics.

**3:** Output (pin 2) sourcing current. No diode, inductor or capacitor connected to output.

**4:** Feedback (pin 4) removed from output and connected to 0V.

**5:** Feedback (pin 4) removed from output and connected to 12V to force the output transistor OFF.

# LM2576


## TEMPERATURE SPECIFICATIONS

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
<b>Temperature Ranges</b>						
Maximum Junction Temperature	$T_J$	—	—	+150	°C	—
Storage Temperature Range	$T_S$	-65	—	+150	°C	—
Lead Temperature	—	—	—	+260	°C	Soldering, 10 sec.
Operating Temperature Range	$T_A$	-40	—	+125	°C	—
<b>Package Thermal Resistance</b>						
Thermal Resistance, TO-220, TO-263	$\theta_{JA}$	—	65	—	°C/W	Junction-to-Ambient, <a href="#">Note 2</a>
Thermal Resistance, TO-220, TO-263	$\theta_{JA}$	—	45	—	°C/W	Junction-to-Ambient, <a href="#">Note 3</a>
Thermal Resistance, TO-220, TO-263	$\theta_{JC}$	—	2	—	°C/W	Junction-to-Case


- Note 1:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e.,  $T_A$ ,  $T_J$ ,  $\theta_{JA}$ ). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +125°C rating. Sustained junction temperatures above +125°C can impact the device reliability.
- 2:** Junction to ambient thermal resistance (no external heat sink) for the 5-lead TO-220 package mounted vertically, with 1/2" leads in a socket, or on PC board with minimum copper area.
- 3:** Junction to ambient thermal resistance (no external heat sink) for the 5-lead TO-220 package mounted vertically, with 1/4" leads soldered to PC board containing approximately 4 square inches of copper area surrounding the leads.
- 4:** Junction to ambient thermal resistance with approximately 1 square inch of PC board copper surrounding the leads. Additional copper will lower thermal resistance further.

## 2.0 TYPICAL PERFORMANCE CURVES


**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

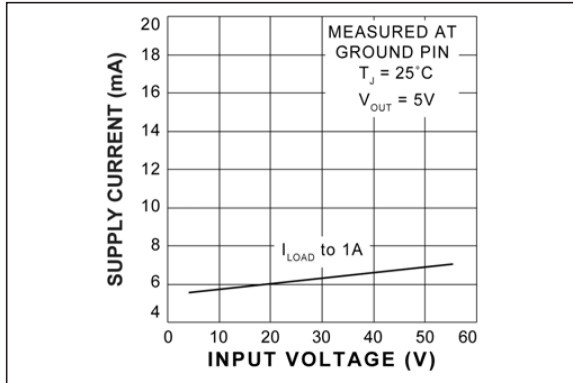


**FIGURE 2-1:** Supply Current.

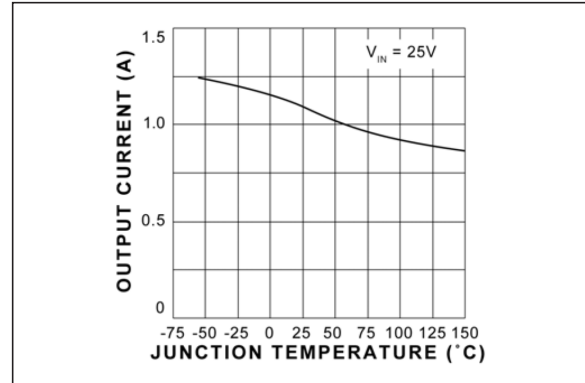


**FIGURE 2-4:** Current Limit.

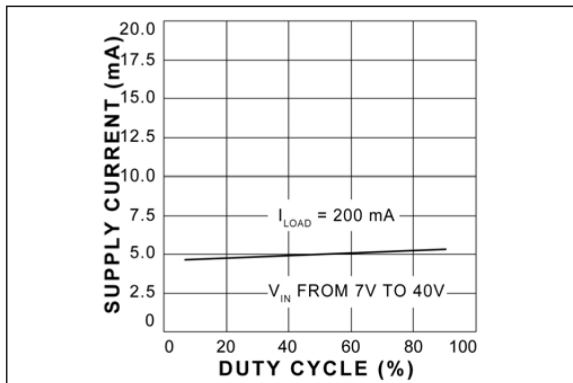


**FIGURE 2-2:** Supply Current vs. Duty Cycle.

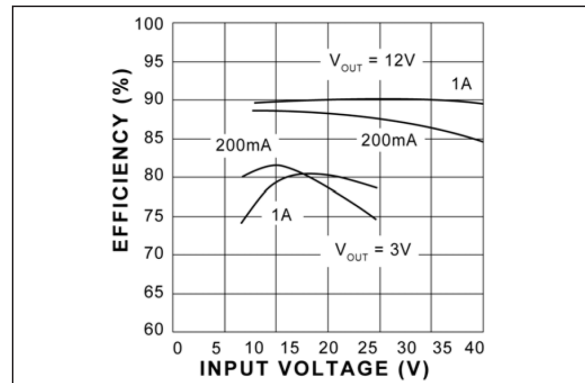

**FIGURE 2-5:** Efficiency.

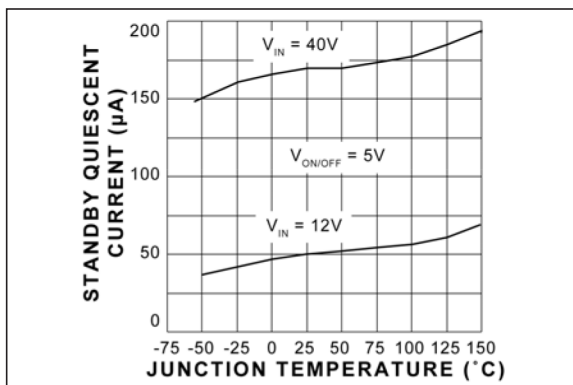

**FIGURE 2-3:** Standby Quiescent Current.

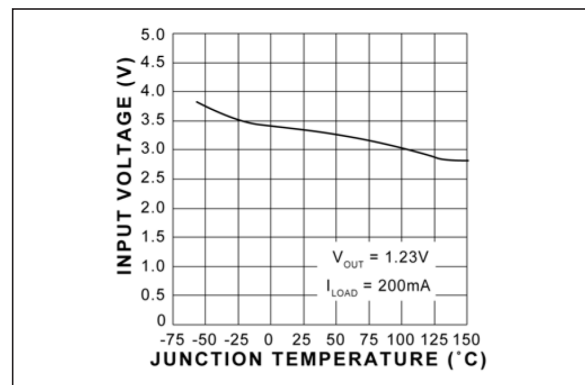

**FIGURE 2-6:** Minimum Operating Voltage.

# LM2576

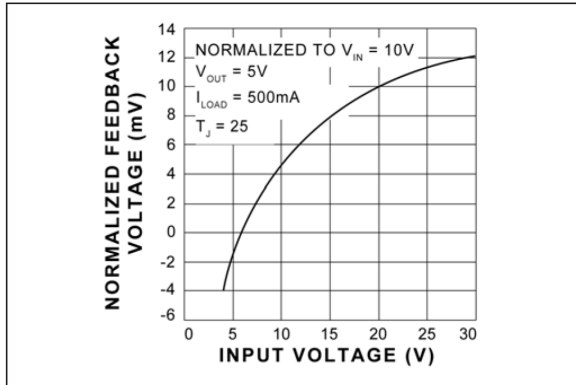


FIGURE 2-7: Line Regulation.

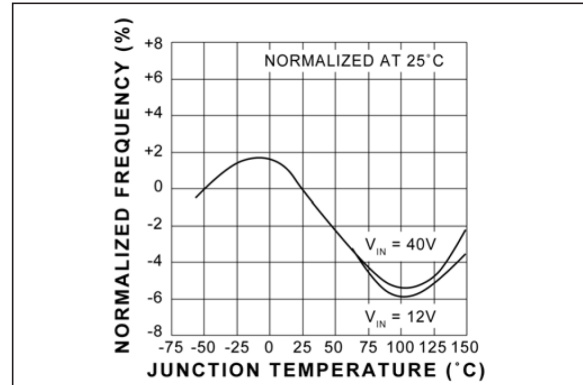


FIGURE 2-10: Oscillator Frequency.

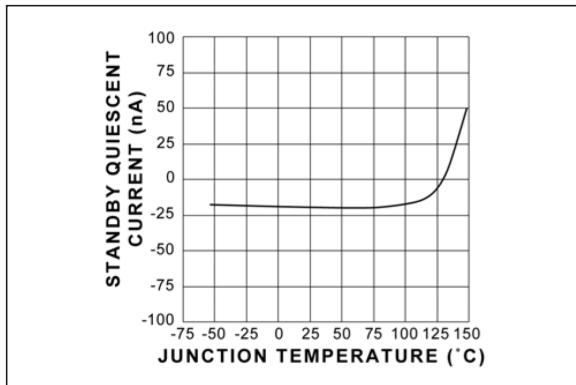


FIGURE 2-8: Feedback Pin Current.

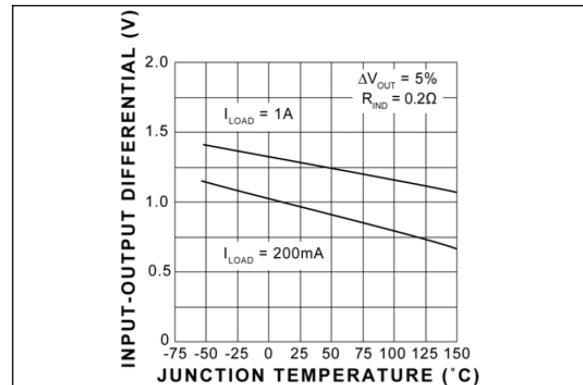


FIGURE 2-11: Dropout Voltage.

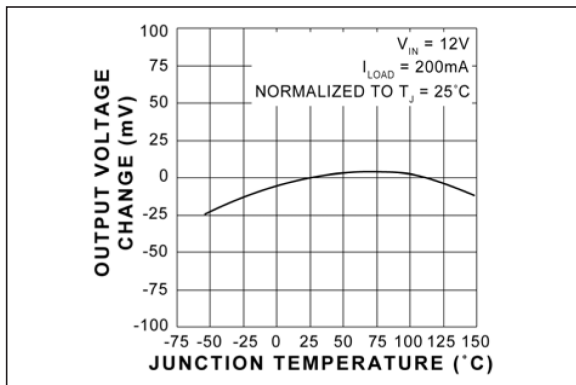


FIGURE 2-9: Normalized Output Voltage.



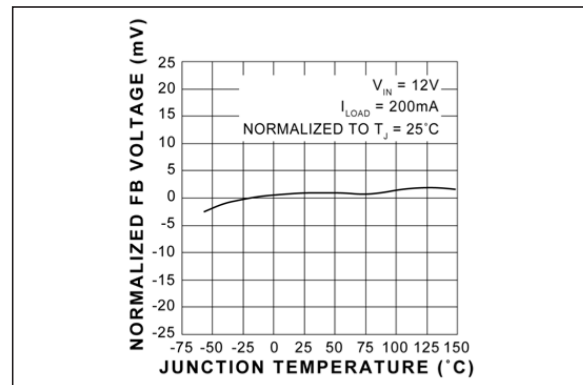


FIGURE 2-12: Normalized Feedback Voltage (Adjustable Version Only).




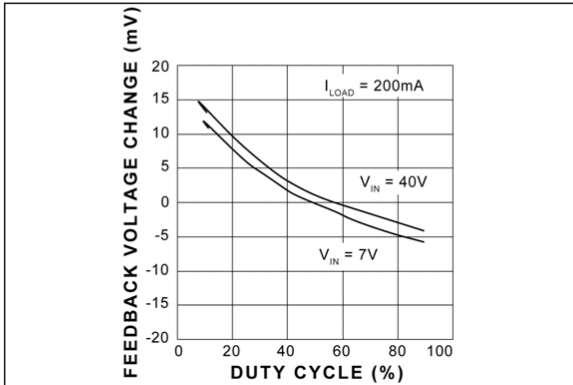

**FIGURE 2-13:** Feedback Voltage vs. Duty Cycle (Adjustable Version Only).

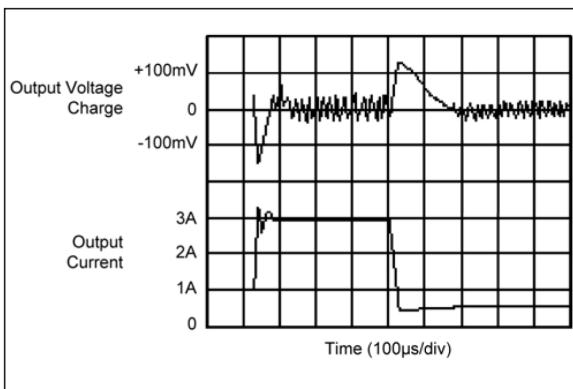

**FIGURE 2-14:** Load Transient Response.

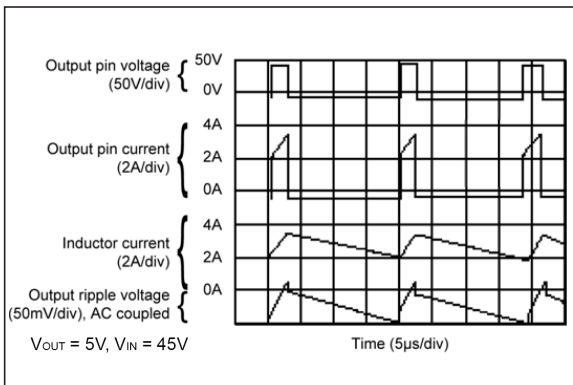

**FIGURE 2-15:** Switching Waveforms.

# LM2576

---

## 3.0 PIN DESCRIPTIONS


The descriptions of the pins are listed in [Table 3-1](#).

**TABLE 3-1: PIN FUNCTION TABLE**

Pin Number	Pin Name	Description
1	V <sub>IN</sub>	Supply input. Requires bypass capacitor to GND.
2	OUTPUT	Switch output. Internal MOSFET switch output.
3	GND	Ground.
4	FB	Feedback. For fixed output versions, connect to the output. For adjustable versions, connect to external resistive divider to set output voltage.
5	ON/OFF	Enable. Logic low enables operation. Logic high shuts down the regulator. Do not leave floating.

## 4.0 TEST CIRCUIT

As in any switching regulator, layout is very important. Rapidly switching currents associated with wiring inductance generate voltage transients which can cause problems. For minimal stray inductance and ground loops, the length of the leads indicated by heavy lines should be kept as short as possible. Single point grounding (as indicated) or grounding plane construction should be used for best results.

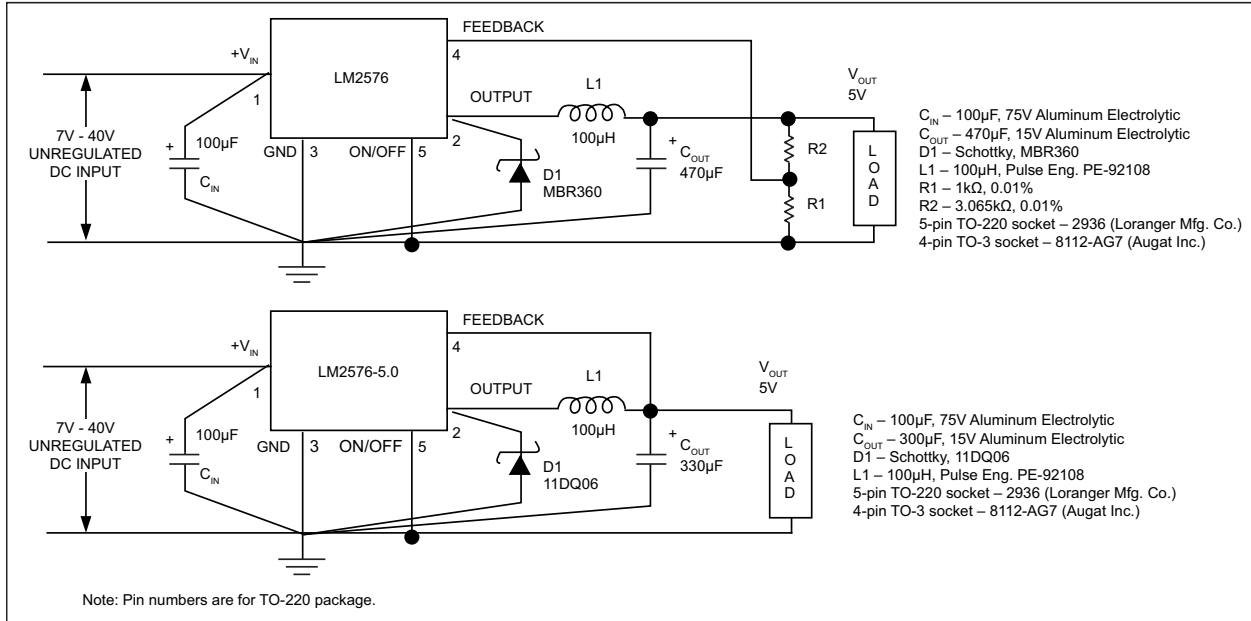


**FIGURE 4-1:** Test Circuit.

# LM2576


## 5.0 PACKAGING INFORMATION

### 5.1 Package Marking Information

5-Lead TO-220\*  
5-Lead TO-263\*  
(Fixed Versions)



Example



5-Lead TO-220\*  
5-Lead TO-263\*  
(Adj. Versions)



Example




<p><b>Legend:</b> XX...X Product code or customer-specific information Y Year code (last digit of calendar year) YY Year code (last 2 digits of calendar year) WW Week code (week of January 1 is week '01') NNN Alphanumeric traceability code Ⓔ3 Pb-free JEDEC® designator for Matte Tin (Sn) * This package is Pb-free. The Pb-free JEDEC designator (Ⓔ3) can be found on the outer packaging for this package.</p> <p>●, ▲, ▼ Pin one index is identified by a dot, delta up, or delta down (triangle mark).</p>
<p><b>Note:</b> In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.</p> <p>Underbar ( _ ) and/or Overbar ( ¯ ) symbol may not be to scale.</p>

## 5-Lead TO-220 Package Outline and Recommended Land Pattern

### 5-Lead Transistor Outline Type LB03 (B8X) - [TO-220] Micrel Legacy Package TO220-LB03-5LD-PL-1


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

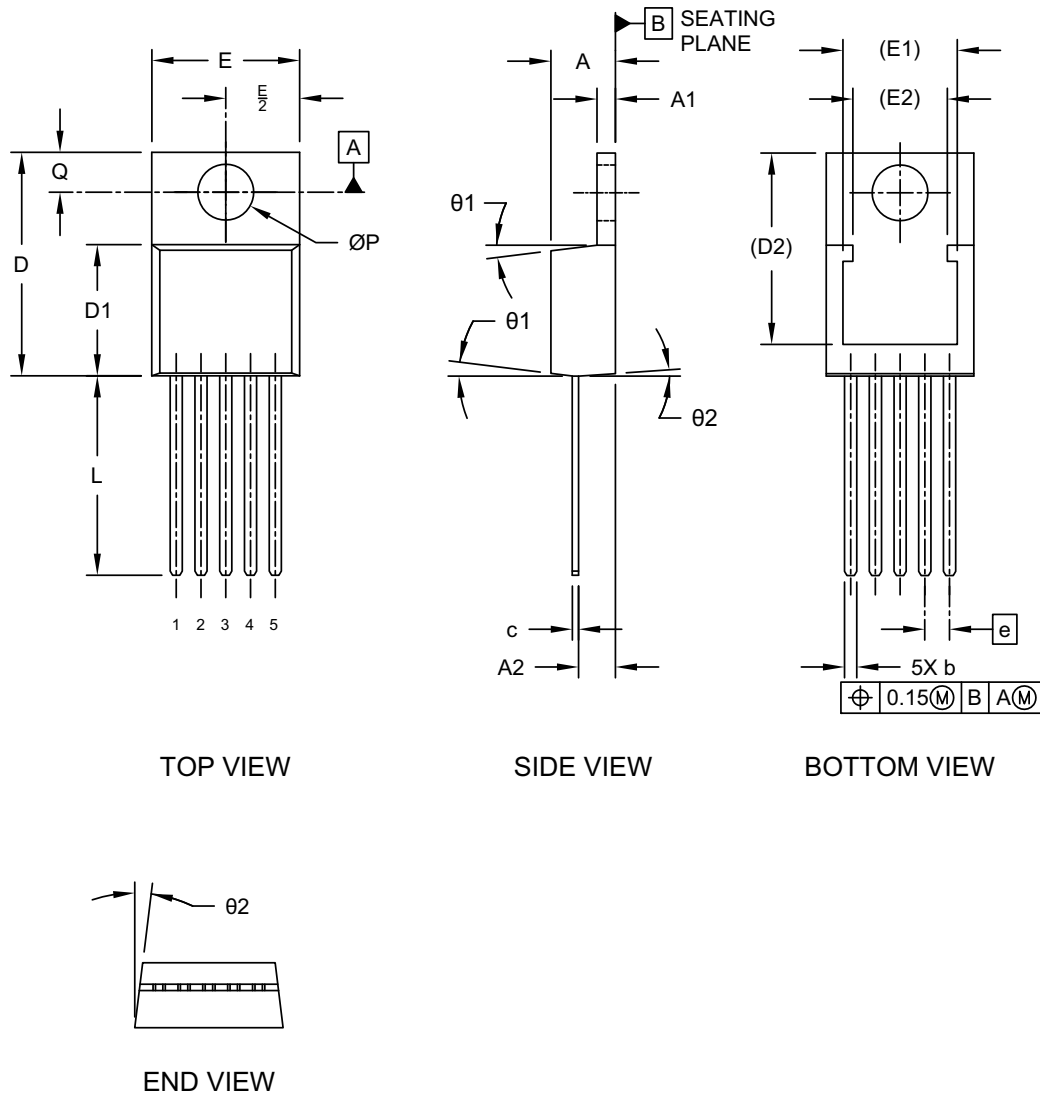

Microchip Technology Drawing C04-036 Rev C Sheet 1 of 2

## 5-Lead Transistor Outline Type LB03 (B8X) - [TO-220] Micrel Legacy Package TO220-LB03-5LD-PL-1

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

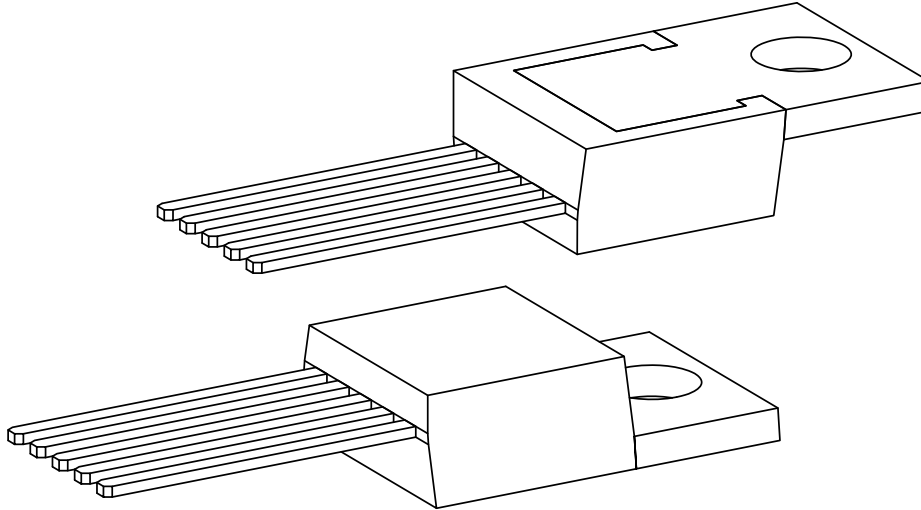

Dimension Limits		INCHES		
		Min	Nom	Max
Number of Leads	N	5		
Pitch	e	.067 BSC		
Overall Height	A	.160	.175	.190
Tab Height	A1	.045	.050	.055
Seating Plane to Lead	A2	.080	.098	.115
Lead Width	b	.025	.033	.040
Lead Thickness	c	.012	.016	.020
Lead Length	L	.500	.540	.580
Total Body Length Including Tab	D	.542	.580	.619
Molded Body Length	D1	.348	.354	.360
Total Width	E	.380	.400	.420
Pad Width	E1	0.256 REF		
Pad Length	D2	0.486 REF		
Hole Diameter	ØP	.146	.151	.156
Hole Center to Tab Edge	Q	.103	.108	.113
Molded Body Draft Angle	Ø2	3	7	10
Molded Body Draft Angle	Ø2	1	4	7

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-036 Rev C Sheet 2 of 2

## 5-Lead TO-263 Package Outline and Recommended Land Pattern

**TITLE**


5 LEAD T0263 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

<b>DRAWING #</b>	T0263-5LD-PL-1	<b>UNIT</b>	INCH/MM
------------------	----------------	-------------	---------

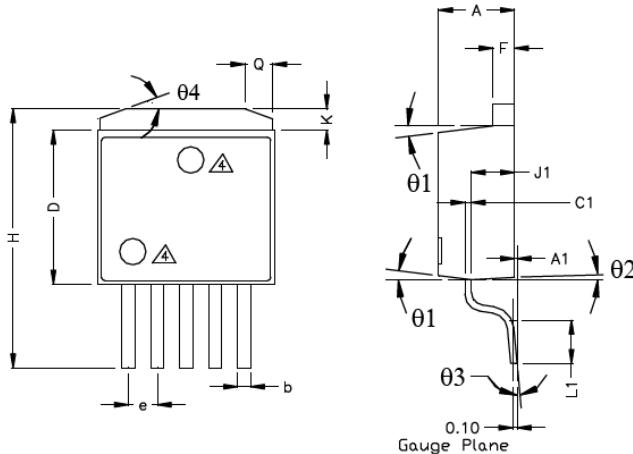

TOP VIEW


SIDE VIEW 1

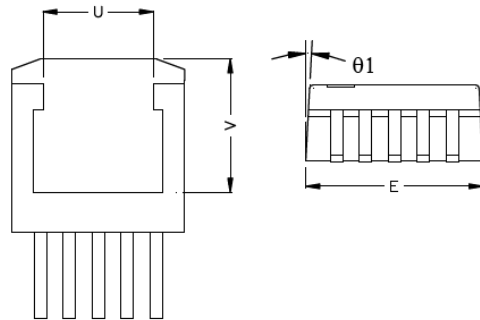

BOTTOM VIEW

SIDE VIEW 2

POS	INCH		MM	
	MIN	MAX	MIN	MAX
A	0.170	0.181	4.318	4.597
A1	0.000	0.012	0.000	0.305
b	0.026	0.036	0.660	0.914
C1	0.012	0.023	0.305	0.584
D	0.330	0.361	8.392	9.169
E	0.396	0.420	10.058	10.668
e	0.062	0.072	1.575	1.829
F	0.045	0.055	1.143	1.397
H	0.575	0.625	14.605	15.875
J1	0.080	0.120	2.032	3.048
K	0.045	0.066	1.143	1.676
L1	0.090	0.110	2.286	2.794
theta1	3°	10°	3°	10°
theta2	1°	7°	1°	7°
theta3	0°	8°	0°	8°
theta4	18°	22°	18°	22°
Q	0.055	0.075	1.397	1.905
U	0.256	Ref.	6.502	Ref.
V	0.305	Ref.	7.747	Ref.

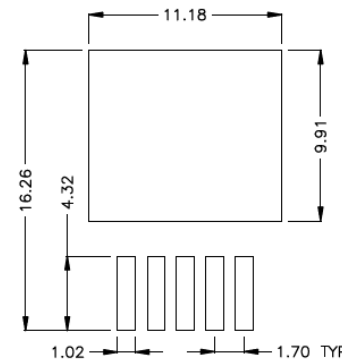

RECOMMENDED LAND PATTERN  
(UNIT : mm)

- NOTE:
1. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR.
  2. PACKAGE OUTLINE INCLUSIVE OF PLATING THICKNESS.
  3. FOOT LENGTH USING GAUGE PLANE METHOD MEASUREMENT 0.010"
  4. PACKAGE TOP MARK MAY BE IN TOP CENTER OR LOWER LEFT CORNER
  5. ALL DIMENSIONS ARE IN INCHES/MILLIMETERS.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>.

# LM2576

---

NOTES:



## APPENDIX A: REVISION HISTORY

### Revision A (August 2019)

- Converted Micrel document LM2576 to Microchip data sheet template DS20006238A.
- Minor grammatical text changes throughout.

# LM2576

---

NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

Device	-X.X	X	X	-XX	
Part No.	Output Voltage	Junction Temp. Range	Package	Media Type	
<b>Device:</b>	LM2576:	52 kHz Simple 3A Buck Regulator			
<b>Output Voltage:</b>	<blank> = Adjustable 3.3 = 3.3V 5.0 = 5.0V 12 = 12V				
<b>Junction Temperature Range:</b>	W =	-40°C to +125°C, RoHS-Compliant			
<b>Package:</b>	T =	5-Lead TO-220			
	U =	5-Lead TO-263			
<b>Media Type:</b>	<blank>= 50/Tube TR = 750/Reel				
<b>Examples:</b>					
a) LM2576WT:	LM2576, Adj. Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-220, 50/Tube				
b) LM2576-3.3WT:	LM2576, 3.3V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-220, 50/Tube				
c) LM2576-5.0WT:	LM2576, 5.0V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-220, 50/Tube				
d) LM2576-12WT:	LM2576, 12V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-220, 50/Tube				
e) LM2576WU:	LM2576, Adj. Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-263, 50/Tube				
f) LM2576-3.3WU:	LM2576, 3.3V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-263, 50/Tube				
g) LM2576-5.0WU:	LM2576, 5.0V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-263, 50/Tube				
h) LM2576-12WU:	LM2576, 12V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-263, 50/Tube				
i) LM2576WU-TR:	LM2576, Adj. Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-263, 750/Reel				
j) LM2576-3.3WU-TR:	LM2576, 3.3V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-263, 750/Reel				
k) LM2576-5.0WU-TR:	LM2576, 5.0V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-263, 750/Reel				
l) LM2576-12WU-TR:	LM2576, 12V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TO-263, 750/Reel				
<b>Note 1:</b>	Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.				

# LM2576

---

NOTES:

---

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as “unbreakable.”

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

### Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackeTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2019, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-4901-0

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).



# MICROCHIP

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

#### Atlanta

Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

#### Austin, TX

Tel: 512-257-3370

#### Boston

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

#### Chicago

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

#### Dallas

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

#### Detroit

Novi, MI  
Tel: 248-848-4000

#### Houston, TX

Tel: 281-894-5983

#### Indianapolis

Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

#### Los Angeles

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

#### Raleigh, NC

Tel: 919-844-7510

#### New York, NY

Tel: 631-435-6000

#### San Jose, CA

Tel: 408-735-9110  
Tel: 408-436-4270

#### Canada - Toronto

Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820