



# **Product Specification**

# SPECIFICATION FOR APPROVAL

# ( ) Preliminary Specification( ● ) Final Specification

Title

BUYER	APPLE	SUPPLIER	LG Display Co., Ltd.
MODEL	K62 PRQ	*MODEL	LM270WQ1
		SUFFIX	SDF5

\*When you obtain standard approval, please use the above model name without suffix

27.0" QHD TFT LCD

APPROVED BY	SIGNATURE DATE
Please return 1 copy for you	ur confirmation with
your signature and	comments.

APPROVED BY	SIGNATURE DATE
S Y Park / G.Manager	
REVIEWED BY	
S J So / Manager	
PREPARED BY	
S R Yoo / Engineer	
MNT Products Enginee LG Display Co.,	

Ver. 1.0 JAN. 20. 2012 1 / 39





# **Product Specification**

# **Contents**

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	4
1	GENERAL DESCRIPTION	5
2	ABSOLUTE MAXIMUM RATINGS	6
3	ELECTRICAL SPECIFICATIONS	7
3-1	ELECTRICAL CHARACTREISTICS	7
3-2	INTERFACE CONNECTIONS	10
3-3	SIGNAL TIMING SPECIFICATIONS	13
3-4	SIGNAL TIMING WAVEFORMS	14
3-5	COLOR INPUT DATA REFERNECE	15
3-6	POWER SEQUENCE	16
4	OPTICAL SFECIFICATIONS	20
5	MECHANICAL CHARACTERISTICS	26
6	RELIABLITY	29
7	INTERNATIONAL STANDARDS	30
7-1	SAFETY	30
7-2	EMC	30
8	PACKING	31
8-1	DESIGNATION OF LOT MARK	31
8-2	PACKING FORM	31
9	PRECAUTIONS	32
9-1	MOUNTING PRECAUTIONS	32
9-2	OPERATING PRECAUTIONS	32
9-3	ELECTROSTATIC DISCHARGE CONTROL	33
9-4	PRECAUTIONS FOR STRONG LIGHT EXPOSURE	33
9-5	STORAGE	33
9-6	HANDLING PRECAUTIONS FOR PROTECTION FILM	33

**Ver. 1.0 JAN. 20. 2012** 2 / 39





# **Product Specification**

# **Contents**

No	ITEM	Page
10	EDID DATA	34
10-1	EDID DATA	34
10-2	EDID READ/WRITE PROTOCOL	37







# **Product Specification**

# **RECORD OF REVISIONS**

Revision No	Revision Date	Page	Description
0.0	Nov. 1. 2010	-	First Draft(Preliminary)
	Nov. 15. 2010	34~37	Update EDID data
0.1	Feb. 25. 2011	1	Update Model Name (K62AH → K62 PRQ)
0.2	Mar. 22. 2011	27~28	Update a mechanic drawing
0.3	Apr. 27. 2011	7	Update Electrical Characteristics
		8	Add BER Spec
		14~15	Add Timing Table (VESA & CEA 1280x720 timing)
		18	Update Power Sequence (T8 Min. : 500ms → 200ms)
		30	Update a mechanic drawing
0.4	Jun. 9. 2011	1	Update Suffix (SDE1 → SDE5)
		5	Update Power Consumption
		9	Update LED Bar Electrical Characteristics
		22	Update Color Coordinates
		30	Update a mechanic drawing
0.5	Jun. 15. 2011	8	Update BER Spec
0.6	Jun. 23. 2011	12	Update LED Connector Pin Configuration
0.7	Jan. 20. 2012	5	Luminance Spec change
		22	Luminance Spec change
		23	Update Lot Minimum Luminance Spec

**Ver. 1.0 JAN. 20. 2012** 4 / 39






## **Product Specification**

## 1. General Description

LM270WQHD is a Color Active Matrix Liquid Crystal Display with Light Emitting Diode (White LED) backlight system without LED driver. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally black mode. It has a 27inch diagonally measured active display area with QHD resolution (2560 vertical by 1440 horizontal pixel array) Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 10-bit gray scale signal for each dot, thus, presenting a palette of more than 1.07B colors with FRC (Frame Rate Control).

It has been designed to apply the 10-bit 4Lane Display port interface.

It is intended to support displays where high brightness, super wide viewing angle, high color saturation, and high color are important.

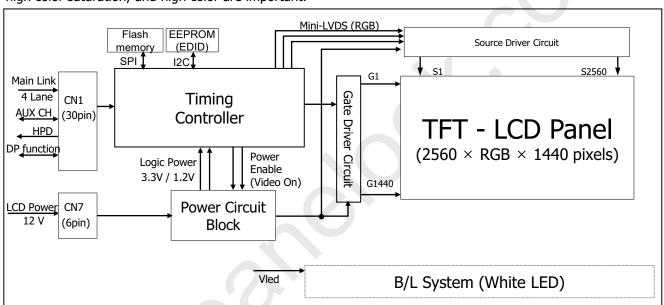

#### **General Features**

<u></u>	
Active Screen Size	27.0 inches(68.47cm) diagonal
Outline Dimension	630.0(H) x 376.13(V) x 19.8(D) mm(Typ.)
Pixel Pitch	0.2331 mm x 0.2331 mm
Pixel Format	2560 horiz. By 1440 vert. Pixels RGB stripes arrangement
Color Depth	8-bit, 16,777,216 colors
Luminance, White	460 cd/m <sup>2</sup> ( 5 points Avg.)
Viewing Angle(CR>10)	View Angle Free (R/L 178(Typ.), U/D 178(Typ.))
Power Consumption	Total 73.52 Watt (Max.) (10.92 Watt @VLCD, Max 62.6 Watt_Duty 100% of DC 350 mA_w/o driver)
Weight	4050 g (typ.)
Display Operating Mode	Transmissive mode, normally black
Surface Treatment	Glare (Low Reflection treatment of the front polarizer)
HDCP	HDCP key implemented in Tcon (DP628)
Ver. 1.0	JAN. 20. 2012 5 / 39





# **Product Specification**

## 2. Absolute Maximum Ratings


The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

**Table 1. ABSOLUTE MAXIMUM RATINGS** 

Parameter	Symbol	Valu	ies	Units	Notes	
Parameter	Symbol	Min	Max	Offics		
Power Input Voltage	VLCD	-0.3	14	Vdc	at 25 ± 2°C	
Operating Temperature	Тор	0	50	°C	4.2	
Storage Temperature	Тѕт	-20	60	°C		
Operating Ambient Humidity	Нор	10	90	%RH	1, 2	
Storage Humidity	Нѕт	10	90	%RH		

Note: 1. Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be 39 °C Max, and no condensation of water.

2. Storage condition is guaranteed under packing condition

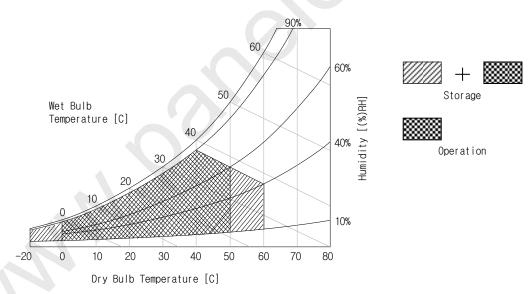





## **Product Specification**

## 3. Electrical Specifications

#### 3-1. Electrical Characteristics

It requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input power for the DP Rx.

Table 2-1-1. ELECTRICAL CHARACTERISTICS (Normal Mode)


Parameter	Cumbol		Values		Unit	Notes
Parameter	Symbol	Min	Тур	Max	Unit	Notes
MODULE :				<b>\</b>		
Power Supply Input voltage	VLCD	11.6	12.0	12.4	Vdc	
Permissive Power Input Ripple	VdRF	ı		400	mVp-p	
Dower Cupply Input Current	ILCD	-	(550)	(720)	mA	1
Power Supply Input Current	ILCD	-	(700)	(910)	mA	2
Dower Consumption	PLCD	-	(6.60)	(8.64)	Watt	1
Power Consumption	PLCD		(8.40)	(10.92)	Watt	2
Rush Current	IRUSH_VLCD	-	-	3.0	Α	3

#### Note:


- 1. The specified current and power consumption are under the  $V_{LCD}$ =12.0V, 25  $\pm$  2°C, $f_V$ =60Hz condition whereas mosaic pattern(8 x 6) is displayed and  $f_V$  is the frame frequency.
- 2. The current is specified at the maximum current pattern.

White: 255Gray

3. The duration of rush current is about 2ms and rising time of power Input is 1ms(min.).



Mosaic Pattern(8 x 6)



White Pattern





## **Product Specification**

# 3-1-2. DisplayPort Main Link Receiver Characteristics

DP628 which supports Apple BER Spec with below test condition is used for DP Rx.

#### Table 2-1-2. DISPLAYPORT MAIN LINK RECEIVER CHARACTERISTICS

Darameter		Values		Notes
Parameter	Min	Тур	Max	Notes
Symbol Error Rate,				
normal link data transmission,			10 <sup>-13</sup>	1~5
HBR, 4 lane operation				

#### Note:

- 1. Jitter Tolerance Testing follows VESA DisplayPort™ PHY Compliance Testing Standard, Version 1.1a. Jitter composition is specified in the Standard.
- 2. TJ at Receiver Connector (TP3)  $\leq$  0.491UI @ Bit Error Rate (BER) = 10  $^{-13}$
- 3. Eye Height at TP3  $\geq$  150mVpp
- 4. Max lane to lane mismatch of insertion loss at TP3 :  $20*log |max(eye height)/min(eye height)| \le 2.3dB$
- 5. Max source pre-emphasis level at level 0 (0dB)  $\leq$  0.25dB





## Product Specification

#### Table 2-2. LED Bar ELECTRICAL CHARACTERISTICS

Items	Symbol	Spec			Unit	Remark	Notes
Items	Symbol	Min	Тур	Max	Ullit	Remark	Notes
LED String Voltage	V <sub>s</sub>	(52.6)	(56.1)	(59.6)	Vrms	Ta=25℃, at Duty 100% of DC 350mA	1,2,3, 7
LED String Power	$P_{S}$	(18.4)	(19.6)	(20.9)	W	Ta=25 $^{\circ}$ C, at Duty 100% of DC 350mA	1,2,3, 4,6,7
BL Power	P <sub>BL</sub>	ı	(58.9)	(62.6)	W	Ta=25℃, at Duty 100% of DC 350mA	1,2,4, 6,7
LED Life Time	LED_LT	30K		-	Hrs	Tj≤90°C, at Duty 100% of DC 350mA	5,7,8
LED Junction Temperature	Tj			150	°C	-	7,8

### LED driver design guide

: The design of the LED driver must have specifications for the LED in LCD Assembly.

The performance of the LED in LCM, for example life time or brightness, is extremely influenced by the characteristics of the LED driver.

So all the parameters of an LED driver should be carefully designed and output current should be Constant current control.

Please control feedback current of each string individually to compensate the current variation among the strings of LEDs.

When you design or order the LED driver, please make sure unwanted lighting caused by the mismatch of the LED and the LED driver (no lighting, flicker, etc) never occurs.

When you confirm it, the LCD module should be operated in the same condition as installed in your instrument.

- 1. Specified values are for a single LED bar.
- 2. The specified current is input LED chip 100% duty current.
- 3. The specified voltage is input LED string and Bar voltage at typical 350 mA 100% duty current.
- 4. The specified power consumption is input LED bar power consumption at typical 350 mA 100% duty current.
- 5. The LED life time is determined as the time at which brightness of the LED is 70% compared to that of initial value at the typical LED current on condition of continuous operating at below junction temperature 90°C.
- 6. The LED power consumption shown above does not include loss of external driver.
  - The used LED BL current is the LED typical current.
  - String Power Consumption is calculated with  $P_S = V_S x 350 \text{mA}$
  - BL Power Consumption is calculated with  $P_{BL} = V_{Bar}x$  350mA x 3 (String no.)
- 7. LED operating DC Forward Current and Junction Temperature must not exceed LED Max Ratings.
- 8. The LED life time and the maximum rating of LED junction temperature are evaluated at LED package level, not at liquid crystal module level.

Ver. 1.0 JAN. 20. 2012 9 / 39





# **Product Specification**

### **3-2. Interface Connections**

#### **3-2-1. LCD Module**


- LCD Connector(CN1): 20525-030E-01 (manufactured by I-PEX)
The pin configuration for the 30 pin connector is shown in the table below.


Table 3-1. MODULE CONNECTOR(CN1) PIN CONFIGURATION

No.	Symbol	Description	No.	Symbol	Description
1	GND	Ground	16	Lane0N	Components Signal for Main Link 0
2	DDC_SDA	DDC Data	17	GND	High Speed Ground for Main Link 1
3	DDC_SCL	DDC Clock	18	Lane1P	True Signal for Main Link 1
4	GND	Ground	19	Lane1N	Components Signal for Main Link 1
5	I2C_SDA	I2C Data	20	GND	High Speed Ground for Main Link 2
6	I2C_SCL	I2C Clock	21	Lane2P	True Signal for Main Link 2
7	GND	Ground	22	Lane2N	Components Signal for Main Link 2
8	SPDIF	Audio output from DP Rx	23	GND	High Speed Ground for Main Link 3
9	OPTION_1	TBD	24	Lane3P	True Signal for Main Link 3
10	HPD	Hot Plug Detect Signal	25	Lane3N	Components Signal for Main Link 3
11	GND	High Speed Ground for Auxiliary Channel	26	GND	High Speed Ground
12	AUX_CHN	Component Signal for Auxiliary	27	VIDEO_ON	Video status from DP Rx
13	AUX_CHP	True Signal for Auxiliary Channel	28	OPTION_2	TBD
14	GND	High Speed Ground for Main Link 0	29	VSYNC	Vertical sync output from DP Rx
15	Lane0P	True Signal for Main Link 0	30	GND	Ground

Notes: 1. Connector

2.1 Connector(Receptacle): 20525-030E-01(I-PEX)
2.2 Mating Connector(Plug): 20523-030T-01(I-PEX)





**Ver. 1.0 JAN. 20. 2012** 10 / 39





## **Product Specification**


### **3-2. Interface Connections**


#### **3-2-1. LCD Module**

- Power Connector(CN7): 53780-8608 (manufactured by MOLEX)
The pin configuration for the 6 pin connector is shown in the table below.

Table 3-2. POWER CONNECTOR(CN7) PIN CONFIGURATION

Pin	Symbol	Description	NOTES
1	GND	Ground	
2	GND	Ground	
3	GND	Ground	
4	VIN	12V for LCM main power	
5	VIN	12V for LCM main power	
6	VIN	12V for LCM main power	





Rear view of LCM

#### 3-2-2. Sync Connector

This connector is used for synchronized LED Driver. The connector is 53780-8604. (Manufactured by MOLEX)

Table 4. LED SYNCHRONIZED CONNECTOR(CN4) PIN CONFIGURATION

Pin	Symbol	Description	NOTES
1	DXP	Positive connection to remote temp. sensor	
2	DXN	Negative connection to remote temp. sensor	
3	GND	Ground	
4	VSYNCM	VSYNCM for synchronized LED Driver	





# **Product Specification**

# 3-2-3. Backlight Interface

- LED Connector : **H401K-D12N-12B** (Manufactured by E&T)

- Mating Connector : **4530K-F12N-01R** (Manufactured by E&T)

#### **Table 5. LED CONNECTOR PIN CONFIGULATION**

Pin No.	Symbol	Description	Note
1	NC	NC	
2	LED1-	LED channel 1 Cathode	
3	LED2+	LED channel 2 Anode	
4	NC	NC	
5	NC	NC	
6	LED3-	LED channel 3 Cathode	1 Dou
7	LED1+	LED channel 1 Anode	1 Bar
8	NC	NC	
9	NC	NC	
10	LED2-	LED channel 2 Cathode	
11	LED3+	LED channel 3 Anode	
12	NC	NC	

**Ver. 1.0 JAN. 20. 2012** 12 / 39





## **Product Specification**

## 3-3. Signal Timing Specifications

All of the interface signal timing should be satisfied with the following specifications for it's proper operation.

Table 6\_1. TIMING TABLE (VESA COORDINATED VIDEO TIMING)

		1	1	1	<del></del>	1	
	ITEM	SYMBOL	Min	Тур	Max	Unit	Note
50.1	Period	tCLK	4.14	4.14	4.14	ns	
DCLK	Frequency	fCLK	241.5	241.5	241.5	MHz	_
	Period	tHP	2720	2720	2720	Algur	
Hsync	Width-Active	tWH	32	32	32	tCLK	
	Period	tVP	1481	1481	1481	tHP	
Vsync	Frequency	fV	59.95	59.95	59.95	Hz	
	Width-Active	twv	5	5	5	tHP	
	Horizontal Valid	tHV	2560	2560	2560		
	Horizontal Back Porch	tHBP	80	80	80	tCLK	
	Horizontal Front Porch	tHFP	48	48	48		
Data	Horizontal Blank		160	160	160		twn+ thbp+ thfp
Enable	Vertical Valid	tvv	1440	1440	1440		
	Vertical Back Porch	tVBP	33	33	33	Lus	
	Vertical Front Porch	tVFP	3	3	3	tHP	
	Vertical Blank	-	41	41	41		twv+ tvbp+ tvfp

Note: Hsync period and Hsync width-active should be even number times of tclk. If the value is odd number times of tclk, display control signal can be asynchronous. In order to operate this LCM a Hsync, Vsync, and DE(data enable) signals should be used.

- 1. The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rates.
- 2. Vsync and Hsync should be keep the above specification.
- 3. Hsync Period, Hsync Width, and Horizontal Back Porch should be any times of of character number(8).
- 4. The polarity of Hsync, Vsync is not restricted.

 Ver. 1.0
 JAN. 20. 2012
 13 / 39





## **Product Specification**

## Table 6\_2. 1280x720 TIMING TABLE (VESA COORDINATED VIDEO TIMING)

	ITEM	SYMBOL	Min	Тур	Max	Unit	Note
D.C.L.Y.	Period	tCLK	13.43	13.43	13.43	ns	
DCLK	Frequency	fCLK	74.5	74.5	74.5	MHz	
	Period	tHP	1664	1664	1664		
Hsync	Width-Active	tWH	128	128	128	tCLK	
	Period	tVP	748	748	748	tHP	
Vsync	Frequency	fV	59.85	59.85	59.85	Hz	
	Width-Active	twv	5	5	5	tHP	
	Horizontal Valid	tHV	1280	1280	1280		
	Horizontal Back Porch	tHBP	192	192	192	tCLK	
	Horizontal Front Porch	tHFP	64	64	64		
Data	Horizontal Blank	-	384	384	384		twn+ thbp+ thfp
Enable	Vertical Valid	tvv	720	720	720		
	Vertical Back Porch	tVBP	20	20	20	Lun	
	Vertical Front Porch	tVFP	3	3	3	tHP	
	Vertical Blank	-	28	28	28		twv+ tvbp+ tvfp

Note: Hsync period and Hsync width-active should be even number times of tclk. If the value is odd number times of tclk, display control signal can be asynchronous. In order to operate this LCM a Hsync, Vsync, and DE(data enable) signals should be used.

- 1. The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rates.
- 2. Vsync and Hsync should be keep the above specification.
- 3. Hsync Period, Hsync Width, and Horizontal Back Porch should be any times of of character number(8).
- 4. The polarity of Hsync, Vsync is not restricted.





## **Product Specification**

## Table 6\_3. 1280x720 TIMING TABLE (CEA COORDINATED VIDEO TIMING)

	ITEM	SYMBOL	Min	Тур	Max	Unit	Note
D.GU.Y	Period	tCLK	13.47	13.47	13.47	ns	
DCLK	Frequency	fCLK	74.25	74.25	74.25	MHz	
	Period	tHP	1650	1650	1650	Laur	
Hsync	Width-Active	twH	40	40	40	tclk	
	Period	tvp	750	750	750	tHP	
Vsync	Frequency	fV	60.00	60.00	60.00	Hz	
	Width-Active	twv	5	5	5	tHP	
	Horizontal Valid	tHV	1280	1280	1280		
	Horizontal Back Porch	tHBP	220	220	220	tCLK	
	Horizontal Front Porch	tHFP	110	110	110		
Data	Horizontal Blank	-	370	370	370		twn+ thbp+ thfp
Enable	Vertical Valid	tvv	720	720	720		
	Vertical Back Porch	tVBP	20	20	20	4110	
	Vertical Front Porch	tVFP	5	5	5	tHP	
	Vertical Blank	-	30	30	30		twv+ tvbp+ tvfp

Note: Hsync period and Hsync width-active should be even number times of tclk. If the value is odd number times of tclk, display control signal can be asynchronous. In order to operate this LCM a Hsync, Vsync, and DE(data enable) signals should be used.

- 1. The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rates.
- 2. Vsync and Hsync should be keep the above specification.
- 3. Hsync Period, Hsync Width, and Horizontal Back Porch should be any times of of character number(8).
- 4. The polarity of Hsync, Vsync is not restricted.


ver. 1.0	JAN. 20. 2012	15 / 39
----------	---------------	---------





# **Product Specification**

# 3-4. Signal Timing Waveforms

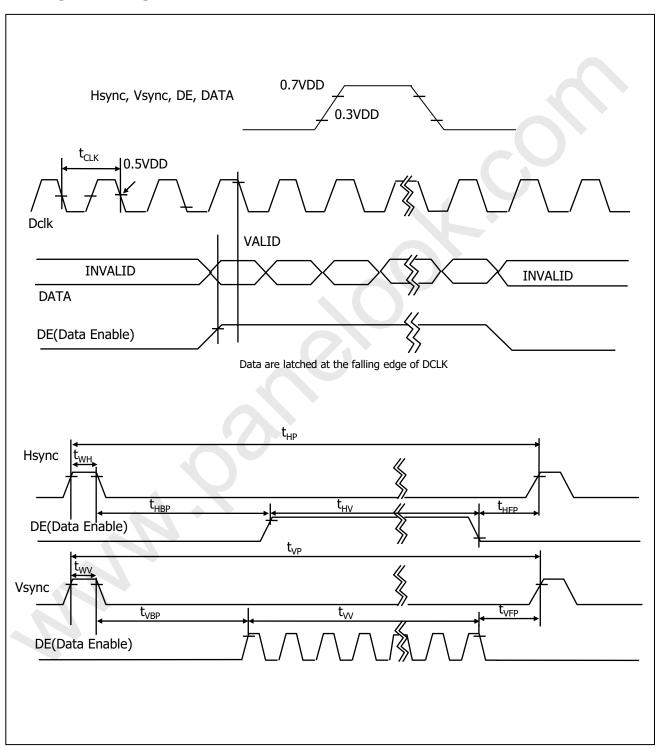

Ver. 1.0 JAN. 20. 2012 16 / 39





# **Product Specification**

## 3-5. Color Data Reference

The Brightness of each primary color(red,green,blue) is based on the 8-bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

**Table 7. COLOR DATA REFERENCE** 

													Inpu	ut Co	olor	Data	a									
	Color					RE	Đ							GRE	EN							BL	UE			
	COIOI		MS	B					L:	SB	MS	B					L	SB	MS	В					L	SB
			R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	В7	В6	В5	В4	В3	В2	В1	В0
	Black		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (255)		1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (255)		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Basic	Blue (255)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Color	Cyan		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta		1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	RED (000)	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (001)		0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
RED						-	- )																			
	RED (254)		1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (255)		1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (000)	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (001)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
GREEN																										
	GREEN (254)		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN (255)		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	BLUE (000)	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (001)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
BLUE																										
	BLUE (254)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE (255)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Ver. 1.0 JAN. 20. 2012 17 / 39






## **Product Specification**

## **3-6. Power Sequence**

## **3-6-1. Power Sequence**

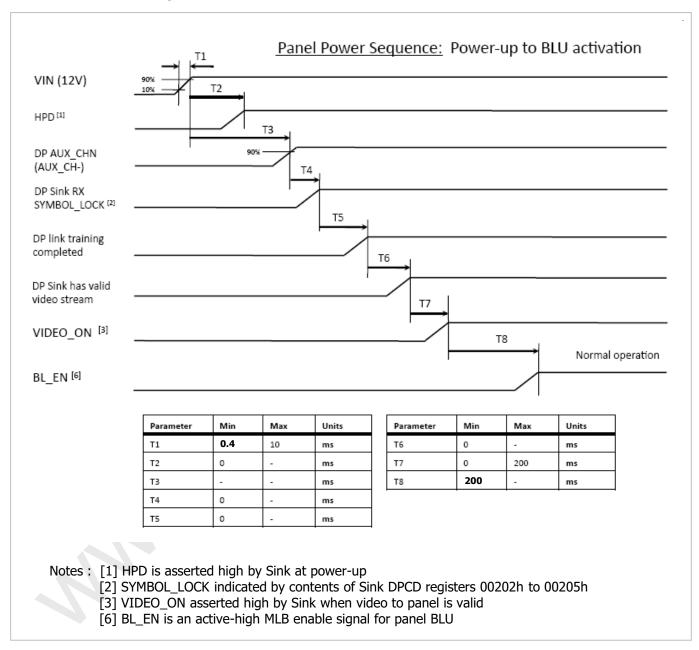

Notes: 1. Please avoid floating state of interface signal at invalid period.

- 2. When the interface signal is invalid, be sure to pull down the power supply for LCD  $V_{\text{LCD}}$  to 0V.
- 3. LED power must be turn on after power supply for LCD and interface signal are valid.

Ver. 1.0 JAN. 20. 2012 18 / 39






## **Product Specification**

## **3-6. Power Sequence**

#### 3-6-1. Power Sequence

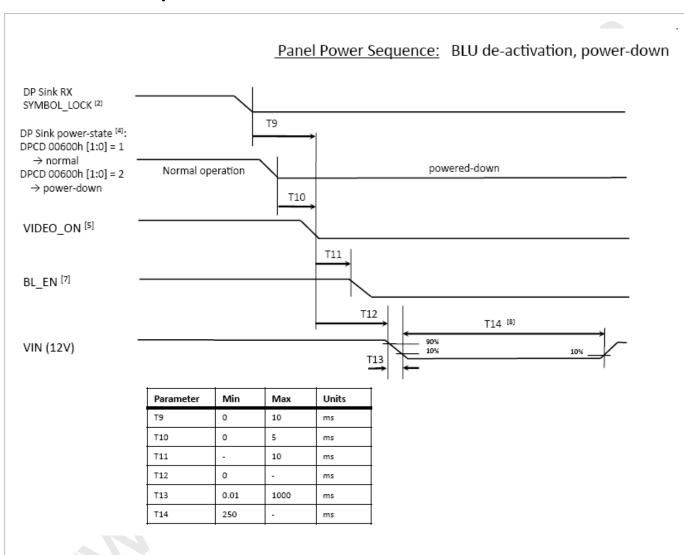

Notes: [2] SYMBOL\_LOCK indicated by contents of Sink DPCD registers 00202h to 00205h

- [4] Power-state set by Source in Sink DPCD register 00600h
- [5] VIDEO\_ON asserted low by Sink because of:
  - 1) loss of SYMBOL\_LOCK or
  - 2) DP Sink is powered down
- [7] BL\_EN must be asserted low by system as rapidly as possible when video is invalid to avoid visible artifacts
- [8] T14 defines minimum off-time for 12V power
- [9] min. times of 0 indicate precedence ordering of events, e.g. where actual timing is TBD

Ver. 1.0 JAN. 20. 2012 19 / 39






## **Product Specification**

## 3-6-2. Power Sequence, EDID Read / Write

\*\*\* This timing is for fabrication purpose only, not for normal operation. \*\*\*

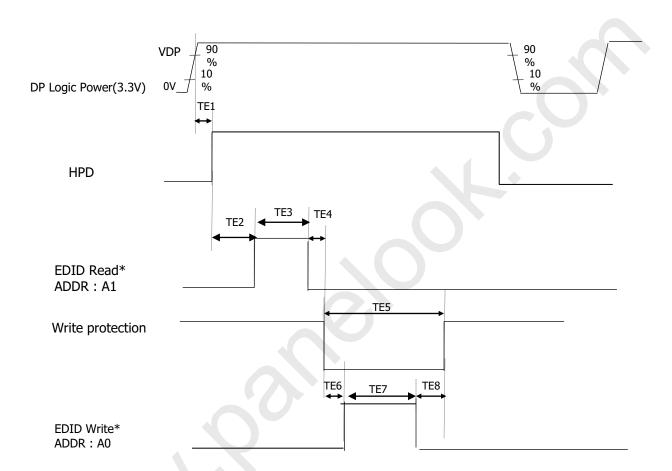

<sup>\*</sup> EDID Read time and EDID write time will be exclusive.

Notes.

In case of without DP signal after DP logic power on, check HPD after TE1 time and if  $\,$  HPD is low status then any time can read EDID

**Table 8.1 POWER SEQUENCE, EDID** 


Parameters.		l laite		
Parameter	Min	Тур	Max	Units
TE1	=	30	50	ms
TE2	1000	-	•	ms
TE3	-	20		ms
TE4	1	-	•	ms
TE5	-	-	2000	ms
TE6	1	=	=	ms
TE7	-	20	=	ms
TE8	1	=	=	ms





# **Product Specification**

## 3-6-3. State Machine

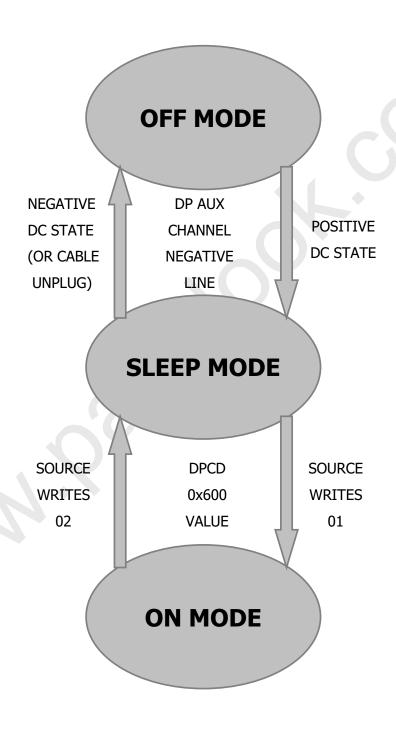

 Ver. 1.0
 JAN. 20. 2012
 21 / 39





# **Product Specification**

## 4. Optical Specifications

Optical characteristics are determined after the unit has been 'ON' for approximately 70 minutes in a dark environment at 25 $\pm$ 2°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of  $\Phi$  and  $\theta$  equal to 0 ° and aperture 1 degree.

FIG. 1 presents additional information concerning the measurement equipment and method.

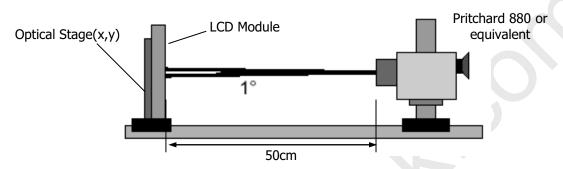


FIG. 1 Optical Characteristic Measurement Equipment and Method

**Table 9. OPTICAL CHARACTERISTICS** 

(Ta=25 °C,  $V_{LCD}$ =12.0V,  $f_V$ =60Hz Dclk=242.28MHz)

	Parame	tor	Symbol		Values		Units	Notes
	raiaiiie	tei	Зуппоот	Min	Тур	Max	Units	Notes
Contrast Ra	tio		CR	700	1000	-		1
Surface Lum	ninance, v	vhite	$L_WH$	380	460	-	cd/m <sup>2</sup>	2,9
Luminance \	/ariation		$\delta$ white			30	%	3
D		Rise Time	Tr <sub>R</sub>	-	6.5	14	ms	4.1
Response Ti	ime	Decay Time	Tr <sub>D</sub>	-	7.5	14	ms	4.1
		RED	Rx		0.652			
			Ry	Ì	0.334			
		GREEN	Gx	1	0.298			
Color Coord	inates		Gy	Typ -0.03	0.619	Typ +0.03		
[CIE1931]		BLUE	Bx		0.150			
			Ву	Ì	0.047			
		WHITE	Wx	Ì	0.313			
			Wy	Ì	0.329			
Calar Chift		Horizontal	$\theta_{CST\_H}$	-	178	-	Dogues	5
Color Shift		Vertical	$\theta_{CST_{L}V}$	-	178	-	Degree	) 3
Viewing Ang	jle (CR>1	0)						
Conoral	Horizor	ntal	$\theta_{H}$	170	178	-	Doores	_
General	Vertica	l	$\theta_{\sf V}$	170	178	-	Degree	6
□££±:	Horizon	tal	$\theta_{GMA\_H}$		178	-	D	_
Effective	Vertical		$\theta_{GMA\_V}$		178	-	Degree	7
Gray Scale					2.2			8

**Ver. 1.0 JAN. 20. 2012** 22 / 39





## **Product Specification**

Notes 1. Contrast Ratio(CR) is defined mathematically as :

$$Contrast \ Ratio = \frac{Surface \ Luminance \ with \ all \ white \ pixels}{Surface \ Luminance \ with \ all \ black \ pixels}$$

It is measured at center point(Location P1)

- 2. Surface luminance(Lwh)is luminance value at 5 points average across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 2.

  Lwh = = Average[Lon1,Lon2,Lon3,Lon4,Lon5]
- 3. The variation in surface luminance ,  $\delta$  WHITE is defined as :

$$\delta_{\textit{WHITE}} = \frac{\text{Maximum}(L_{\text{on1}}, L_{\text{on2}}, \dots, L_{\text{on13}}) - \text{Minimum}(L_{\text{on1}}, L_{\text{on2}}, \dots, L_{\text{on13}})}{\text{Average} (L_{\text{on1}}, L_{\text{on2}}, \dots, L_{\text{on5}})} \times 100(\%)$$

Where L1 to L13 are the luminance with all pixels displaying white at 13 locations. For more information see FIG 2.

- 4. Response time is the time required for the display to transition from black to white (Rise Time,  $Tr_R$ ) and from white to black (Decay Time,  $Tr_D$ ). For additional information see FIG 3
- 5. Color shift is the angle at which the color difference is lower than 0.04. For more information see FIG 4.
  - Color difference (Δu'v')

$$u' = \frac{4x}{-2x + 12y + 3} \qquad v' = \frac{9y}{-2x + 12y + 3}$$

$$\Delta u'v' = \sqrt{(u'_1 - u'_2)^2 + (v'_1 - v'_2)^2} \qquad u'1, v'1 : u'v' \text{ value at viewing angle direction}$$

$$u'2, v'2 : u'v' \text{ value at front } (\theta = 0)$$

- Pattern size: 25% Box size
- Viewing angle direction of color shift: Horizontal, Vertical
- 6. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 5.
- 7. Effective viewing angle is the angle at which the gamma shift of gray scale is lower than 0.3. For more information see FIG 6 and FIG 7.
- 8. Gray scale specificationGamma Value is approximately 2.2. For more information see Table 10.
- 9. 5-lot moving average luminance is minimum 450 cd/m² at center point. (Location P1) 5-lot moving average means the average of lot (n-4), (n-3), (n-2), (n-1) and (n). Lot 1, 2, 3 and 4 individually will meet average 450 cd/m² at center point. (Location P1)





# **Product Specification**

Measuring point for surface luminance  $\,$   $\,$   $\,$  measuring point for luminance variation.

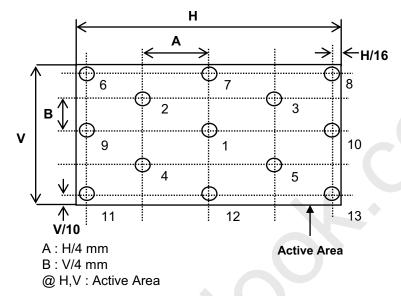


FIG. 2 Measure Point for Luminance

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

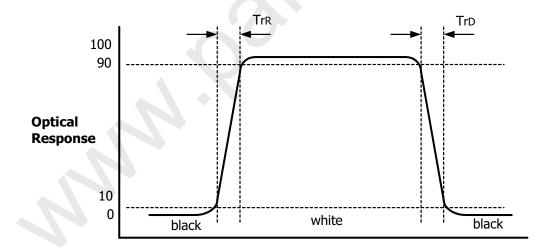


FIG. 3. Response Time


 Ver. 1.0
 JAN. 20. 2012
 24 / 39





# **Product Specification**

Color shift is defined as the following test pattern and color.



25% Box size

FIG. 4 Test Pattern

Average RGB values in Bruce RGB for Macbeth Chart

	Dark skin	Light skin	Blue sky	Foliage	Blue flower	Bluish green
R	98	206	85	77	129	114
G	56	142	112	102	118	199
В	45	123	161	46	185	178
	Orange	Purplish blue	Moderate red	Purple	Yellow green	Orange yellow
R	219	56	211	76	160	230
G	104	69	67	39	193	162
В	24	174	87	86	58	29
	Blue	Green	Red	Yellow	Magenta	cyan
R	26	72	197	241	207	35
G	32	148	27	212	62	126
В	145	65	37	36	151	172
	White	Neutral 8	Neutral 6.5	Neutral 5	Neutral 3.5	black
R	240	206	155	110	63	22
G	240	206	155	110	63	22
В	240	206	155	110	63	22

**Ver. 1.0 JAN. 20. 2012** 25 / 39





# **Product Specification**

Dimension of viewing angle range.


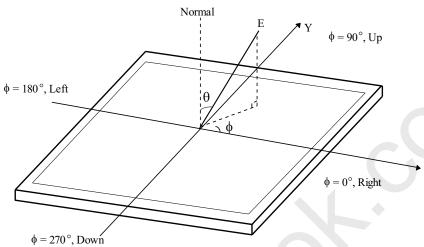


FIG. 5 Viewing angle



2.5 Linear Regression: y = γ x + b b = log(a) = -3.185 ± 0.043 γ = 2.173 ± 0.021 (r = 0.99978)

1.5 1.0 0.5 0 1.4 1.6 1.8 2.0 2.2 2.4 2.6 Log Command-Level Value, x = log(V)

FIG. 6 Sample Luminance vs. gray scale (using a 256 bit gray scale)

FIG. 7 Sample Log-log plot of luminance vs. gray scale

$$L = aV^r + L_b \qquad \log(L - L_b) = r\log(V) + \log(a)$$

Here the Parameter  $\alpha$  and  $\gamma$  relate the signal level V to the luminance L. The GAMMA we calculate from the log-log representation (FIG. 7)





# **Product Specification**

**Table 10. Gray Scale Specification** 

Gray Level	Relative Luminance [%] (Typ.)
0	0.10
31	1.08
63	4.71
95	11.5
127	21.7
159	35.5
191	53.1
223	74.5
255	100





# **Product Specification**

## 5. Mechanical Characteristics

The contents provide general mechanical characteristics. In addition the figures in the next page are detailed mechanical drawing of the LCD.


	Horizontal	630.0mm			
Outline Dimension	Vertical	376.13mm			
	Depth	19.8mm			
Bezel Area	Horizontal	601.7mm			
Dezei Alea	Vertical	340.7mm			
Active Dieplay Area	Horizontal	596.74mm			
Active Display Area	Vertical	335.66mm			
Weight	4050 g (Typ.)				
Surface Treatment	Hard coating(2H) Glare, Low Reflection treatment of the front polarizer				

Notes: Please refer to a mechanic drawing in terms of tolerance at the next page.





# Product Specification

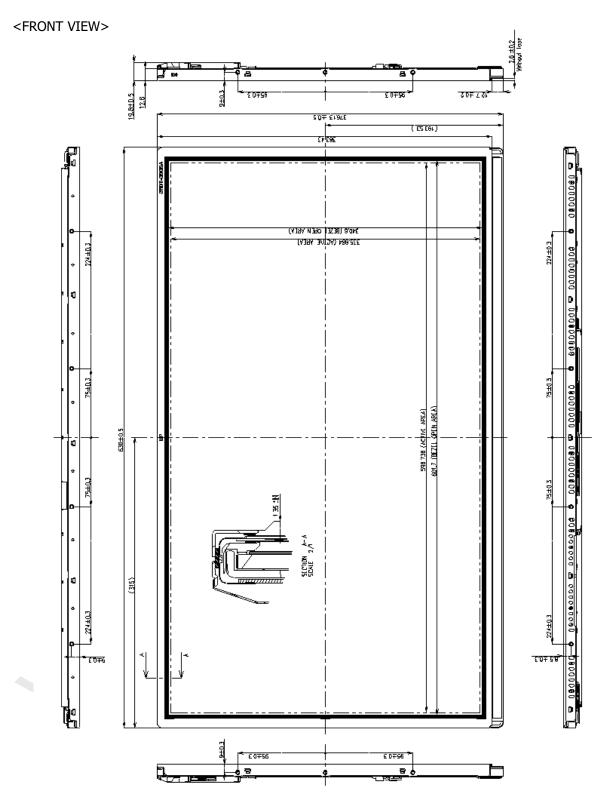


**Ver. 1.0 JAN. 20. 2012** 29 / 39





# **Product Specification**

<REAR VIEW>

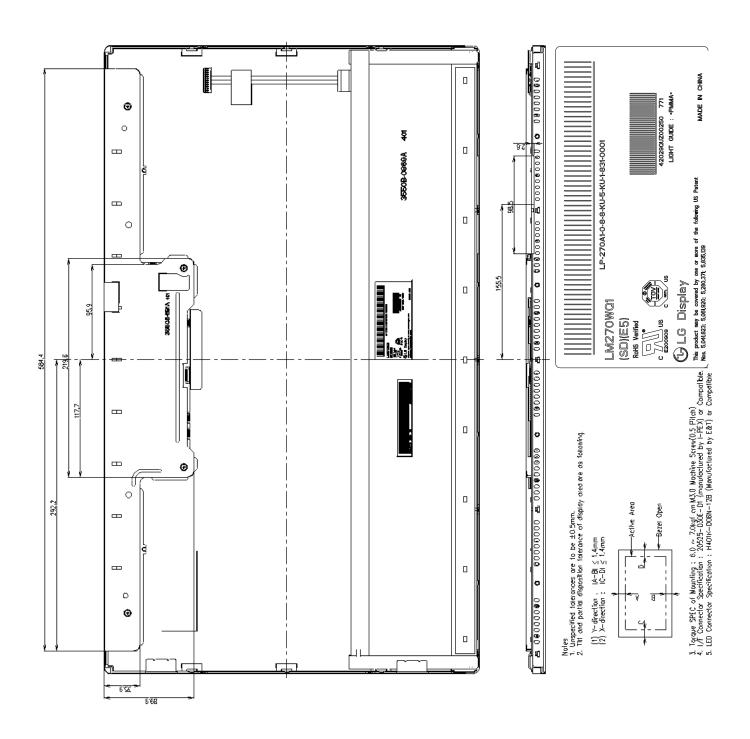

**Ver. 1.0 JAN. 20. 2012** 30 / 39





# **Product Specification**

# 6. Reliability

Environment test condition

No	Test Item	Condition					
1	High temperature storage test	Ta= 60°C 240h					
2	Low temperature storage test	Ta= -20°C 240h					
3	High temperature operation test	Ta= 50°C 50%RH 240h					
4	Low temperature operation test	Ta= 0°C 240h					
5	Vibration test (non-operating)	Wave form: random Vibration level: 1.0G RMS Bandwidth: 10-300Hz Duration: X,Y,Z, 10 min One time each direction					
6	Shock test (non-operating)	Shock level : 100Grms Waveform : half sine wave, 2ms Direction : $\pm X$ , $\pm Y$ , $\pm Z$ One time each direction					
7	Altitude Operating Storage / Shipment	0 - 10,000 feet(3,048m) 0 - 40,000 feet(12,192m)					





## **Product Specification**

#### 7. International Standards

#### 7-1. Safety

- a) UL 60950-1, Second Edition, Underwriters Laboratories Inc.
  Information Technology Equipment Safety Part 1 : General Requirements.
- b) CAN/CSA C22.2 No.60950-1-07, Second Edition, Canadian Standards Association. Information Technology Equipment Safety Part 1 : General Requirements.
- c) EN 60950-1:2006 + A11:2009, European Committee for Electrotechnical Standardization(CENELEC). Information Technology Equipment Safety Part 1 : General Requirements.
- d) IEC 60950-1:2005, Second Edition, The International Electrotechnical Commission (IEC). Information Technology Equipment Safety Part 1 : General Requirements. (Including report of IEC60825-1:2001 clause 8 and clause 9)

#### Notes

1. Laser (LED Backlight) Information

Class 1M LED Product IEC60825-1: 2001 Embedded LED Power (Class 1M)

- 2. Caution
  - : LED inside.

Class 1M laser (LEDs) radiation when open.

Do not open while operating.

#### 7-2. EMC

- a) ANSI C63.4 "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz." American National Standards Institute (ANSI), 2003.
- b) CISPR 22 "Information technology equipment Radio disturbance characteristics Limit and methods of measurement." International Special Committee on Radio Interference (CISPR), 2005.
- c) CISPR 13 "Sound and television broadcast receivers and associated equipment Radio disturbance characteristics – Limits and method of measurement." International Special Committee on Radio Interference (CISPR), 2006.

#### 7-3. Environment

a) RoHS, Directive 2002/95/EC of the European Parliament and of the council of 27 January 2003

Ver. 1.0 JAN. 20. 2012 32 / 39





# **Product Specification**

## 8. Packing

## 8-1. Designation of Lot Mark

a) Lot Mark

A B C D E F G H I J K L M

A,B,C : SIZE(INCH) D : YEAR

E: MONTH  $F \sim M$ : SERIAL NO.

#### Note

#### 1. YEAR

Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Mark	А	В	С	D	Е	F	G	Ŧ	J	K

#### 2. MONTH

	Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Γ	Mark	1	2	3	4	5	6	7	8	9	A	В	С

#### b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module. This is subject to change without prior notice.

#### 8-2. Packing Form

a) Package quantity in one box : 7ea

b) Box Size :  $700 mm \ X \ 355 mm \ X \ 430 mm$ 





## **Product Specification**

#### 9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

#### 9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

#### 9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the miss-operation of circuits. It should be lower than following voltage :  $V=\pm 200 \text{mV}(\text{Over and under shoot voltage})$
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In higher temperature, it becomes lower.)

  And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- (7) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- (8) A screw which is fastened up the steels should be a machine screw. (if not, it causes metallic foreign material and deal LCM a fatal blow)
- (9) Please do not set LCD on its edge.
- (10) Partial darkness may happen during  $3\sim5$  minutes when LCM is operated initially in condition that luminance is under 40% at low temperature (under  $5^{\circ}$ C). This phenomenon which disappears naturally after  $3\sim5$  minutes is not a problem about reliability but LCD characteristic

Ver. 1.0 JAN. 20. 2012 34 / 39





## **Product Specification**

## 9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

## 9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

#### 9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

#### 9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Ver. 1.0 JAN. 20. 2012 35 / 39





# **Product Specification**

#### **10. EDID DATA**

#### 10-1. EDID Data

LM270WQ1-SDE1 EDID DATA (2560X1440 @ 60Hz ) Modified ::								
yte#	Byte#	Field Name and Comments	Value	Value	Value			
cimal)	(HEX)	Heid Maine and Comments	(HEX)	(binary)	(DEC)			
0	00	Header	00	00000000	0			
1	01	Header	FF	11111111	255			
2	. 02	Header	FF	11111111	255			
3	03	Header	FF	11111111	255	Header		
4	04	Header	FF	11111111	255			
5	05	Header	FF	111111111	255			
<u>6</u>	06 07	Header	FF	111111111	255			
7		Header	00	00000000	<u>°</u>  -			
9	08	EISA manufacture code ( 3 Character ID ) APP	06 10	00000110 00010000	6			
	09 0A	EISA manufacture code (Compressed ASC II )  Panel Supplier Reserved - Product Code A008h	_	00010000	16	1 6		
10			08		. 8	product ID for LM270WQ1-SDE1 =		
11	0B	( Hex. LSB first )	00 00	10100000	160	0xA008		
12	00	32-bit serial #		00000000	0	Vender/		
13	0D		00	00000000	0	Product ID		
14	0E		00		0			
15	0F		00	00000000	0			
16	10	Week of Manufacture	2D	00101101	45			
17	11	Year of Manufacture 2010 years	14	00010100	20	EDITO :		
18	12	EDID structure version #= 1	01	00000001	1	EDID Version/		
19	13	EDID revision # = 4	04	00000100	4	Revision		
0	14	Video input Definition = DisplayPort 10bit	B5	10110101	181	Diselect		
21	15	Max H image size (Rounded cm) = 60 cm	3C 22	00111100	60	Display Darameter		
23	16	Max V image size (Rounded cm) = 34 cm Display gamma = (gamma*100)-100 = Example:(2,2*100)-100=1	78	00100010 01111000	34 120	Parameter		
	1/	Feature Support [ Display Power Management(DPM) : No_stanby,No_suspend,	<u>'°</u>	01111000	120			
24	18	Active Off/Very Low Power., Display Color Type: Monochrome of Grayscale	22	00100010	- 1			
	1 **	display. Other Feature Support Flags: No_sRGB, Preferred Timing Mode, No Display is continuous frequency (Multi-mode Base EDID and Extension		00100010	34			
25	19	Red/Green Low Bits (RxRy/GxGy)	6F	01101111	111			
26	1A	Blue/White Low Bits (BxBy/WxWy)	B1	10110001	177			
27	1B	Red X Rx = 0.653	A7	10100111	167			
28	10	Red Y Ry = 0.334	55	01010101	85			
29	1D	Green X Gx = 0.30	4C	01001100	76	Color		
30	1E	Green Y Gy = 0.620	9E	10011110	158	Characteristic		
31	1F	Blue X Bx = 0.146	25	00100101	37			
32	20	Blue Y By = 0.050	0C	00001100	12			
33	21	White X Wx = 0.313	50	01010000	80			
34	22	White Y Wy = 0.329	54	01010100	84			
35	23	Established timing 1 (00h if not used)	00	00000000	0	Established		
36	24	Established timing 2 (00h if not used)	00	00000000	0	Timings		
37	25	Manufacturer's timings	00	00000000	0			
38	26	Standard timing ID1 (01h if not used)	01	00000001	1			
39	27	Standard timing ID1 (01h if not used)	01	00000001	1			
40	28	Standard timing ID2 (01h if not used)	01	00000001	1			
41	29	Standard timing ID2 (01h if not used)	01	00000001	1			
12	2A	Standard timing ID3 (01h if not used)	01	00000001	1			
<b>4</b> 3	2B	Standard timing ID3 (01h if not used)	01	00000001	1			
14	2C	Standard timing ID4 (01h if not used)	01	00000001	1	Standard		
45	2D	Standard timing ID4 (01h if not used)	01	00000001	îl	Timing ID		
46	2E	Standard timing ID5 (01h if not used)	01	00000001	1	-		
47	2F	Standard timing ID5 (01h if not used)	01	00000001	1			
48	30	Standard timing ID6 (01h if not used)	01	00000001	1			
49	31	Standard timing ID6 (01h if not used)	01	00000001	1			
50	32	Standard timing ID7 (01h if not used)	01	00000001	1			
51	33	Standard timing ID7 (01h if not used)	01	00000001	1			
52	34	Standard timing ID8 (01h if not used)	01	00000001	1			
25 33	35	Standard timing ID8 (01h ir not used)	01	00000001	1			
54	36	Detailed timing/monitor	56	01010110	86			
55 55	37	Pixel Clock = 241.5 MHz	5E	01010110	94			
56	38	Hor active= 2560 pixels	00	00000000	94			
,0 57	39	Hor blanking= 160 pixels	A0	10100000	160			
:: 58	3A		A0	10100000	160			
 59	3B	Vertcal active= 1440 lines	A0	10100000	160			
50	3C	Vertical blanking= 41 lines	29	00101001	41	Detailed		
51	3D	*	50	01010000	80	Timing		
52	3E	H sync. Offset= 48 pixels	30	00110000	48	Description		
63	3F	H sync. Width= 32 pixels	20	00100000	32	#1		
54	40	V sync. Offset=3 lines	35	00110101	53			
65	41	V sync. Width= 5 lines	00	00000000	0			
66	42	H image size= 597 mm	55	01010101	85			
67	43	V image size = 336 mm	50	01010000	80			
68	44		21	00100001	33			
59	45	No Horizontal Border	00	00000000	0			
70	46	No Vertical Border	00	00000000	0			
71	47	Non-Interlace, Normal display, no stereo, Digital Separate [ Vsync NEG, Hsync P	1A	00011010	26			

**Ver. 1.0 JAN. 20. 2012** 36 / 39





# **Product Specification**

72						
	48	1280x720p Timing	1A	00011010	26	T T
73	49	Pixel Clock = 74.5 MHz	1D	00011101	29	
			w			
74	4A	Horizontal Active = 1280 Pixels	00	00000000	. 0	
75	4B	Horizontal Blanking = 384 Pixels	80	10000000	128	
76	40		51	01010001	81	
77	4D	Vertical Avtive = 720 Lines	D0	11010000	208	
						But after I
78	4E	Vertical Blanking = 28 Lines	1⊂	00011100	28	Detailed
79	4F		20	00100000	32	Timing
80	50	Horizontal Sync. Offset = 64 Pixels	40	01000000	64	Description
81	51	Horizontal Sync Pulse Width = 128 Pixels	80	10000000	128	#2
						# <u></u>
82	52	V sync. Offset=3 lines	35	00110101	53	
83	53	V sync. Width= 5 lines	00	00000000	. 0	
84	54	H image size= 597 mm	55	01010101	85	
85	55	V image size = 336 mm	50	01010000	1 80	
		o image size — 550 mm				
86	56		21	00100001	33	
87	57	No Horizontal Border	00	00000000	0	
88	58	No Vertical Border	00	00000000	1 0	
89	59	Non-Interlace, Normal display, no stereo, Digital Separate [ Vsync_NEG, Hsync_PC	1⊂	00011100	28	
		Detailed timing/monitor	00		1 0	
90	5A			00000000		
91	5B	descriptor #3	00	00000000	0	
92	5⊂		00	00000000	0	
93	5D		FC	11111100	1 252	
			00			I
94	5E			00000000	. 0	<b>I</b>
95	5F		69	01101001	105	<b>I</b>
96	60		4D	01001101	77	Detailed
97	61		61	01100001	97	Timing
98				01100011	99	
	62		63			Description
99	63		0A	00001010	10	#3
100	64		20	00100000	32	I
101	65		20	00100000	32	Ascii Data String:
102			20	00100000	32	
	66					LM270WQ1-SDA2
103	67		20	00100000	32	
104	68		20	00100000	32	
105	69		20	00100000	32	
106	6A		20	00100000	32	
107	6B		20	00100000	32	
108	6⊂	Detailed timing/monitor	00	00000000	0	
109	6D	descriptor #4	00	00000000	] 0	
110	6E	Color LCD	00	00000000	1 6	
		Color ECD				
111	6F		00	00000000	. 0	
112	70		00	00000000	] 0	
113	71		00	00000000	1 0	
						Partie d
114	72		. 00	00000000	. 0	Detailed
115	73		00	00000000	0	Timing
116	74		00	00000000	] 0	Description
117	75		00	00000000	Ĭ	#4
						**
118	76		00	00000000	0	
119	77		00	00000000	0	Monitor Name:
120	78		00	00000000	1 0	Color LCD
120						20101 222
				00000000	1 .	
121	79	•	00	00000000	0	
121 122			00	00000000	] 0	
121	79					
121 122 123	79 7A 7B		00 00	00000000 00000000	0	
121 122 123 124	79 7A 7B 7C		00 00 00	00000000 00000000 00000000	0 0	
121 122 123 124 125	79 7A 7B 7C 7D		00 00 00 00	00000000 00000000 00000000 00000000	0 0	
121 122 123 124	79 7A 7B 7C	Extension Flag = 01	00 00 00	00000000 00000000 00000000	0 0	Extension Flag
121 122 123 124 125 126	79 7A 7B 7C 7D 7D		00 00 00 00 00	00000000 00000000 00000000 00000000 0000	0 0 0 0 1	
121 122 123 124 125 126 127	79 7A 7B 7C 7D 7D 7E <b>7F</b>	Checksum	00 00 00 00 01 8C	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 140	Extension Flag Checksum
121 122 123 124 125 126 127	79 7A 7B 7C 7D 7E 7F 80	Checksum Tag	00 00 00 00 01 <b>8C</b> 02	00000000 00000000 00000000 00000000 0000	0 0 0 1 140 2	
121 122 123 124 125 126 127	79 7A 7B 7C 7D 7D 7E <b>7F</b>	Checksum Tag Revision Number	00 00 00 00 01 8C	00000000 00000000 00000000 00000000 0000	0 0 0 1 140 2 3	
121 122 123 124 125 126 127	79 7A 7B 7C 7D 7E 7F 80	Checksum Tag	00 00 00 00 01 <b>8C</b> 02	00000000 00000000 00000000 00000000 0000	0 0 0 1 140 2	
121 122 123 124 125 126 127 128 129	79 7A 7B 7C 7D 7E 7F 80 81 82	Checksum Tag Revision Number Offset of first Detailed Timing Description	00 00 00 00 01 <b>8C</b> 02 03 0C	00000000 00000000 00000000 00000000 0000	0 0 0 1 140 2 3	
121 122 123 124 125 126 127 128 129 130 131	79 7A 7B 7C 7D 7E 7F 80 81 82 83	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats	00 00 00 01 8C 02 03 0C C1	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 140 2 3 12 193	
121 122 123 124 125 126 127 128 129 130 131	79 7A 7B 7C 7D 7E 7F 80 81 82 83 84	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag	00 00 00 00 01 <b>8C</b> 02 03 0C C1 23	00000000 00000000 00000000 00000000 10001100 000000	0 0 0 1 140 2 3 122 193 35	
121 122 123 124 125 126 127 128 129 130 131	79 7A 7B 7C 7D 7E 7F 80 81 82 83	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats	00 00 00 01 8C 02 03 0C C1	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 140 2 3 12 193	
121 122 123 124 125 126 127 128 129 130 131 132 133	79 7A 7B 7C 7D 7E 80 81 82 83 84 85	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1	00 00 00 00 01 8C 02 03 0C C1 23	00000000 00000000 00000000 00000000 10000100 000000	0 0 0 1 140 2 3 122 193 35	
121 122 123 124 125 126 127 128 129 130 131	79 7A 7B 7C 7D 7E 7F 80 81 82 83 84	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag	00 00 00 00 01 <b>8C</b> 02 03 0C C1 23	00000000 00000000 00000000 00000000 10001100 000000	0 0 0 1 140 2 3 12 193 35	
121 122 123 124 125 126 127 128 129 130 131 132 133	79 7A 7B 7C 7D 7E 80 81 82 83 84 85	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1	00 00 00 00 01 8C 02 03 0C C1 23	00000000 00000000 00000000 00000000 10000100 000000	0 0 0 1 140 2 3 122 193 35	
121 122 123 124 125 126 127 128 129 130 131 132 133	79 7A 7B 7C 7D 7E 7F 80 81 82 83 84 85 86	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag	00 00 00 00 01 8C 02 03 0C C1 23 09	00000000 00000000 00000000 00000000 10000100 000000	0 0 0 1 140 2 3 12 193 35 9	
121 122 123 124 125 126 127 128 129 130 131 132 133 134	79 7A 7B 7C 7D 7E 80 81 82 83 84 85 86	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1	00 00 00 00 01 8C 02 03 0C C1 23 09 07	00000000 00000000 00000000 000000001 10001100 000000	0 0 0 1 140 2 3 122 193 35 9	
121 122 123 124 125 126 127 128 129 130 131 132 133	79 7A 7B 7C 7D 7E 7F 80 81 82 83 84 85 86	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag	00 00 00 00 01 8C 02 03 0C C1 23 09	00000000 00000000 00000000 000000001 10001100 000000	0 0 0 1 140 2 3 12 193 35 9	
121 122 123 124 125 126 127 128 129 130 131 132 133 134	79 7A 7B 7C 7D 7E 7F 80 81 82 83 84 85 86	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1	00 00 00 00 00 01 8C 03 0C C1 23 09 07	00000000 00000000 00000000 000000001 10001100 00000011 00000110 00100011 00001001 00000111 00000111 00000111	0 0 0 0 0 1 1 1400 2 3 3 122 1933 35 9 7 7 7 131	
121 122 123 124 125 126 127 128 129 130 131 132 133 134 134	79 7A 7B 7C 7D 7E 80 81 82 83 84 85 86 87 88	Checksum Tag Revision Number Offiset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag	00 00 00 00 00 01 8C 02 03 0C C1 23 09 07	00000000 0000000000 000000000 00000000	0 0 0 0 1 140 140 152 153 153 153 153 153 153 153 153 153 153	
121 122 123 124 125 126 127 128 129 130 131 132 133 134	79 7A 7B 7C 7D 7E 7F 80 81 82 83 84 85 86	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1	00 00 00 00 00 01 8C 03 0C C1 23 09 07	00000000 00000000 00000000 000000001 10001100 00000011 00000110 00100011 00001001 00000111 00000111 00000111	0 0 0 0 0 1 1 1400 2 3 3 122 1933 35 9 7 7 7 131	
121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137	79 7A 7B 7C 7D 7E 80 81 82 83 84 85 86 87 88 89	Checksum Tag Revision Number Offiset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag	00 00 00 00 00 01 8C 02 03 0C C1 23 09 07 07	00000000 00000000 00000000 00000000 0000	0 0 0 0 0 0 0 1 1 1400 0 0 0 0 0 0 0 0 0	
121 122 123 124 125 126 127 128 129 130 131 132 133 134 134	79 7A 7B 7C 7D 7E 80 81 82 83 84 85 86 87 88	Checksum Tag Revision Number Offiset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag	00 00 00 00 00 01 8C 02 03 0C C1 23 09 07	00000000 0000000000 000000000 00000000	0 0 0 0 1 140 140 152 153 153 153 153 153 153 153 153 153 153	
121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137	79 7A 7B 7B 7C 7C 7C 7C 7C 7C 80 81 82 83 84 85 86 87 88 89	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Payload	00 00 00 00 00 00 00 00 00 00 00 00 00	00000000 000000000 000000000 10001000 000000	0 0 0 0 0 0 0 1 1 1400 0 0 0 0 0 0 0 0 0	
121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137	79 7A 7B 7C 7D 7E 80 81 82 83 84 85 86 87 88 89	Checksum Tag Revision Number Offiset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag	00 00 00 00 00 01 8C 02 03 0C C1 23 09 07 07	00000000 00000000 00000000 00000000 0000	0 0 0 0 0 0 0 1 1 1400 0 0 0 0 0 0 0 0 0	
121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137	79 7A 7B 7B 7C 7C 7C 7C 7C 7C 80 81 82 83 84 85 86 87 88 89	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Payload	00 00 00 00 00 00 00 00 00 00 00 00 00	00000000 000000000 000000000 10001000 000000	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
121 122 123 124 125 126 127 128 129 131 131 132 133 134 134 135 136 137 138 139	79 7A 7B 7C 7D 7E 7F 80 81 81 82 83 84 85 86 87 88 88 89 88	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Payload Detailed timing/monitor	00 00 00 00 01 8C 02 03 0C C1 23 09 07 07 07 83 01 00 00	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 140 2 3 12 193 35 9 7 7 7 131 1 0 0	
121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 126 137 138 139 140	79 7A 7B 7C 7C 7C 7F 80 81 81 82 83 84 85 86 87 88 89 8A 8B 8C	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Payload Detailed timing/monitor Pixel Clock = 241.5 MHz	00 00 00 00 01 8C 02 03 0C C1 23 09 07 07 07 83 01 00 00 56	00000000 00000000 00000000 00000000 1000000	0 0 0 0 1 140 2 3 3 12 193 35 9 9 131 1 1 0 0 0 866 944	
121 122 123 124 125 126 127 128 129 131 131 132 133 134 134 135 136 137 138 139	79 7A 7B 7C 7D 7E 7F 80 81 81 82 83 84 85 86 87 88 88 89 88	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Payload Detailed timing/monitor	00 00 00 00 01 8C 02 03 0C C1 23 09 07 07 07 83 01 00 00	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 140 2 3 12 193 35 9 7 7 7 131 1 0 0	
121 122 123 124 125 127 128 129 130 131 132 133 134 135 136 137 138 139 140	79 7A 7A 7E 7C 7C 7C 7C 7F 80 81 82 83 84 85 86 87 87 88 88 89 80 80 80 80 80 80	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Data Block Tag Detailed timing/monitor Dixel Clock = 241.5 MHz Hor active= 2560 pixels	00 00 00 00 01 8C 02 03 0C C1 23 09 07 07 07 83 01 00 00	00000000 00000000 00000000 00000000 0000	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
121 122 123 124 125 127 128 129 130 131 132 133 134 135 136 137 138 139 140	79 7A 7B 7C 7C 7D 7E 7F 7F 7F 78 80 81 82 83 84 85 86 87 88 89 8A 8B 8C 8C	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Payload Detailed timing/monitor Pixel Clock = 241.5 MHz	00 00 00 00 01 8C 02 03 0C C1 23 09 07 07 83 01 00 00 00 56	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 140 2 3 3 12 2 193 35 9 9 7 7 7 131 1 0 0 0 160 160 160 160 160 160 160 16	
121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140	79 7A 7A 7E 7C 7D 7E 80 81 82 83 84 85 86 87 88 89 88 89 8A 8B 8C 8D 8E 8P	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Payload Detailed timing/monitor Pixel Clock = 241.5 MHz Hor active= 2560 pixels Hor blanking= 160 pixels	00 00 00 00 01 02 03 03 0C C1 23 09 07 07 83 01 00 00 00 56	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 1 140 12 12 133 35 3 9 1 131 1 1 0 0 0 1600 1660 1660 1660 1 1 1 1	
121 122 123 124 125 127 128 129 130 131 132 133 134 135 136 137 138 139 140	79 7A 7B 7C 7C 7D 7E 7F 7F 7F 78 80 81 82 83 84 85 86 87 88 89 8A 8B 8C 8C	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Data Block Tag Detailed timing/monitor Dixel Clock = 241.5 MHz Hor active= 2560 pixels	00 00 00 00 01 8C 02 03 0C C1 23 09 07 07 83 01 00 00 00 56	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 1 140 12 12 133 35 3 9 1 131 1 1 0 0 0 1600 1660 1660 1660 1 1 1 1	
121 122 123 124 125 126 127 128 129 130 131 131 132 133 134 135 136 137 138 139 140	79 7A 7B 7C 7D 7C 7D 80 81 82 83 84 85 86 87 88 89 8A 88 8C 8D 8E 8F	Checksum Tag Revision Number Offiset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Data Block Tag Detailed timing/monitor Pixel Clock = 241.5 MHz Hor active= 2560 pixels Hor blanking= 160 pixels Vertcal active= 1440 lines	00 00 00 00 01 02 03 00 C1 23 09 07 07 83 01 00 00 05 56	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 1 140 12 13 3 12 13 13 13 15 1 1 0 0 160 160 160 160 160 160 160 160	Checksum
121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140	79 7A 7A 7E 7C 7D 7E 80 81 82 83 84 85 86 87 88 89 88 89 8A 8B 8C 8D 8E 8P	Checksum Tag Revision Number Offset of first Detailed Timing Description Device Support & No. of Native Formats Audio Data Block Tag CEA Short Video Descriptor 1 Audio Data Block Tag CEA Short Audio Descriptor 1 Speaker Allocation Data Block Tag Speaker Allocation Payload Detailed timing/monitor Pixel Clock = 241.5 MHz Hor active= 2560 pixels Hor blanking= 160 pixels	00 00 00 00 01 02 03 03 0C C1 23 09 07 07 83 01 00 00 00 56	00000000 00000000 00000000 00000000 0000	0 0 0 0 1 1 140 12 12 133 35 3 9 1 131 1 1 0 0 0 1600 1660 1660 1660 1 1 1 1	Checksum

**Ver. 1.0 JAN. 20. 2012** 37 / 39





# **Product Specification**

147	93		50	01010000	80	
		11 00				
148		H sync. Offset= 48 pixels	30	00110000	48	
149	95	H sync. Width= 32 pixels	20	00100000	32	
150	96	V sync. Offset=3 lines	35	00110101	53	
151	97	V sync. Width= 5 lines	00	00000000	0	
152	98	H image size= 597 mm	55	01010101	85	
153	99	V image size = 336 mm	50	01010000	80	
154	9A		21	00100001	33	
		N 11 * 115 1				
155	9B	No Horizontal Border	00	00000000	0	
156	90	No Vertical Border	00	00000000	l ol	
157	9D	Non-interlaced, Normal display, No stereo, Digital separate sync, H/V pol Negative	1A	00011010	26	
158	9E	1280x720p Timing	1A	00011010	26	
159	9F	Pixel Clock = 74.5 MHz	1D	00011101	29	
				00000000	1 -61	
160	A0	Horizontal Active = 1280 Pixels	00			
161	A1	Horizontal Blanking = 384 Pixels	80	10000000	128	
162	A2		51	01010001	81	
		11				
163	A3	Vertical Avtive = 720 Lines	D0	11010000	208	
164	A4	Vertical Blanking = 28 Lines	1⊂	00011100	28	
	Ī			Ī	1 I	
165	A5		20	00100000		
105	Mo		20	00100000	l l	
	ļ		<u></u>	<u> </u>	32	
166	A6	Horizontal Sync. Offset = 64 Pixels	40	01000000	64	<b> </b>
167	A7	Horizontal Sync Pulse Width = 128 Pixels	80	10000000	128	
					1 1	<b> </b>
168	A8	V sync. Offset=3 lines	35	00110101	53	<b> </b>
169	A9	V sync. Width= 5 lines	00	00000000	0	
	(,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,					
170	AA	H image size= 597 mm	55	01010101	85	
171	AB	V image size = 336 mm	50	01010000	80	
172	AC		21	00100001	33	
173	AD	No Horizontal Border	00	00000000	0	
174	AE	No Vertical Border	00	00000000		
					0	
175	AF	ace, Normal display, no stereo, Digital Separate ( Vsync_POS, Hs	10	00011100	28	
176	B0	Pixel Clock = 127.75 MHz	E7	11100111	231	
177	B1	Horizontal Active = 1280 pixels	31	00110001	49	
178	B2	Horizontal Blanking = 160 pixels	00	00000000	0	
179	B3	Vertical Active = 1440 lines	A0	10100000	160	
180	B4	Vertical Blanking = 41 lines	50	01010000	80	
					1 1	
181	B5	Horizontal Sync Offset (Front Porch) = 48 Pixels (from blanking	A0	10100000	160	
182	B6	Horizontal Sync Pulse Width = 32 Pixels	29	00101001	41	
100	D7	Vertical Sync Offset = 3 lines		01010000	80	
183	B7		50			
184	B8	Vertical Sync Pulse Width = 10 lines	30	00110000	48	
185	B9	Horizontal Image Size = 597 mm	20	00100000	32	
186	BA	Vertical Image Size = 336 mm	3A	00111010	58	
187	BB	Horizontal Border = 0 Pixels	00	00000000	0	
188	BC	Vertical Border = 0 Lines	55	01010101	85	
189	BD	Vertical Border = 0 Lines	50	01010000	80	
190	BE		21	00100001	] 33	J
191	BF	Calculated Horizontal Refresh = 0.89 kHz	00	00000000	0	
					1 6	
192	C0	Calculated Vertical Refresh = 0.60 Hz	00	00000000		
193	C1		1A	00011010	26	
194	C2		00	00000000	] o	
195	C3		00	00000000	0	l l
196	€4		00	00000000	0	l l
197	C5		00	00000000	l ol	l l
						l l
198	⊂6		00	00000000	0	l l
199	C7		00	00000000	] 0	l l
200	C8		00	00000000	1 0	l l
					اهٔ	l l
201			00	00000000		l l
202	CA		00	00000000	0	l l
203	СВ		00	00000000	l ol	l l
					l ŏ	l l
204	CC.		00	00000000		l l
205	CD		00	00000000	] 0	l l
206	CE		00	00000000	1 ol	l l
	4					l l
207	CF		00	00000000	0	l l
208	D0		00	00000000	0	l l
209	D1		00	00000000	0	l l
						<b> </b>
210	D2		00	00000000	0	l l
211	D3		00	00000000	0	l l
212	D4		00	00000000	1 6	l l
						<b> </b>
213	D5		00	00000000	0	<b> </b>
214	D6		00	00000000	0	l l
215	D7		00	00000000	0	l l
						<b> </b>
216	D8		00	00000000	0	<b> </b>
217	D9		00	00000000	0	l l
218	DA		00	00000000	1 öl	l l
						l l
219	DB		00	00000000	0	l l
220	DC		00	00000000	] 0	l l
221	DD		00	00000000	Ŏ	l l
						l l
222	DE		00	00000000	0	l l
223	DF		00	00000000	0	l l
	E0		00	00000000	ĺ ŏĺ	l l
224						l l
225	E1		00	00000000	] 0	<b> </b>


**Ver. 1.0 JAN. 20. 2012** 38 / 39



Global LCD Panel Exchange Center

LM270WQ1 **Liquid Crystal Display** 

# **Product Specification**

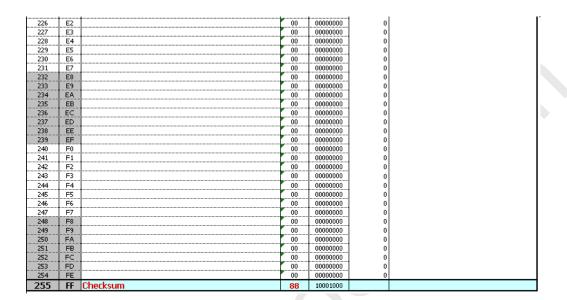

## 10-2. EDID DATA READ/WRITE PROTOCOL

### 10-2-1. READ Operation

<Start><Slave Address, RW=0><Byte Address><Start><Slave Address, RW=1><Data><Stop>

### 10-2-2. WRITE Operation

<Start><Slave Address, RW=0><Byte Address><Data><Stop>

#### - Device Address (Slave Address)

Туре	Device (Slave) Address								Hex
IS24C02B	1	0	1	0	0	0	0	RW	0xA0 + RW

#### - Byte Address

Byte Address						
Decimal	0 ~ 255					
Hex	0x00 ~ 0xFF					