

Three-terminal positive voltage regulator

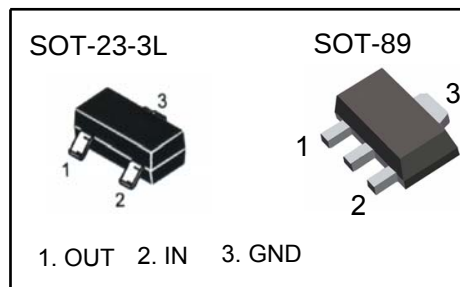
Maximum output current I_O : 0.1 A

Output voltage V_O : 8 V

Continuous total dissipation

P_D : SOT-23-3L 0.35 W ($T_a = 25^\circ\text{C}$)

SOT-89 0.5 W ($T_a = 25^\circ\text{C}$)




ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	$0 \sim +125$	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_I=14\text{V}$, $I_O=40\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)






Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_O	25°C	7.7	8.0	8.3	V
		$10.5\text{V} \leq V_I \leq 23\text{V}$, $I_O=1\text{mA} \sim 40\text{mA}$	7.6	8.0	8.4	V
		$I_O=1\text{mA} \sim 70\text{mA}$				
Load Regulation	ΔV_O	$I_O=1\text{mA} \sim 100\text{mA}$, 25°C		18	80	mV
		$I_O=1\text{mA} \sim 40\text{mA}$, 25°C		10	40	mV
Line regulation	ΔV_O	$10.5\text{V} \leq V_I \leq 23\text{V}$, 25°C		42	175	mV
		$11\text{V} \leq V_I \leq 23\text{V}$, 25°C		36	125	mV
Quiescent Current	I_q	25°C		4	6	mA
Quiescent Current Change	ΔI_q	$11\text{V} \leq V_I \leq 23\text{V}$, $0 \sim 125^\circ\text{C}$			1.5	mA
	ΔI_q	$1\text{mA} \leq I_O \leq 40\text{mA}$, $0 \sim 125^\circ\text{C}$			0.1	mA
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{kHz}$, 25°C		54		μV
Ripple Rejection	RR	$13\text{V} \leq V_I \leq 23\text{V}$, $f=120\text{Hz}$, $0 \sim 125^\circ\text{C}$	37	46		dB
Dropout Voltage	V_d	25°C		1.7		V

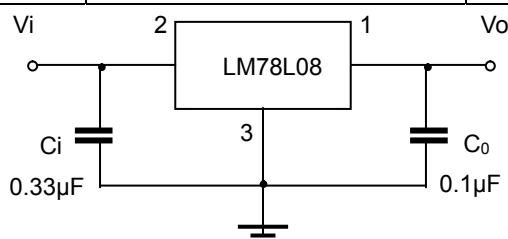TYPICAL APPLICATION



Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

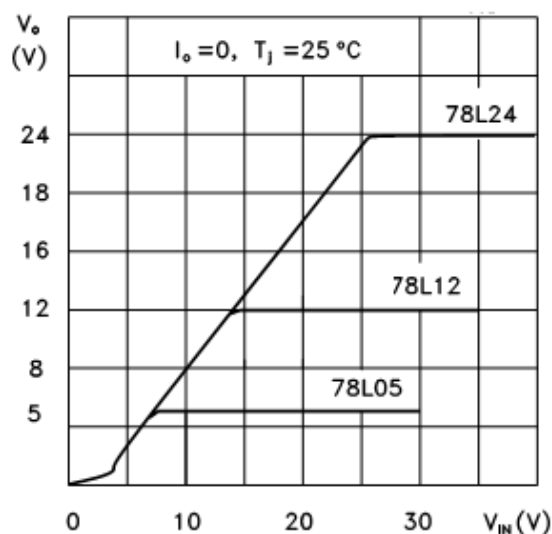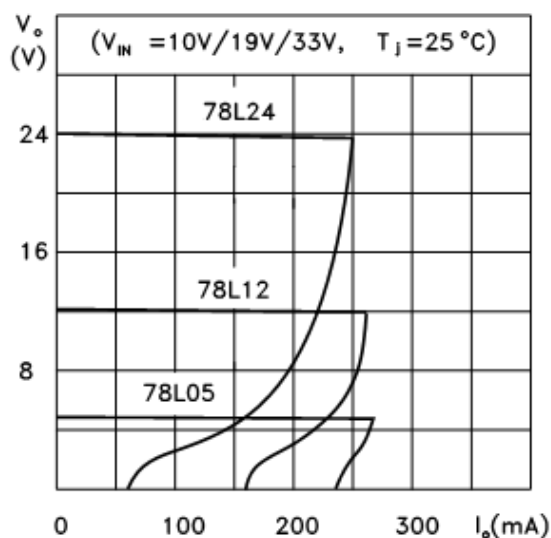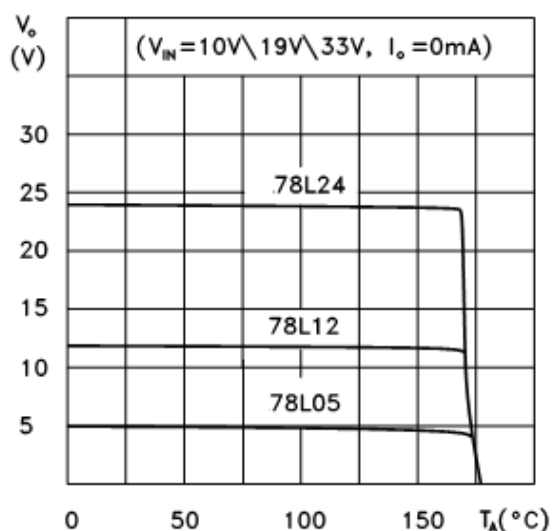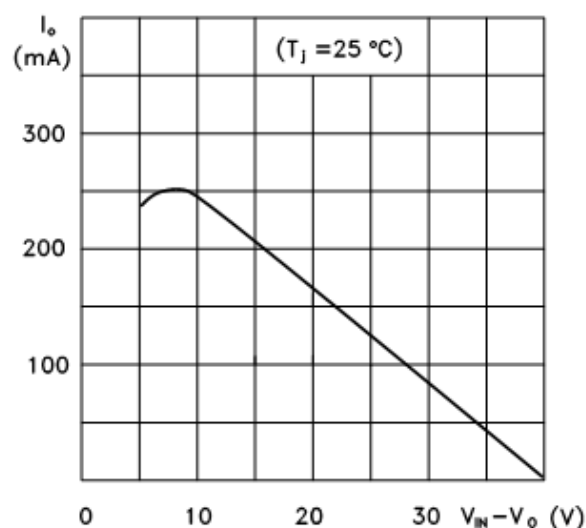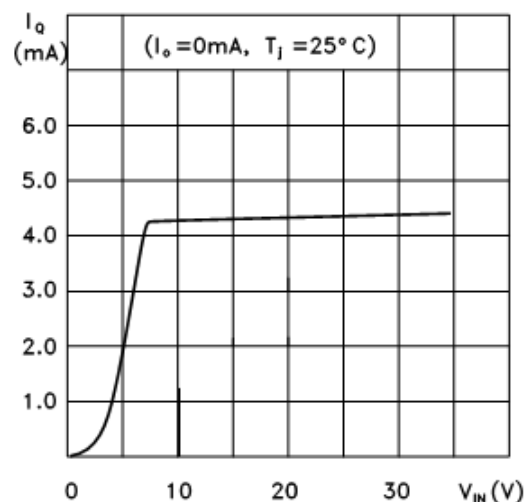Typical Characteristics

78L05/12/24 Output Characteristics

78L05/12/24 Load Characteristics

78L05/12/24 Thermal Shutdown

78L00 Series Short Circuit Output Current

78L05 Quiescent Current vs Input Voltage

PD-TA
