



SEMICONDUCTOR TECHNICAL DATA

LM78M05


BIPOLAR LINEAR INTEGRATED CIRCUIT

THREE TERMINAL POSITIVE VOLTAGE REGULATORS
5V, 8V, 12V, 15V.

LM78M × × Series of three-terminal positive voltage regulators employ built-in current limiting, thermal shutdown, and safe-operating area protection which makes them virtually immune to damage from output overloads. With adequate heatsinking, they can deliver in excess of 0.5A output current.

FEATURES

- Output current in excess of 0.5A.
- No external components.
- Internal thermal overload protection.
- Internal short circuit current limiting.
- Output transistor safe-area compensation.
- Available in DPAK package.

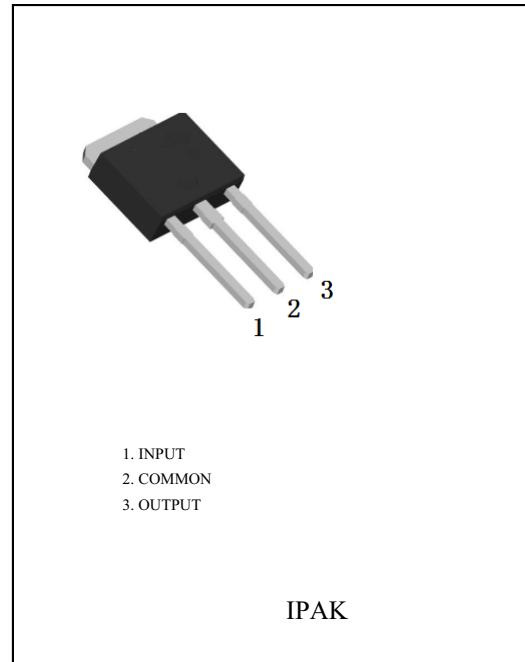


MAXIMUM RATINGS (Ta=25 °C)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|---|------------------|-----------|------|
| Input Voltage | V _{IN} | 35 | V |
| Power Dissipation (T _c =25 °C) | P _D | 12 | W |
| Power Dissipation (Without Heatsink) | P _D | 1.3 | W |
| Operating Junction Temperature | T _j | -40 ~ 150 | °C |
| Storage Temperature | T _{stg} | -55 ~ 150 | °C |
| Soldering Temperature (10 seconds) | T _{sol} | 260 | °C |

LM78M05

EQUIVALENT CIRCUIT

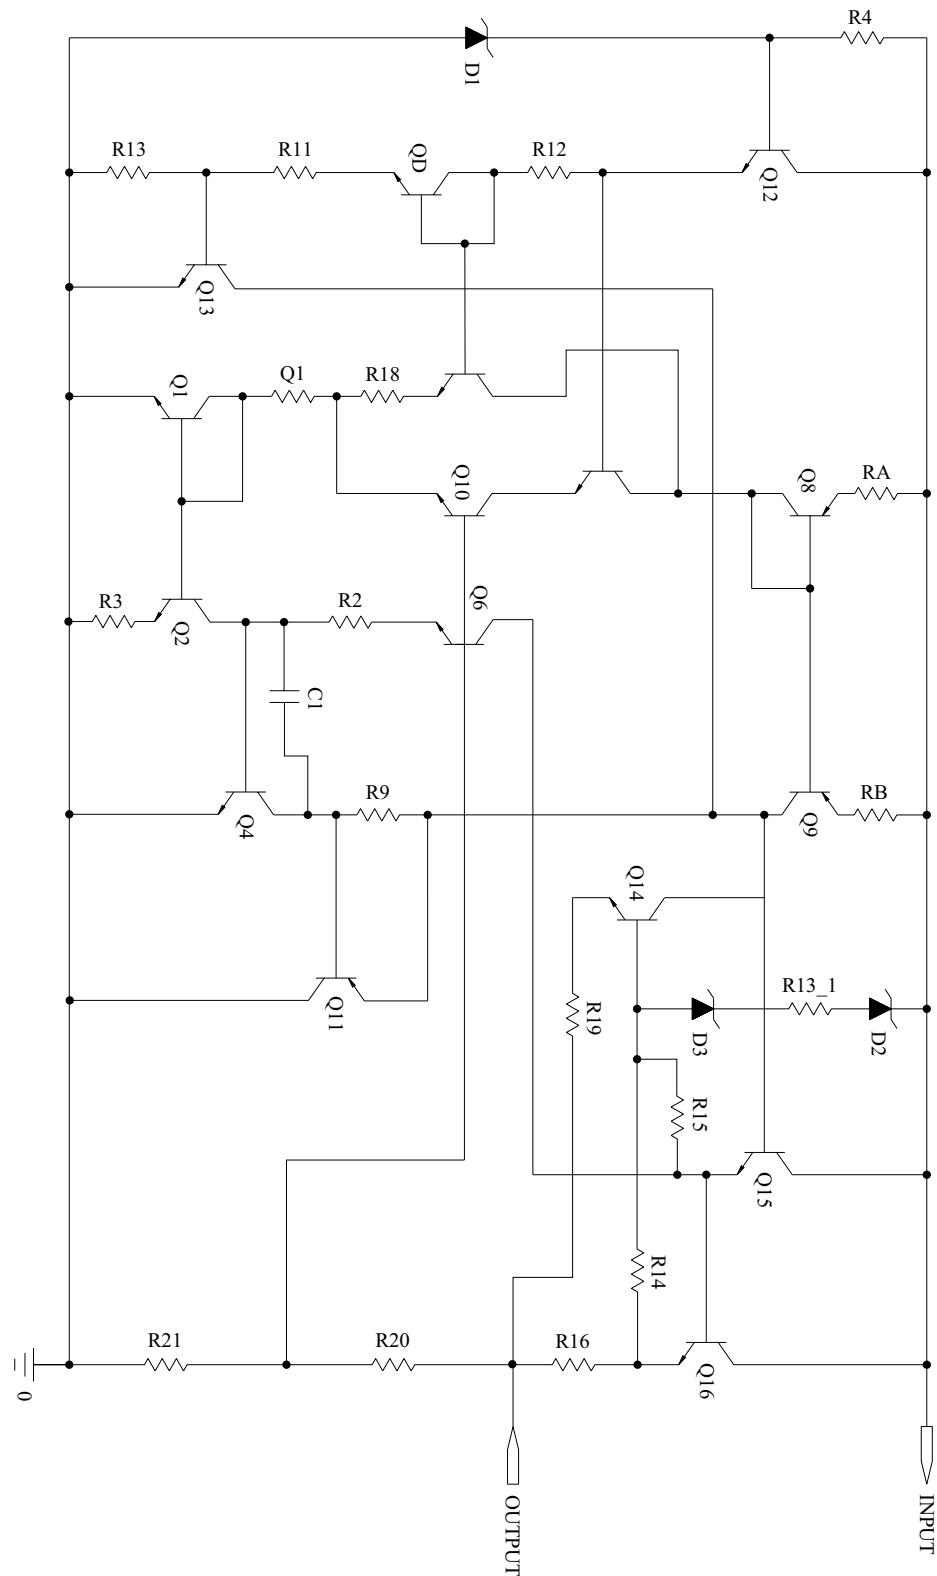

LM78M05

ELECTRICAL CHARACTERISTICS


LM78M05

(unless otherwise specified : $V_{IN}=10V$, $I_{OUT}=350mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$)


| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------|---------------------------|--|------|------|------|---------------|
| Output Voltage | V_{OUT} | $T_j=25^\circ C$ | 4.8 | 5.0 | 5.2 | V |
| | | $5mA \leq I_{OUT} \leq 350mA$ $P_D \leq 7.5W$, $7.5V \leq V_{IN} \leq 20V$ | 4.75 | 5.0 | 5.25 | |
| Line Regulation | Reg Line | $8V \leq V_{IN} \leq 25V$, $I_{OUT}=200mA$ | - | - | 50 | mV |
| | | $7.2V \leq V_{IN} \leq 25V$, $I_{OUT}=200mA$ | - | - | 100 | |
| Load Regulation | Reg Load | $5mA \leq I_{OUT} \leq 500mA$ | - | - | 100 | mV |
| Quiescent Current | I_B | $T_j=25^\circ C$ | - | 4 | 6 | mA |
| Quiescent Current Change | ΔI_B | $5mA \leq I_{OUT} \leq 350mA$ | - | - | 0.5 | mA |
| | | $7.5V \leq V_{IN} \leq 25V$, $I_{OUT}=200mA$ | - | - | 1.0 | mA |
| Output Noise Voltage | V_{NO} | $f=10Hz \sim 100kHz$ | - | 40 | - | μV |
| Ripple Rejection | $R \cdot R$ | $f=120Hz$, $8V \leq V_{IN} \leq 18V$ $I_{OUT}=300mA$ | 62 | 78 | - | dB |
| Dropout Voltage | V_D | $I_{OUT}=500mA$ | - | 2.0 | - | V |
| Short Circuit Current | I_{SC} | $V_{IN}=35V$ | - | 300 | - | mA |
| Output Voltage Drift | $\Delta V_{OUT}/\Delta T$ | $I_{OUT}=5mA$, $T_j=0 \sim 125^\circ C$ | - | -0.5 | - | $mV/^\circ C$ |

LM78M05


PEAK OUTPUT CURRENT

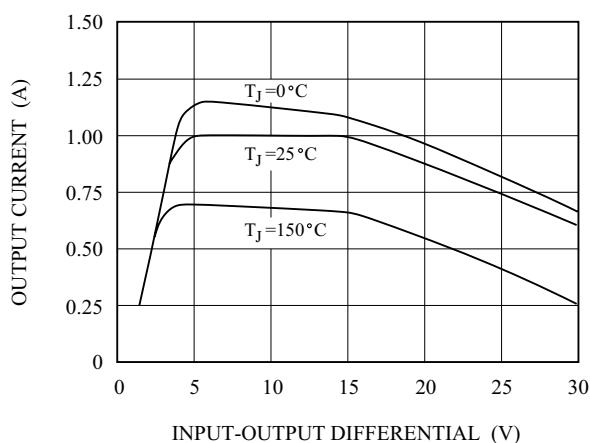


RIPPLE REJECTION

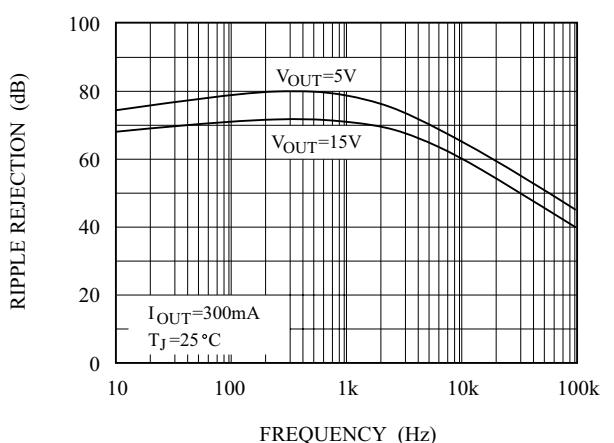


DROPOUT VOLTAGE

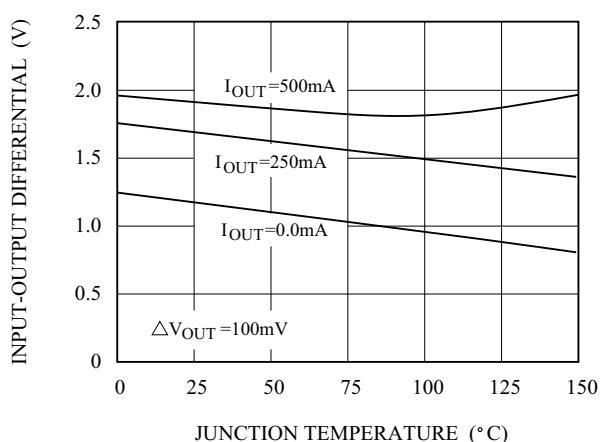


OUTPUT VOLTAGE
(Normalized to 1V at $T_J = 25^\circ\text{C}$)

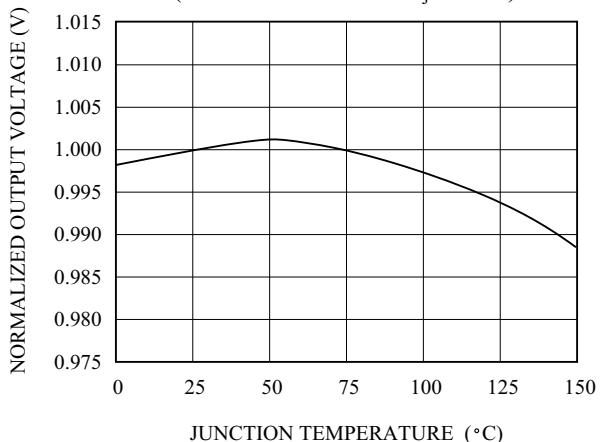


QUIESCENT CURRENT

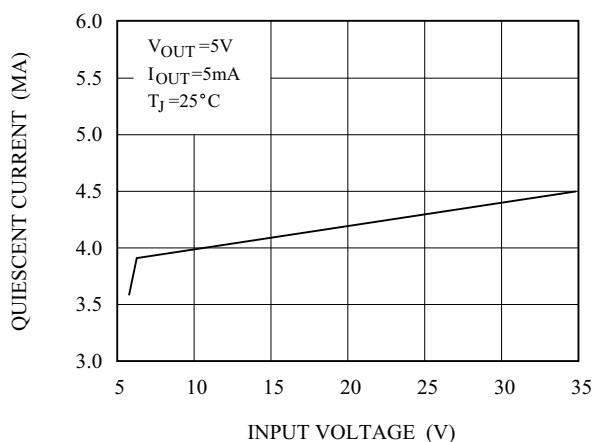

QUIESCENT CURRENT

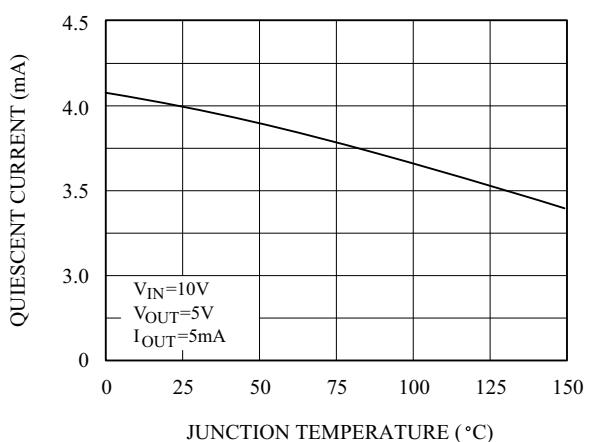

LM78M05

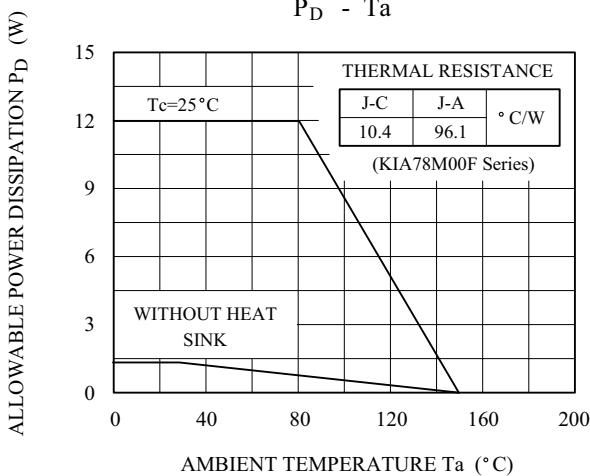


Design Considerations

The KIA78MXX fixed voltage regulator series has built-in thermal overload protection which prevents the device from being damaged due to excessive junction temperature.

The regulators also contain internal short-circuit protection which limits the maximum output current, and safe-area protection for the pass transistor which reduces the short circuit current as the voltage across the pass transistor is increased. Although the internal

power dissipation is automatically limited, the maximum junction temperature of the device must be kept below +150 °C in order to meet data sheet specifications.

An adequate heatsink should be provided to assure this limit is not exceeded under worst-case operating conditions (maximum input voltage and load current) if reliable performance is to be obtained.

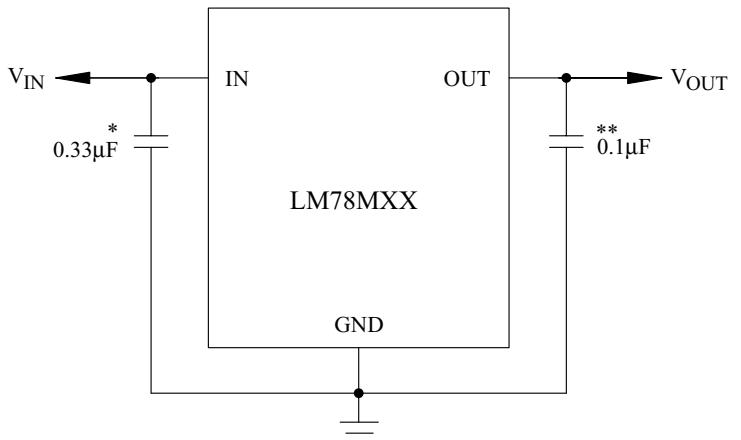

* Required if regulator input is more than 4 inches from input filter capacitor.
(or if no input filter capacitor is used).

** Optional for improved transient response.