



§ SPECIFICATION APPROVAL SHEET §

Fdt Tech Module No LP080N6IB~~X~~-F~~X~~R

Description: 8" Digital TFT-LCD Module

SPEC No.: SAS-1102003

Version: 0.0

Issue Date: February 24, 2011

※ This approval sheet contains 24 pages including the cover and appendix.

Customer:

Date: / / 10

APPROVED BY:

APPROVED BY:


CHECKED BY:

DESIGNED BY:



FLAT DISPLAY TECHNOLOGY

8" Digital TFT-LCD Module

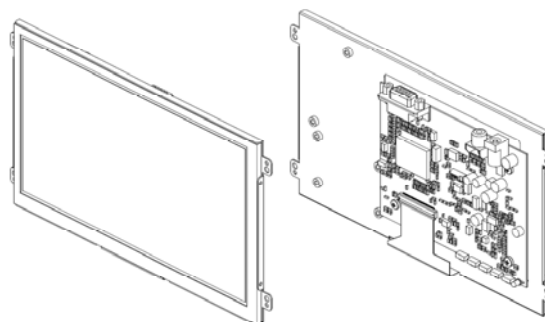

■ LP080N6IB~~x~~-F~~x~~R

1. General Descriptions

1.1 Features

- INNOLUX AT080TN64 Digital TFT LCD
- Ultra Compact
- NTSC/PAL/SECAM Video Auto Switch
- Single Operation Voltage +12V
- CVBS / Analog RGB (PC Mode) Signal Input
- All Functions can be controlled by UART
- Support Touch Screen Function (Option)

1.2 Applications

- Portable product
- Industrial
- Hand-held
- Security
- Instrument Display
- Office Electronics

1.3 Application Precautions

Do not use the products herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.

- Aerospace equipment
- Communication equipment for trunk lines.
- Control equipment for the nuclear power industry.
- Medical equipment related to life support, etc.

The other application that demands high reliability and functionality should first contact a sales representative.

FLAT DISPLAY TECHNOLOGY

■ LP080N6IB~~x~~-F~~x~~R V0.0



2. Contents


Contents	Page
1. General Description.....	1
1.1 Features	1
1.2 Applications	1
1.3 Application Precautions	1
2. Contents.....	2-3
3. Block Diagram.....	4
3.1 Block Diagram	4
4. TFT-LCD Information.....	5
4.1 TFT-LCD Mechanical Specifications	5
4.2 TFT-LCD Optical Characteristics	5
5. Order Information.....	6-7
5.1 Unit	6
5.2 Unit (4W Touch)	7
6. Dimension Information.....	8-10
6.1 Unit (LP080N6IB1-FBR)	8
6.2 Unit (LP080N6IB4-FBR)	9
6.3 Unit (LP080N6IB5-FBR)	10
7. Pin Description.....	11-14
7.1 J301 : INNOLUX LCD Panel I/O Terminals (FPC 50 Pin Pitch 0.5mm UP Contact Type)	11-12
7.2 J101B : Pin Assignment of Analog RGB Input (D-Sub 15Pin)	13
7.3 J104: Pin Assignment of UART (Pitch 1.25mm 4Pin, Top Entry Type)	13
7.4 DC JACK: Pin Assignment of Power Input (Inside Diameter:2.1 ψ Outside Diameter:5.5 ψ Side Entry Type)	13
7.5 RCA: Pin Assignment of Video Input (RCA JACK Yellow, Side Entry Type)	13
7.6 J401B : Pin Assignment of Touch USB (USBA-Female 2.0mm, Side Entry Type)(Option)	13
7.7 J401C : Pin Assignment of Touch RS232 (D-SUB 9 FEMALE)(Option)	14
8. Absolute Maximum Ratings.....	14
8.1 Absolute Maximum Ratings	14
9. Recommended Operating Conditions.....	15
9.1 Electrical Characteristics	15
9.2 VGA Mode Characteristics	15
9.3 Panel Backlight Data	15
10. 4W Resistance Touch Panel Characteristics.....	16-17
10.1 Pin assignment	16
10.2 Electrical Performance	16
10.3 Optical Performance	16
10.4 Mechanical Performance	16
10.5 Durability Performance	17

10.6 Environmental	17
10.7 Reliability Test Procedure	17
11. Operation Manual.....	18
11.1 Driver Board Manual	18
12. Packing List.....	19
13. Key Function by OSD.....	20-23
13.1 Menu Operation	20-22
13.2 Operations	23

Tentative

3. Block Diagram

3.1 Block Diagram

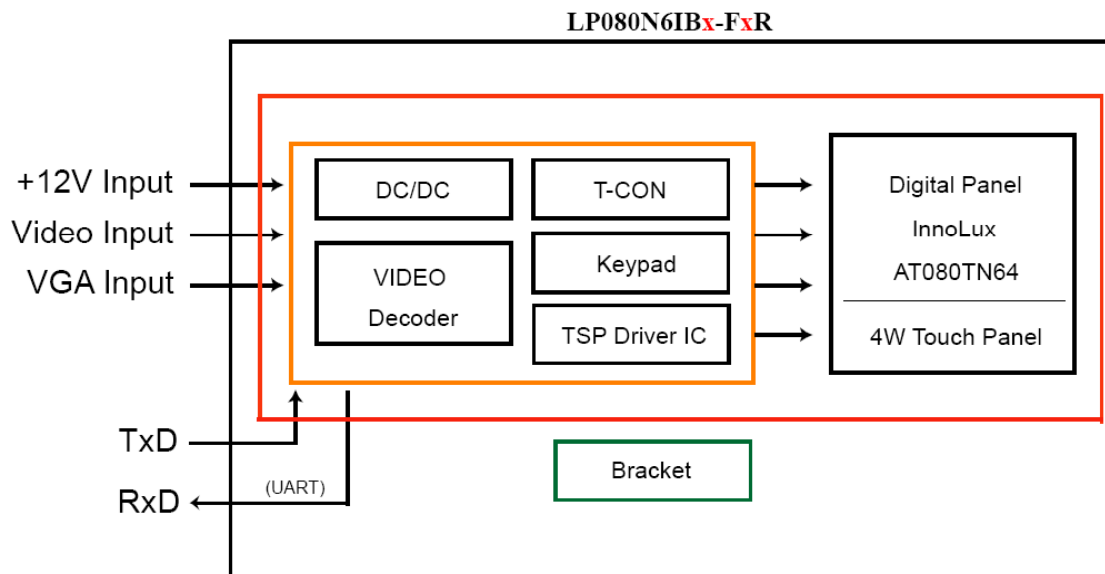

4. TFT-LCD Information

4.1 TFT-LCD Mechanical Specifications

Parameter	Specifications	Unit
Screen Size	8.0 (diagonal)	inch
Display Format	800 x (R.G.B) x 480	dot
Active Area	176.64(W) x 99.36(H)	mm
Pixel Pitch	0.2208(W) x 0.2070(H)	mm
Pixel Configuration	Stripe	
Outline Dimension	192.8(W) x 116.9(H) x 6.4(D)	mm
Surface Treatment	Anti – Glare	
Weight	-	g

4.2 TFT-LCD Optical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	Left	---	70	---	deg	
		Right	---	70	---	deg	
	Vertical	Top	---	70	---	deg	
		Bottom	---	50	---	deg	
Contrast Ratio	CR	$\theta = 0^\circ$	400	500	---	---	
Response time	Rise Fall	Tr	---	10		ms	
		Tf	---	15		ms	
Uniformity	U	$\theta = 0^\circ$	70	75	---	%	
Brightness	L	$\theta = 0^\circ$	360	450	---	Cd/m ²	
White Chromaticity	x	$\theta = 0^\circ$	0.26	0.31	0.36		
	y	$\theta = 0^\circ$	0.28	0.33	0.38		
LED Life Time		+25°	20000	---	---	Hrs	


FLAT DISPLAY TECHNOLOGY

■ LP080N6IBx-FxR V0.0




5. Order Information

5.1 Unit

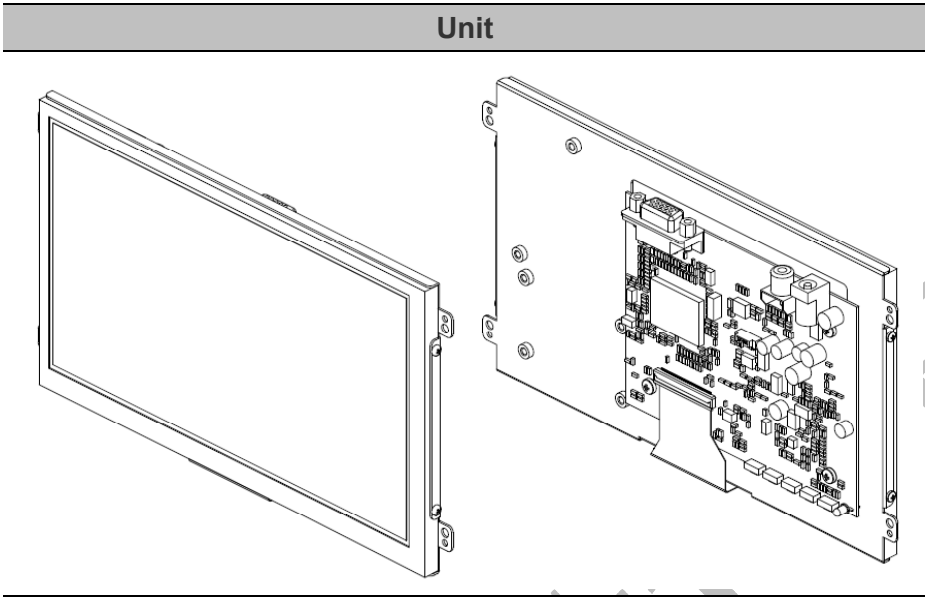

Parameter	LP080N6IB1-FBR	LP080N6IB1-FNR	Unit
CVBS	1	1	
VGA (D-Sub15 / 2.0mm 14Pin)	D-Sub15	D-Sub15	
AC to DC Adapter 12V/2.5A (LASTD12025-FDR)	⊙	-	
Power Cord Plug Type B for USA (LAAC818000-FDR)	⊙	-	
Video Cable (LAVDO18000-FDR)	⊙	-	
VGA Cable (LAVGA16000-FDR)	⊙	-	

5.2 Unit (4W Touch)

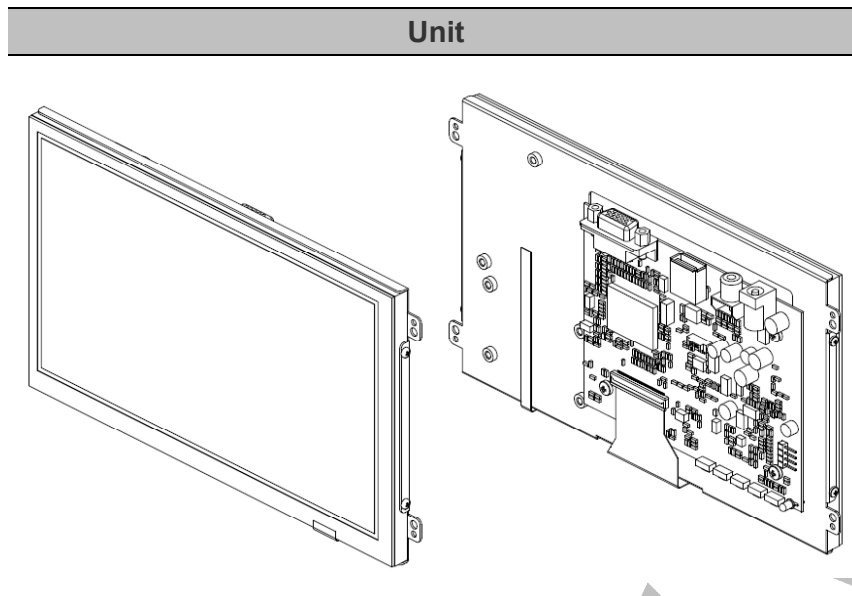

Parameter	LP080N6IB4-FBR	LP080N6IB5-FBR	LP080N6IB4-FNR	LP080N6IB5-FNR	Unit
CVBS	1	1	1	1	
VGA (D-Sub15 / 2.0mm 14Pin)	D-Sub15	D-Sub15	D-Sub15	D-Sub15	
Touch Panel Type	4W Resistive	4W Resistive	4W Resistive	4W Resistive	
Touch Screen Interface	USB	RS232	USB	RS232	
AC to DC Adapter 12V/2.5A (LASTD12025-FDR)	⊙	⊙	-	-	
Power Cord Plug Type B for USA (LAAC818000-FDR)	⊙	⊙	-	-	
Video Cable (LAVDO18000-FDR)	⊙	⊙	-	-	
VGA Cable (LAVGA16000-FDR)	⊙	⊙	-	-	
USB Cable (LAUSB18000-FDR)	⊙	-	-	-	
RS-232 Cable (LARS218000-FDR)	-	⊙	-	-	
Touch Screen Driver CD Disk	⊙	⊙	⊙	⊙	

FLAT DISPLAY TECHNOLOGY


■ LP080N6IB_x-F_xR V0.0



6.1 Unit (LP080N6IB1-FBR)



6.2 Unit (LP080N6IB4-FBR)

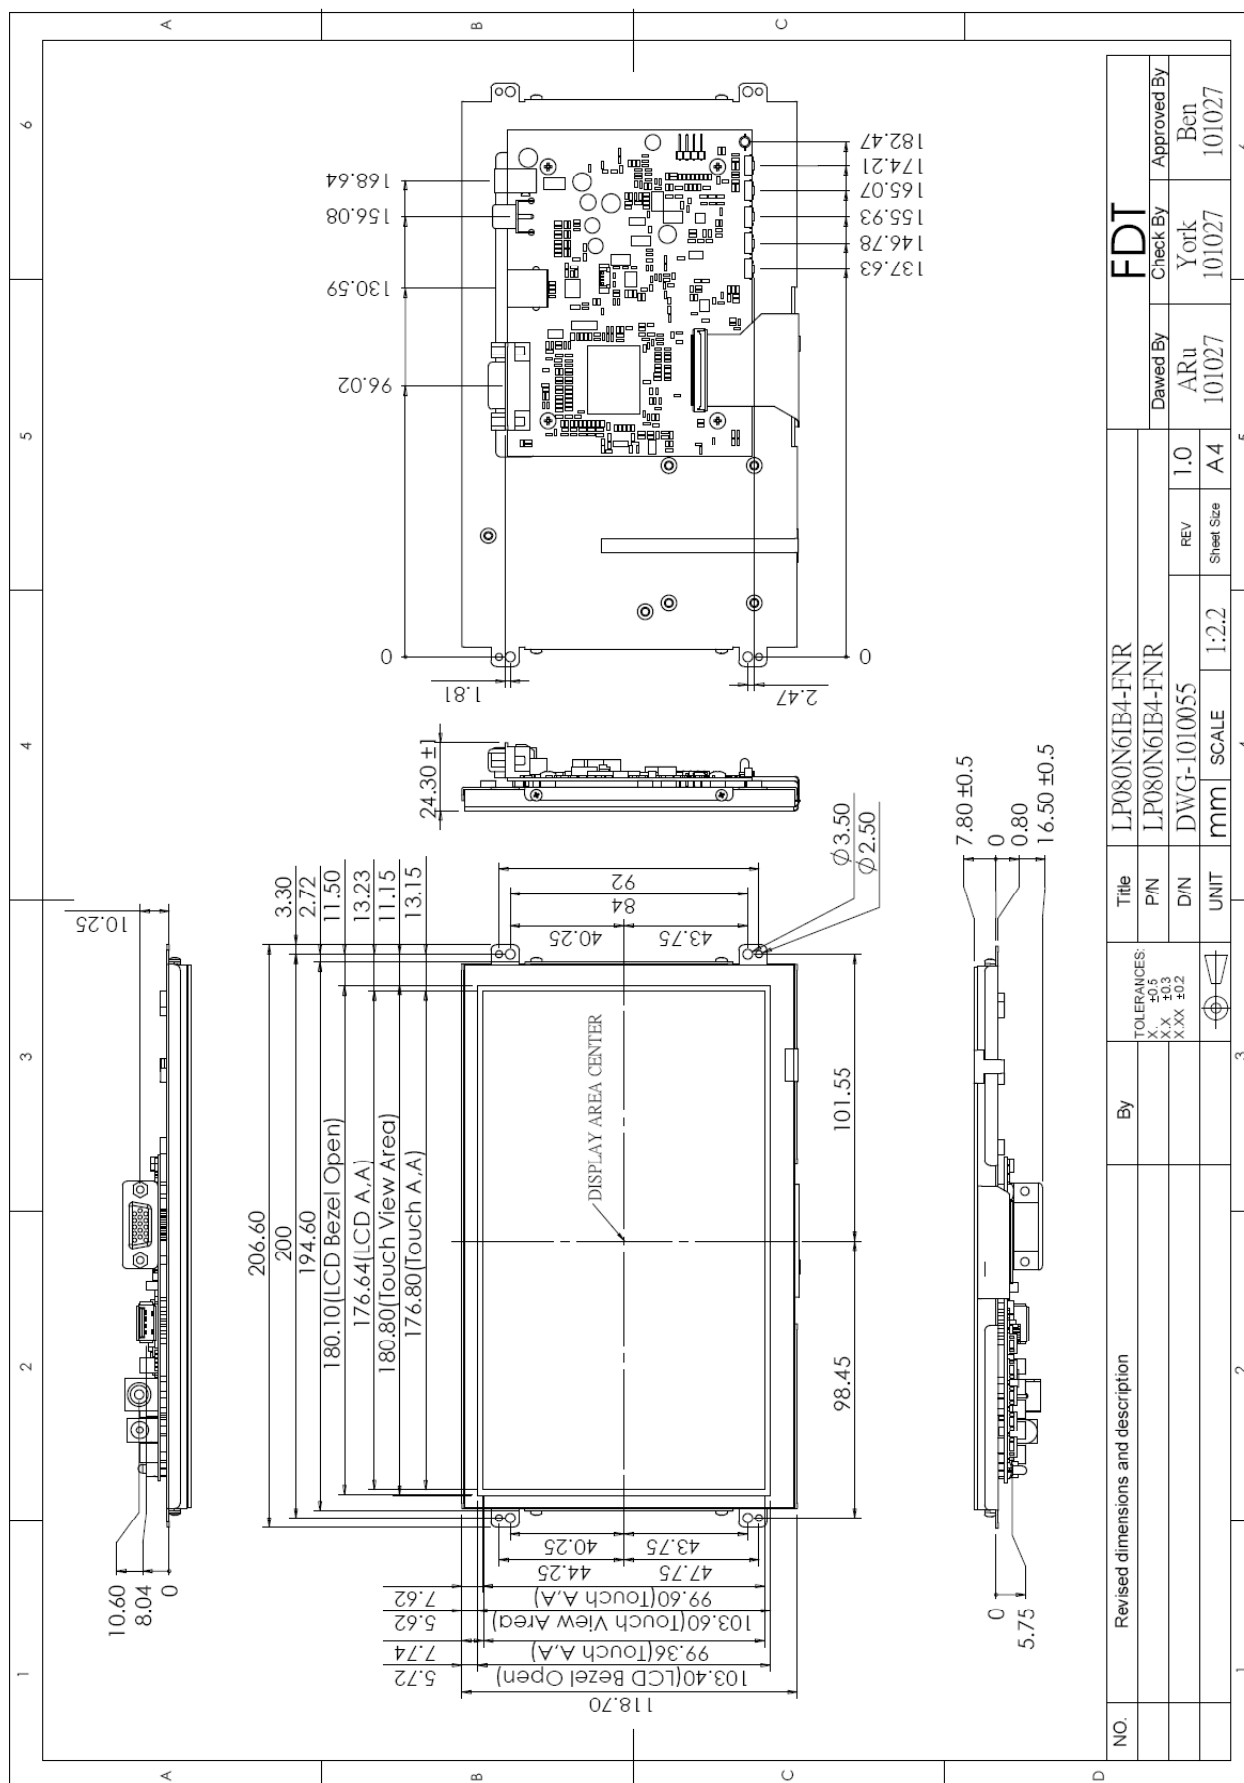


FLAT DISPLAY TECHNOLOGY

■ LP080N6IBx-FxR V0.0



6.3 Unit (LP080N6IB5-FBR)

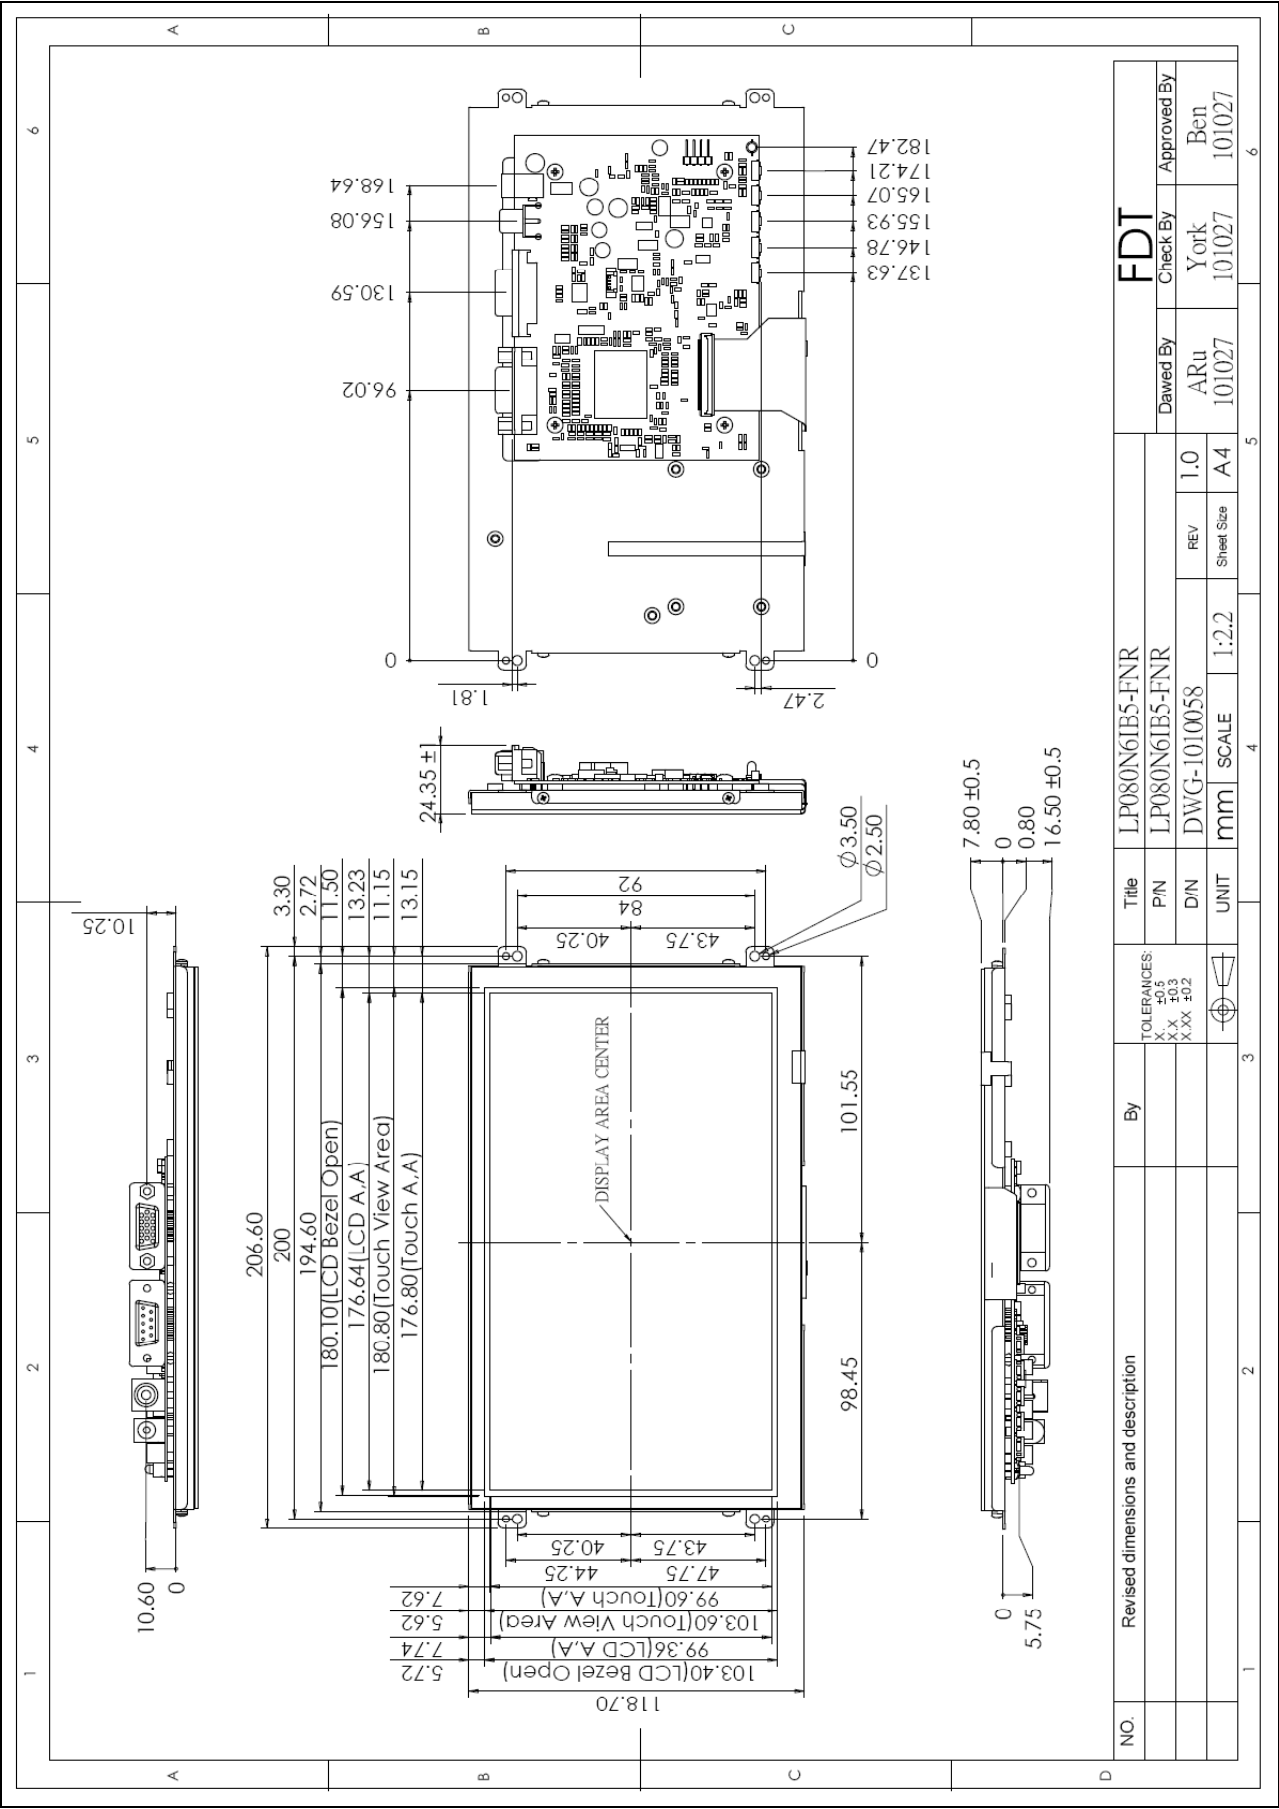

FLAT DISPLAY TECHNOLOGY

■ LP080N6IBx-FxR V0.0



7. Pin Description

7.1 J301 : INNOLUX LCD Panel I/O Terminals (FPC 50 Pin Pitch 0.5mm UP Contact Type)

Pin No	Symbol	I/O	Description	Remark
1	VLED+	P	Power for LED backlight (Anode)	
2	VLED+	P	Power for LED backlight (Anode)	
3	VLED-	P	Power for LED backlight (Cathode)	
4	VLED-	P	Power for LED backlight (Cathode)	
5	GND	P	Power ground	
6	VCOM	I	Common voltage	
7	VCC	P	Power for Digital circuit	
8	MODE	I	DE/SYNC mode select	
9	DE	I	Data Input Enable	
10	VS	I	Vertical Sync Input	
11	HS	I	Horizontal Sync Input	
12	B7	I	Blue data(MSB)	
13	B6	I	Blue data	
14	B5	I	Blue data	
15	B4	I	Blue data	
16	B3	I	Blue data	
17	B2	I	Blue data	
18	B1	I	Blue data	
19	B0	I	Blue data(LSB)	
20	G7	I	Green data (MSB)	
21	G6	I	Green data	
22	G5	I	Green data	
23	G4	I	Green data	
24	G3	I	Green data	
25	G2	I	Green data	
26	G1	I	Green data	
27	G0	I	Green data (LSB)	
28	R7	I	Red data (MSB)	
29	R6	I	Red data	
30	R5	I	Red data	
31	R4	I	Red data	
32	R3	I	Red data	
33	R2	I	Red data	
34	R1	I	Red data	
35	R0	I	Red data (LSB)	
36	GND	P	Power ground	
37	DCLK	I	Sample clock	

FLAT DISPLAY TECHNOLOGY


■ LP080N6IBx-FxR V0.0



38	GND	P	Power ground
39	L/R	I	Right/ left selection
40	U/D	I	Up/down selection
41	VGH	P	Gate ON voltage
42	VGL	P	Gate OFF voltage
43	AVDD	P	Power for Analog circuit
44	RESET	I	Global reset pin.
45	NC		No connection
46	VCOM	I	Common voltage
47	DITHB	I	Dithering function
48	GND	P	Power ground
49	NC		No connection
50	NC		No connection

7.2 J101B : Pin Assignment of Analog RGB Input (D-Sub 15Pin)

Pin No	Symbol	I/O	Description	Remark
1	RI+	I	Analog Red Signal	
2	GI+	I	Analog Green Signal	
3	BI+	I	Analog Blue Signal	
4	NC	-	No Connection	
5	GND	-	Ground	
6	AGND	-	Analog Ground	
7	AGND	-	Analog Ground	
8	AGND	-	Analog Ground	
9	VGA5V	-	VGA +5V Input	
10	VGA-Det	I	VGA Detect	
11	NC	-	No Connection	
12	NC	-	No Connection	
13	HS_IN	I	TTL Horizontal sync	
14	VS_IN	I	TTL Vertical sync	
15	N.C	-	No Connection	

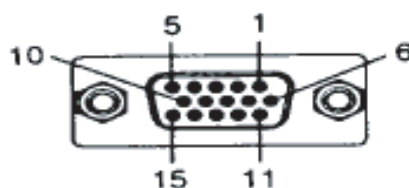


7.3 J104: Pin Assignment of UART (Pitch 1.25mm 4Pin, Top Entry Type)

※ Connector Part No.: 53398-0471 (MOLEX) or MS24014 (STM); Matching Connector Part No.: 51021-0400 (MOLEX) or P24014 (STM)

Pin No	Symbol	I/O	Description	Remark
1	TX	O	UART Transmission Data	
2	RX	I	UART Receive Data	
3	GND	-	Ground	
4	+5VA	O	+5V Output Voltage	

Note: All Functions can be controlled by UART , About UART command list please contact FDT sales.

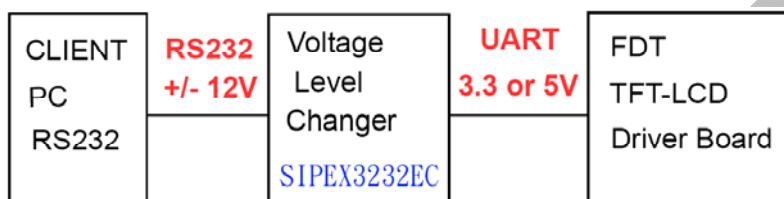

7.4 DC JACK: Pin Assignment of Power Input (Inside Diameter:2.1 ϕ Outside Diameter:5.5 ϕ Side Entry Type)

Pin No	Symbol	I/O	Description	Remark
1	VIN	I	+12V Input Voltage	
2	GND	-	Power Ground	

7.5 RCA: Pin Assignment of Video Input (RCA JACK Yellow, Side Entry Type)

Pin No	Symbol	I/O	Description	Remark
1	Video	I	Video Input	
2	AGND	-	Analog Ground	

7.6 J401B : Pin Assignment of Touch USB (USBA-Female 2.0mm, Side Entry Type)(Option)

Pin No	Symbol	I/O	Description	Remark
1	DGND	-	Digital Ground	
2	D+	-	DATA (+)	
3	D-	-	DATA (-)	
4	VBUS	-	USB VCC	

FLAT DISPLAY TECHNOLOGY

■ LP080N6IBx-FxR V0.0



7.7 J401C : Pin Assignment of Touch RS232 (D-SUB 9 FEMALE)(Option)

Pin No	Symbol	I/O	Description	Remark
1	NC	-	No Connection	
2	TXD	-	Transmit Data	
3	RXD	-	Receive Data	
4	NC	-	No Connection	
5	GND	-	Ground	
6	NC	-	No Connection	
7	NC	-	No Connection	
8	NC	-	No Connection	
9	NC	-	No Connection	

8. Absolute Maximum Ratings

8.1 Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Remark
Input Voltage	V _{in}	9	15	V	
Video Input Signal	Video in	0.5	2.0	V _{p-p}	@75Ω
Analog RGB Input Signal	Analog RGB in	0.5	2.0	V _{p-p}	@75Ω
Digital Input Signal	TTL	+0.3	+3.6	V	
Operating Temperature		-20	+70	°C	
Storage Temperature		-30	+80	°C	
Operating Temperature With TSP		-20	+70	°C	
Storage Temperature With TSP		-30	+80	°C	

FLAT DISPLAY TECHNOLOGY

■ LP080N6IBx-FxR V0.0



9. Recommended Operating Conditions

9.1 Electrical Characteristics

Parameter	Symbol	I/O	Min	Typ	Max	Unit	Note
Input Voltage	Vin	I	+10	+12	+14	V	
Total Current	Iin	I		-		mA	
Power Consumption		I		-		W	@+12V
Output Voltage	VDD	O	+3.2	+3.3	+3.4	V	I=10mA
Video Input Signal	Video in	I		1.0		Vp-p	@75Ω
Analog RGB Input Signal	Analog RGB in	RGB		0.7		Vp-p	@75Ω

9.2 VGA Mode Characteristics

Dots per inch	H	Unit	Polarity	V	Unit	Polarity	Note
640*480	31.469	KHz	Negative	59.941	Hz	Negative	
800*600	37.879	KHz	Positive	60.317	Hz	Positive	
1024*768	48.363	KHz	Negative	60.004	Hz	Negative	

9.3 Panel Backlight Data

Parameter	Symbol	Min	Typ	Max	Unit	Note
LED Backlight Voltage	VLED	8.4	9.9	10.2	Vrms	
LED Backlight Current	ILED	216	240	264	mA	

10. 4W Resistance Touch Panel Characteristics

10.1 Pin assignment

Pin No	Symbol	Description	Remark
1	Y1	Upper Electrode Y (Upper Side)	
2	X1	Lower Electrode X (Right Side)	
3	Y2	Upper Electrode Y (Down Side)	
4	X2	Lower Electrode X (Left Side)	

10.2 Electrical Performance

Parameter	Symbol	Min	Typ	Max	Unit	Remark
Terminal Resistance	X	350		1300	Ω	
	Y	120		450	Ω	
Linearity		-	-	1.5	%	
Insulation Impedance		10	-	-	M Ω	DC 25V
Response Time		-	-	10	ms	

10.3 Optical Performance

Parameter	Specifications
Light Transmittance	$\geq 80\%$
Haze	$\leq 10\%$

10.4 Mechanical Performance

Parameter	Specifications
Input Method	Finger or stylus pen
Operating Force	$\leq 50g$
Surface Hardness	3H or more

10.5 Durability Performance

Parameter	Specifications
Writing Durability	Operation tested to greater than 10 thousand writing (R0.8mm 、 exerting pressure 250g) , without failure
Finger Touch Durability	Operation tested to greater than 1 million touches (R8mm 、 hardness 60° 、 exerting pressure 250g) in one location without failure, with a stylus similar to a finger

10.6 Environmental

Parameter	Specifications
Operating Temp.	-25℃~75℃ (Except dew condensation)
Operation Humidity	20% RH ~ 90% relative humidity, non-condensing
Storage Temp.	-30℃~80℃ (Except dew condensation)
Storage Humidity	10% RH ~ 90% relative humidity, non-condensing

Note: 1. The environment is under normal atmosphere pressure.


2. Testing in an atmosphere maintained at 23 +/- 2℃ and 50 +/- 5% relative humidity.

10.7 Reliability Test Procedure

Parameter	Specifications
High temperature storage test	70℃ for 240 hours.
Low temperature storage test	-40℃ for 240 hours.
Thermal Cycling	-40℃ (30 min)~85℃ (60 min) for 10 cycles.
High temperature and high humidity	35℃ , 90%RH for 240 hours.

11.Operation Manual

11.1 Driver Board Manual

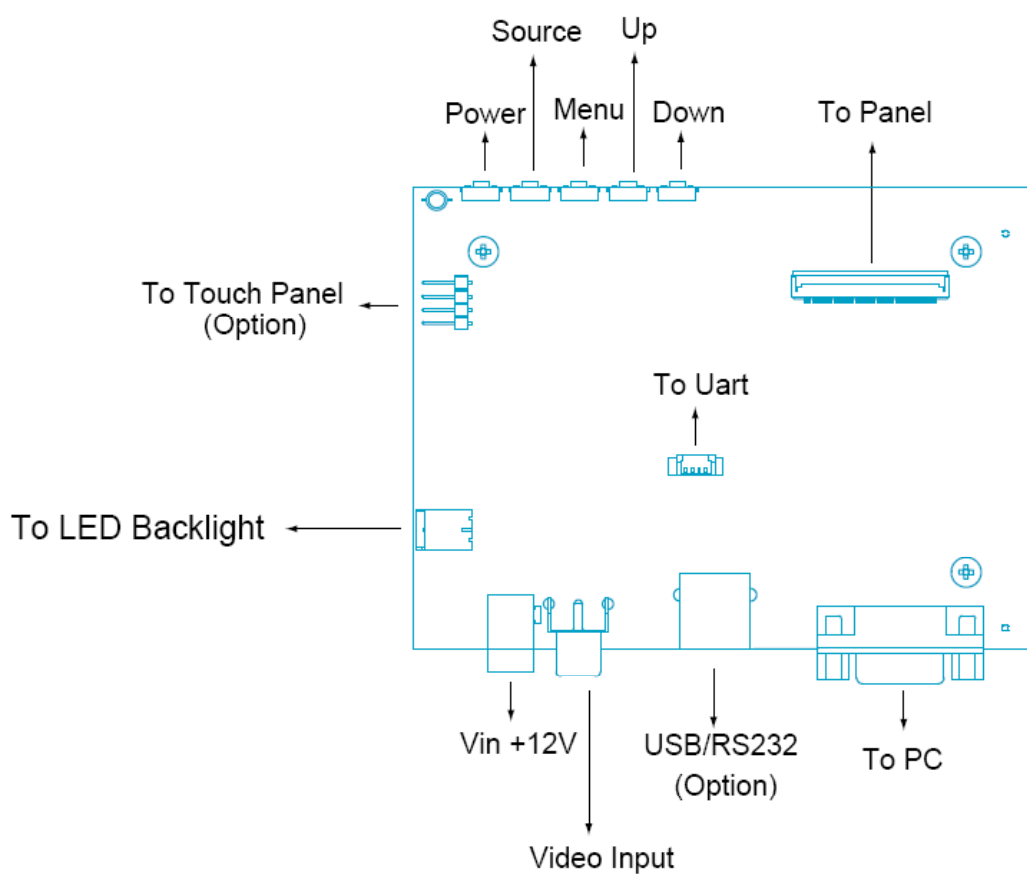

FLAT DISPLAY TECHNOLOGY

■ LP080N6IBx-FxR V0.0



12. Packing List

Before you begin installing the KIT, please make sure that the following materials have been shipped:



A. LASTD12025-FDR



B. LAAC818000-FDR



C. LAVDO18000-FDR



D. LAVGA16000-FDR



E. LAUSB18000-FDR



F. LARS218000-FDR



G.

- A. AC to DC Adapter (100-240VAC 50-60Hz to +12VDC @ 2.5A)
- B. Power Cord (Plug Type B for USA)
- C. Video Cable
- D. VGA Cable
- E. USB Cable
- F. RS-232 Cable
- G. Touch Screen Driver CD Disk / User Manual

If any of these items are missing or damaged, contact your distributor or sales representative immediately.

FLAT DISPLAY TECHNOLOGY

■ LP080N6IBx-FxR V0.0



13. Key Function by OSD

13.1 Menu Operation


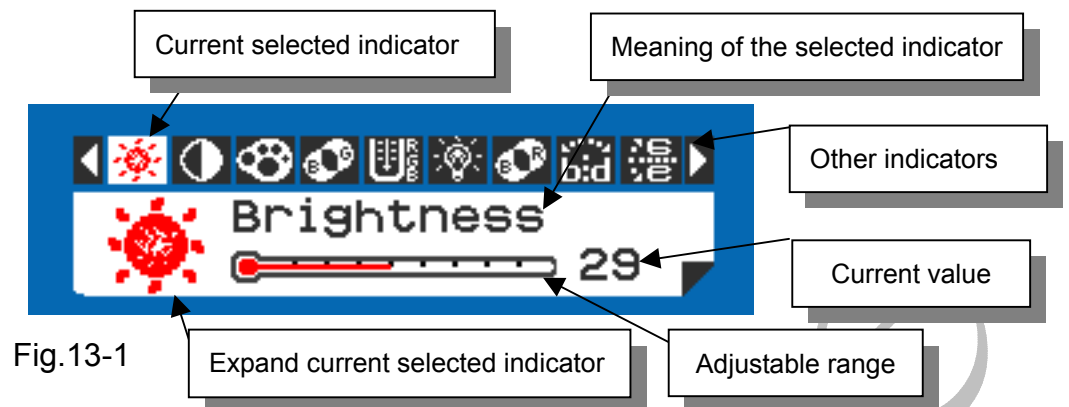


Fig.13-1

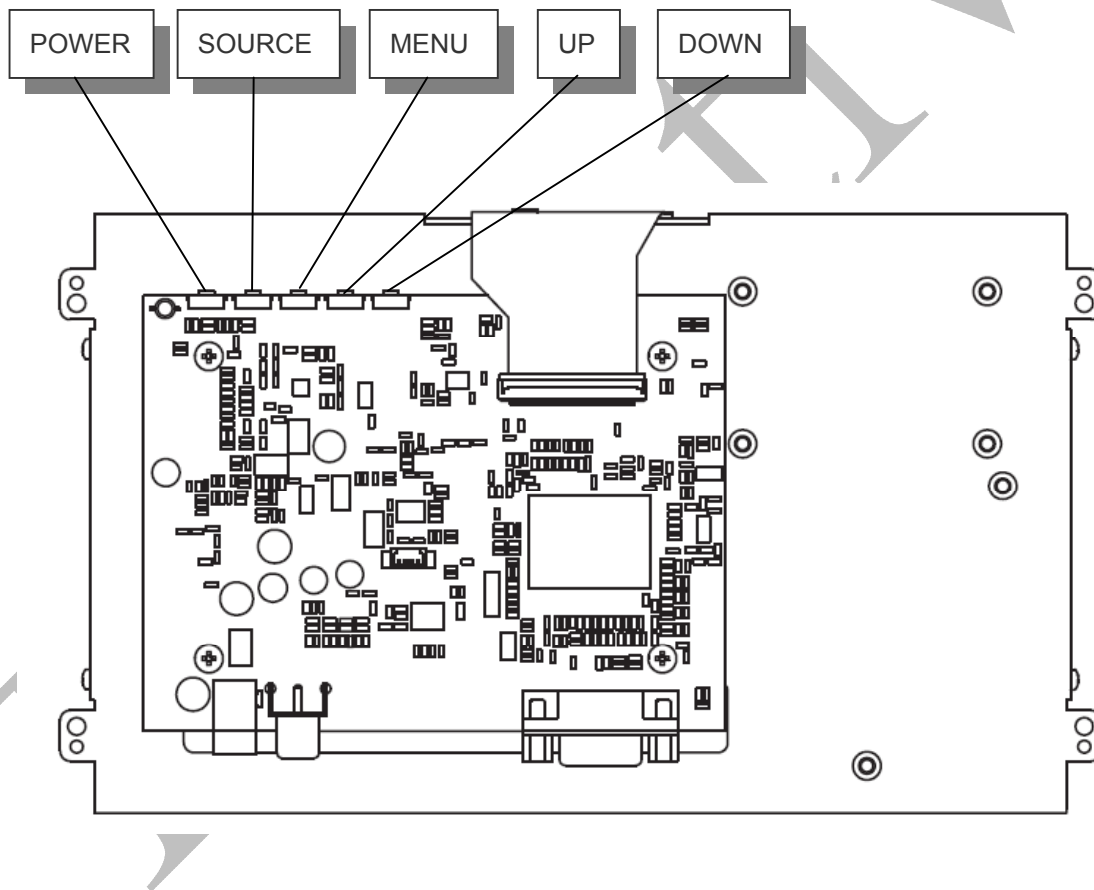

Operations of key board :

1. To navigate the menu, press [MENU]. (Fig.13-1)
2. The indicator lighting up in white color is the selected adjustment item.
3. To Next Item of the menu, press [MENU] again.
4. The operations below are only available when "Menu" is started.
5. Press [UP] / [DOWN] to adjust the value of the selected item.

FLAT DISPLAY TECHNOLOGY

■ LP080N6IBx-FxR V0.0




Overview of the menu :

Firmware Version must be $\geq$ VER 0.26

Indicator	Meaning	Adjustable range	For	Remark
	Brightness	0 ~ 64	AV / VGA	Adjust-Bar
	Contrast	0 ~ 64	AV / VGA	Adjust-Bar
	Color	0 ~ 64	AV	Adjust-Bar
	Tint	0 ~ 32	AV	Adjust-Bar
	Sharpness	0 ~ 16	AV	Adjust-Bar
	Dimmer	0 ~ 9	AV / VGA	
	Color Tone	Normal / Warm / Cool	AV / VGA	
	Mirror	OFF / ON	AV / VGA	
	Flip	OFF / ON	AV / VGA	
	H-Position	-25 ~ +25	AV / VGA	Balance-Bar
	V-Position	-10 ~ +10	AV / VGA	Balance-Bar
	Auto		VGA	
	Scan	Over Scan / Under Scan	AV	
	Information		AV / VGA	Fig.13-2
	Setup		AV / VGA	Fig.13-3
	Factory Set		AV / VGA	
	Exit		AV / VGA	

Fig.13-2

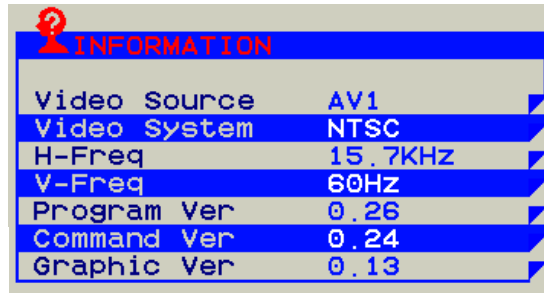

Setup Menu :



Fig.13-3

Indicator	Meaning	Adjustable range	Function	Remark
	Show Status	ON / OFF	Show signal status.	ON: Show OFF: Hidden
	Blue Screen	ON / OFF	If loss signal will put on the blue or black screen.	ON: Blue OFF: Black
	Auto Power On	ON / OFF	Power input module will be auto turn on.	ON: Auto OFF: Manual
	Auto Saving	OFF / 3s / 5s / 15s / 30s	If signal lost over setting times will be power off.	ON: Auto OFF: Normal
	Detect Source	ON / OFF	Auto detection which source is existence and change.	ON: Auto OFF: Normal
	Return			

Note : VGA only type don't have Detect Source function.

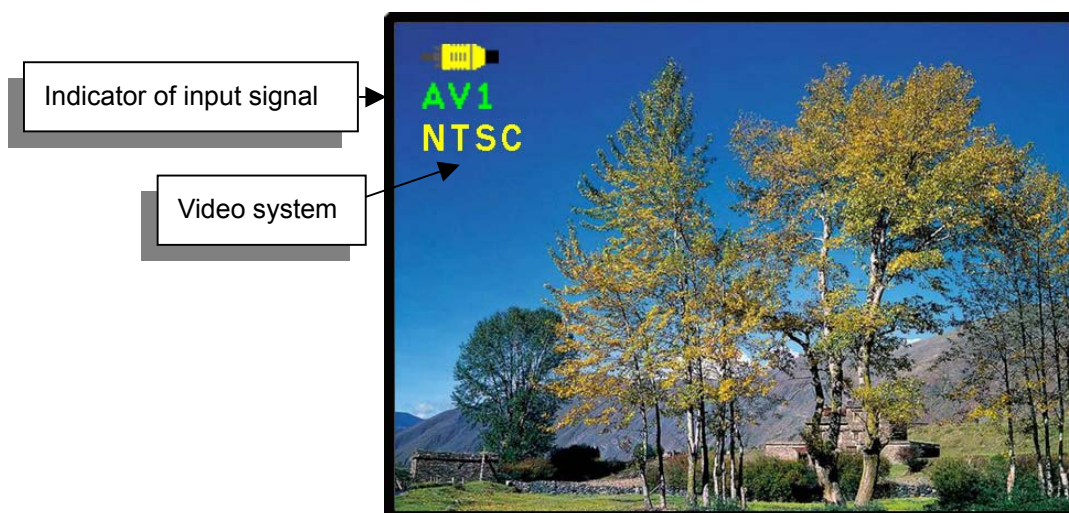


Fig.13-4

[Power] : Monitor power on / off

[Source] : Input signal switch

Overview of input signals :

Indicator	Input signal	Interface	Video system
	AV1	Composite	NTSC / PAL / SECAM
	VGA	Analog RGB	640x480_60 / 800x600_60 / 1024x768_60