

Product Specification

SPECIFICATION FOR APPROVAL

(●) Preliminary Specification

() Final Specification

Title	14.1" WXGA TFT LCD
-------	--------------------

Customer	
MODEL	

SUPPLIER	LG.Philips LCD Co., Ltd.
*MODEL	LP141WX1
Suffix	TLE6

*When you obtain standard approval,
please use the above model name without suffix

SIGNATURE	DATE
/	_____
/	_____
/	_____

Please return 1 copy for your confirmation with
your signature and comments.

SIGNATURE	DATE
S.C. Yun / G.Manager	_____
REVIEWED BY	_____
S.R. Kim / Manager	_____
PREPARED BY	_____
D.G. Choi / Engineer	_____
Products Engineering Dept. LG. Philips LCD Co., Ltd	

Product Specification

Contents

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	6
3-1	ELECTRICAL CHARACTERISTICS	6
3-2	INTERFACE CONNECTIONS	8
3-3	SIGNAL TIMING SPECIFICATIONS	9
3-4	SIGNAL TIMING WAVEFORMS	9
3-5	COLOR INPUT DATA REFERENCE	10
3-6	POWER SEQUENCE	11
4	OPTICAL SPECIFICATIONS	12
5	MECHANICAL CHARACTERISTICS	16
6	RELIABILITY	20
7	INTERNATIONAL STANDARDS	21
7-1	SAFETY	21
7-2	EMC	21
8	PACKING	22
8-1	DESIGNATION OF LOT MARK	22
8-2	PACKING FORM	22
9	PRECAUTIONS	23
A	APPENDIX. Enhanced Extended Display Identification Data (EEDID™)	25
		27



LP141WX1
Liquid Crystal Display

Product Specification

RECORD OF REVISIONS

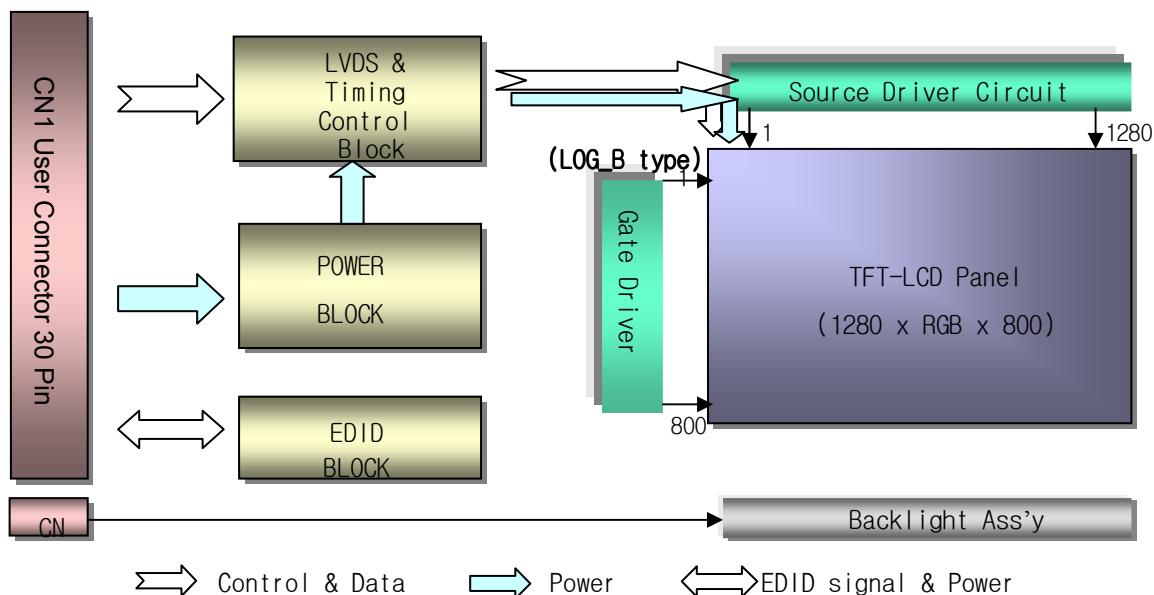
Product Specification

1. General Description

The LP141WX1 is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp (CCFL) backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 14.1 inches diagonally measured active display area with WXGA resolution(800 vertical by 1280 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP141WX1 has been designed to apply the interface method that enables low power, high speed, low EMI.

The LP141WX1 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP141WX1 characteristics provide an excellent flat display for office automation products such as Notebook PC.



General Features

Active Screen Size	14.1 inches diagonal
Outline Dimension	320.0 (H) × 206.0(V) × 5.5(D) [mm] (Max.)
Pixel Pitch	0.2373 mm × 0.2373 mm
Pixel Format	1280 horiz. By 800 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	200 cd/m ² (Min.5 point)
Power Consumption	Total 5.42 Watt(Typ.) @ LCM circuit 1.32 Watt(Typ.), B/L input 4.1 Watt(Typ.)
Weight	425 g (Max.), 415g(Typ.) W/O Inverter & Down Bracket
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Glare treatment of the front polarizer
RoHS Comply	Yes

Product Specification


2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at $25 \pm 5^\circ\text{C}$
Operating Temperature	T _{OP}	0	50	°C	1
Storage Temperature	H _{ST}	-20	60	°C	1
Operating Ambient Humidity	H _{OP}	10	90	%RH	1
Storage Humidity	H _{ST}	10	90	%RH	1

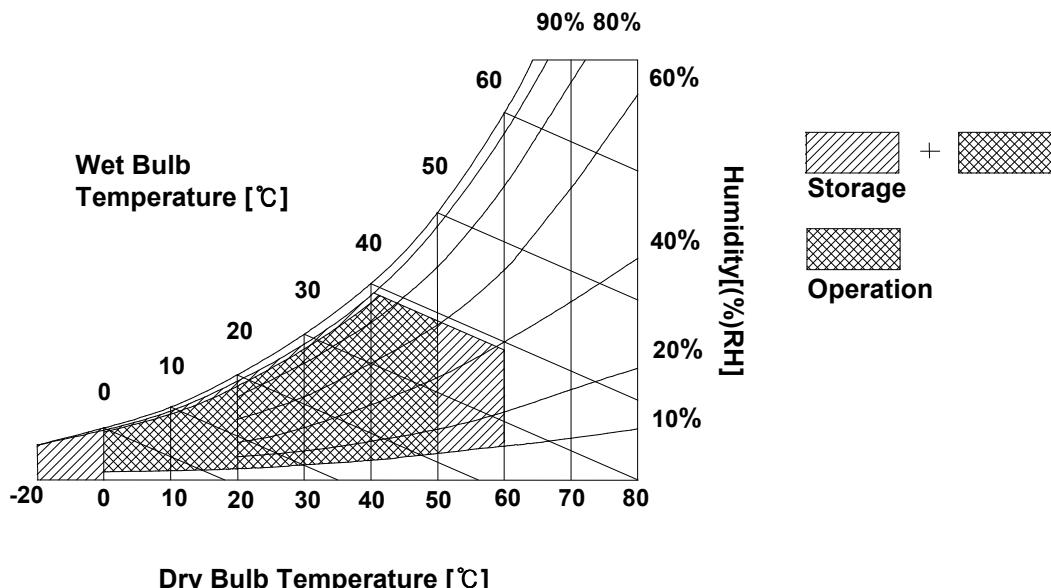Note : 1. Temperature and relative humidity range are shown in the figure below.
 Wet bulb temperature should be 39°C Max, and no condensation of water.



Product Specification

3. Electrical Specifications

3-1. Electrical Characteristics

The LP141WX1 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the CCFL, is typically generated by an inverter. The inverter is an external unit to the LCD.

Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
MODULE :						
Power Supply Input Voltage	V _C C	3.0	3.3	3.6	V _{DC}	
Power Supply Input Current	I _{CC}	-	400	460	mA	1
Power Consumption	P _C	-	1.32	1.52	Watt	1
Differential Impedance	Z _m	90	100	110	Ohm	2
LAMP :						
Operating Voltage	V _{BL}	640	655	880	V _{RMS}	3
Operating Current	I _{BL}	2.0	6.3	7.0	mA _{RMS}	4
Power Consumption	P _{BL}	-	4.1	4.5	W	9
Operating Frequency	f _{BL}	50	65	80	kHz	7
Discharge Stabilization Time	T _s	-	-	180	Sec	5
Life Time		15,000	-	-	Hrs	6
Established Starting Voltage at 25°C at 0 °C	V _S			1180 1415	V _{RMS} V _{RMS}	8

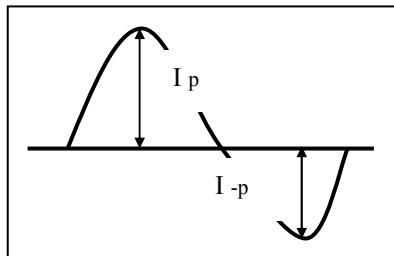
Note)

1. The specified current and power consumption are under the V_{CC} = 3.3V , 25 °C, fv = 60Hz condition whereas full black pattern is displayed and fv is the frame frequency.
2. This impedance value is needed to proper display and measured form LVDS Tx to the mating connector.
3. The variance of the voltage is ± 5%.
4. The typical operating current is for the typical surface luminance (L_{WH}) in optical characteristics.
5. Define the brightness of the lamp after being lighted for 5 minutes as 100%, T_s is the time required for the brightness of the center of the lamp to be not less than 95%.
6. The life time is determined as the time at which brightness of lamp is 50% compare to that of initial value at the typical lamp current.
7. The output of the inverter must have symmetrical(negative and positive) voltage waveform and symmetrical current waveform.(Asymmetrical ratio is less than 10%) Please do not use the inverter which has asymmetrical voltage and asymmetrical current and spike wave.
Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.
8. The voltage above VS should be applied to the lamps for more than 1 second for start-up. Otherwise, the lamps may not be turned on. The used lamp current is the lamp typical current.
9. The lamp power consumption shown above does not include loss of external inverter.
The applied lamp current is a typical one.

Product Specification

Note)

9. Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp, are following.
 It shall help increase the lamp lifetime and reduce leakage current.
- The asymmetry rate of the inverter waveform should be less than 10%.
 - The distortion rate of the waveform should be within $\sqrt{2} \pm 10\%$.
 * Inverter output waveform had better be more similar to ideal sine wave.



* Asymmetry rate:

$$|I_p - I_{-p}| / I_{rms} * 100\%$$

* Distortion rate

$$I_p (\text{or } I_{-p}) / I_{rms}$$

※ Do not attach a conducting tape to lamp connecting wire.

If the lamp wire attach to a conducting tape, TFT-LCD Module has a low luminance and the inverter has abnormal action. Because leakage current is occurred between lamp wire and conducting tape.

Product Specification


3-2. Interface Connections

This LCD employs two interface connections, a 30 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.

The electronics interface connector is a model FI-XB30SRL-HF11 manufactured by JAE.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	GND	Ground	
2	VCC	Power Supply, 3.3V Typ.	1, Interface chips 1.1 LCD : THINNE, KE5M6U2654 (LCD Controller) including LVDS Receiver
3	VCC	Power Supply, 3.3V Typ.	1.2 System : it must include international standard LVDS Transmitter. * Pin to Pin compatible with LVDS
4	V EEDID	DDC 3.3V power	
5	NC	Reserved for supplier test point	
6	CIk EEDID	DDC Clock	
7	DATA EEDID	DDC Data	
8	R _{IN} 0-	Negative LVDS differential data input	2. Connector
9	R _{IN} 0+	Positive LVDS differential data input	2.1 LCD : FI-XB30SRL-HF11, JAE or its compatibles
10	GND	Ground	2.2 Mating : FI-X30M or equivalent.
11	R _{IN} 1-	Negative LVDS differential data input	2.3 Connector pin arrangement
12	R _{IN} 1+	Positive LVDS differential data input	
13	GND	Ground	
14	R _{IN} 2-	Negative LVDS differential data input	
15	R _{IN} 2+	Positive LVDS differential data input	
16	GND	Ground	
17	CLKIN-	Negative LVDS differential clock input	
18	CLKIN+	Positive LVDS differential clock input	
19	GND	Ground	
20	NC	No Connect	
21	NC	No Connect	
22	NC	No Connect	
23	NC	No Connect	
24	NC	No Connect	
25	NC	No Connect	
26	NC	No Connect	
27	NC	No Connect	
28	NC	No Connect	
29	NC	No Connect	
30	NC	No Connect	



[LCD Module Rear View]

The backlight interface connector is a model BHSR-02VS-1, manufactured by JST or Compatible. The mating connector part number is SM02B-BHSS-1 or equivalent.

Table 5. BACKLIGHT CONNECTOR PIN CONFIGURATION (J3)

Pin	Symbol	Description	Notes
1	HV	Power supply for lamp (High voltage side)	1
2	LV	Power supply for lamp (Low voltage side)	1

Notes : 1. The high voltage side terminal is colored Pink and the low voltage side terminal is Blue.

Product Specification

3-3. Signal Timing Specifications

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.


Table 6. TIMING TABLE

ITEM	Symbol	Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	64.0	72.3	75.7	MHz
Hsync	Period	T_{HP}	1320	1464	1500	tCLK
	Width	t_{WH}	10	32	40	
	Width-Active	t_{WHA}	1280	1280	1280	
Vsync	Period	t_{VP}	808	823	841	tHP
	Width	t_{WV}	2	6	8	
	Width-Active	t_{WVA}	800	800	800	
Data Enable	Horizontal back porch	t_{HBP}	20	104	118	tCLK
	Horizontal front porch	t_{HFP}	10	48	62	
	Vertical back porch	t_{VBP}	5	14	28	tHP
	Vertical front porch	t_{VFP}	1	3	5	

3-4. Signal Timing Waveforms

Condition : VCC = 3.3V

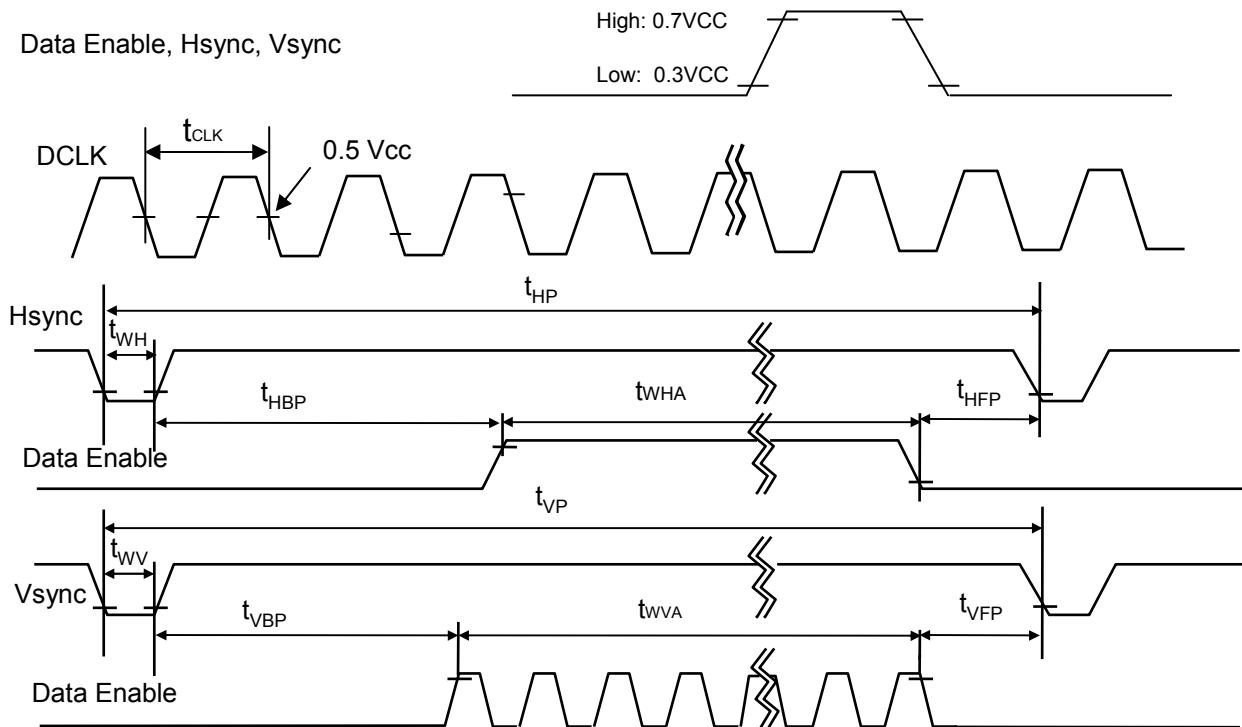Data Enable, Hsync, Vsync




Product Specification

3-5. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

Color		Input Color Data																					
		RED						GREEN						BLUE									
		MSB	R5	R4	R3	R2	R1	R0	MSB	G5	G4	G3	G2	G1	G0	MSB	B5	B4	B3	B2	B1	B0	
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	Cyan	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
	Magenta	1	1	1	1	1	1	1	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	
	RED (62)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	
	
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
BLUE	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	
	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	
BLUE	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1

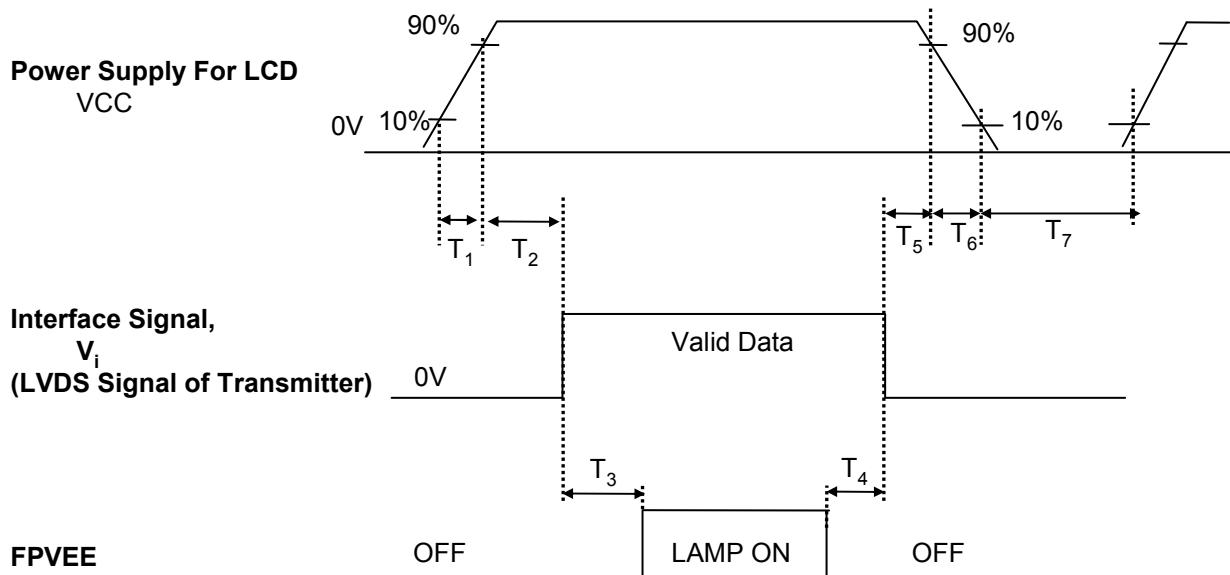Product Specification
3-6. Power Sequence

Table 8. POWER SEQUENCE TABLE

Parameter	Value			Units
	Min.	Typ.	Max.	
T ₁	-	-	10	(ms)
T ₂	0	-	50	(ms)
T ₃	200	-	-	(ms)
T ₄	200	-	-	(ms)
T ₅	0	-	50	(ms)
T ₆	-	-	10	(ms)
T ₇	400	-	-	(ms)

Note)

1. Please avoid floating state of interface signal at invalid period.
2. When the interface signal is invalid, be sure to pull down the power supply for LCD VCC to 0V.
3. Lamp power must be turn on after power supply for LCD and interface signal are valid.

Product Specification

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

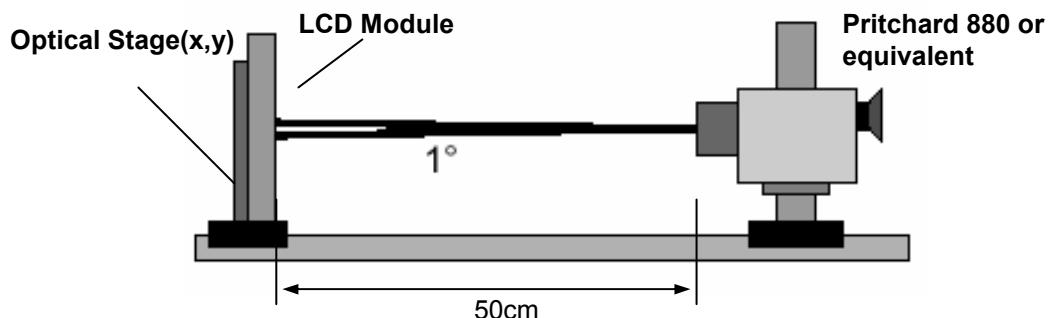


Table 9. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fv=60Hz, f_{CLK}= 71.4MHz, I_{BL}= 6.3mA

Parameter	Symbol	Values			Units	Notes
		Min	Typ	Max		
Contrast Ratio	CR	300	-	-		1
Surface Luminance, white	L _{WH}	200	-	-	cd/m ²	2
Luminance Variation	δ _{WHITE}	-	1.85	2.0		3
Response Time						4
Rise Time	Tr _R	-	5.5	9	ms	
Delay Time	Tr _D	-	10.5	16	ms	
Color Coordinates						
RED	RX	0.552	0.582	0.612		
	RY	0.314	0.344	0.374		
GREEN	GX	0.296	0.326	0.356		
	GY	0.517	0.547	0.577		
BLUE	BX	0.128	0.158	0.188		
	BY	0.107	0.137	0.167		
WHITE	WX	0.283	0.313	0.343		
	WY	0.299	0.329	0.359		
Viewing Angle						5
x axis, right($\Phi=0^\circ$)	Θr	40	-	-	degree	
x axis, left ($\Phi=180^\circ$)	Θl	40	-	-	degree	
y axis, up ($\Phi=90^\circ$)	Θu	15	-	-	degree	
y axis, down ($\Phi=270^\circ$)	Θd	35	-	-	degree	
Gray Scale						6

Product Specification

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{WH} = \text{Average}(L_1, L_2, \dots, L_5)$$

3. The variation in surface luminance , The panel total variation (δ_{WHITE}) is determined by measuring L_N at each test position 1 through 13 and then defined as followed numerical formula.

For more information see FIG 2.

$$\delta_{WHITE} = \frac{\text{Maximum}(L_1, L_2, \dots, L_{13})}{\text{Minimum}(L_1, L_2, \dots, L_{13})}$$

4. Response time is the time required for the display to transition from white to black (rise time, Tr_R) and from black to white(Decay Time, Tr_D). For additional information see FIG 3.

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.


6. Gray scale specification

* $f_V = 60\text{Hz}$


Gray Level	Luminance [%] (Typ)
L0	0.26
L7	1.74
L15	5.66
L23	12.0
L31	20.4
L39	35.5
L47	56.5
L55	80.6
L63	100

Product Specification
FIG. 2 Luminance

<measuring point for surface luminance & measuring point for luminance variation>

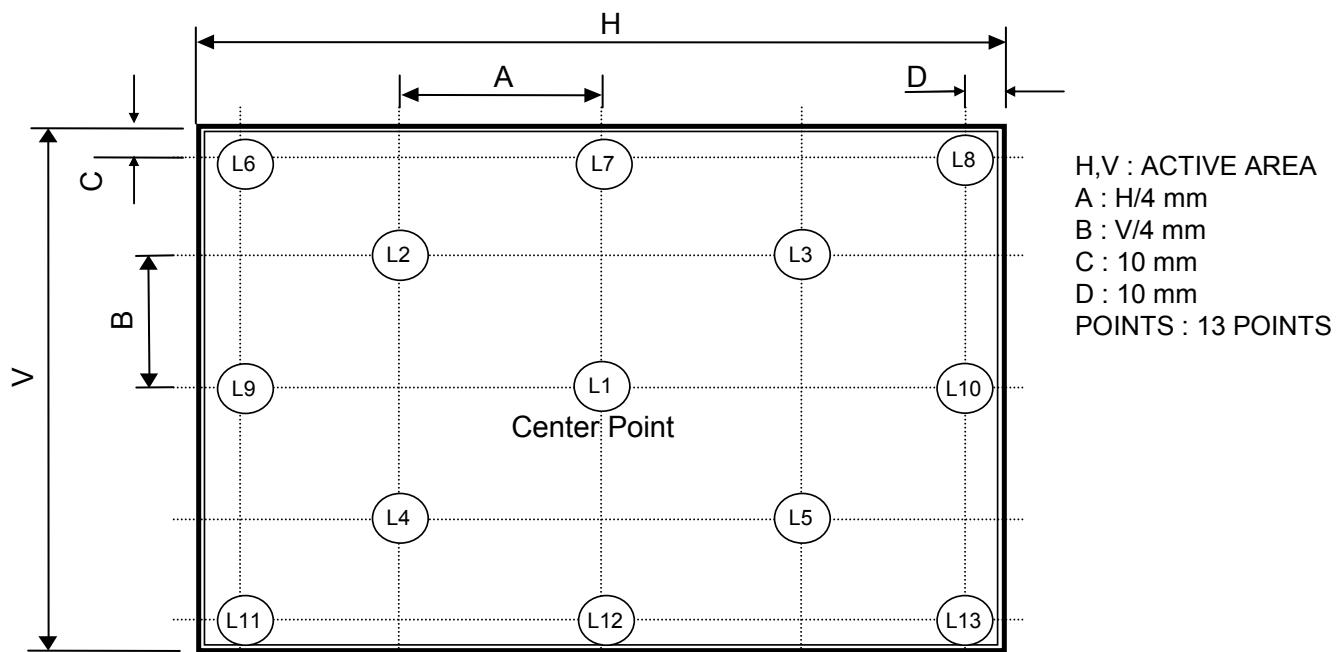
FIG. 3 Response Time

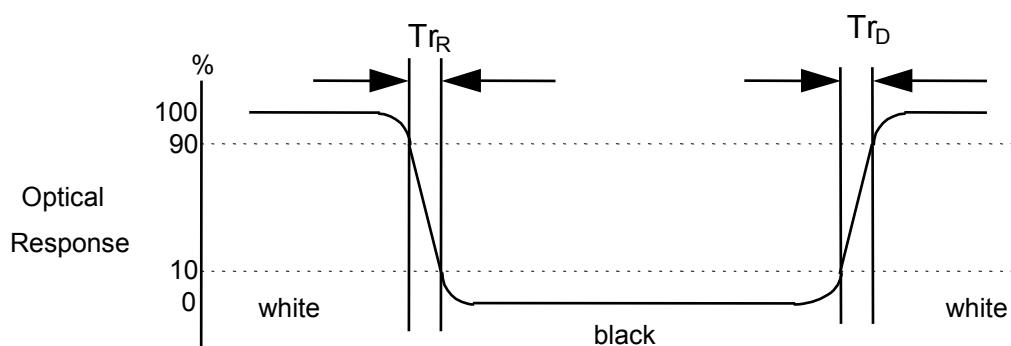
The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".



Product Specification

FIG. 4 Viewing angle
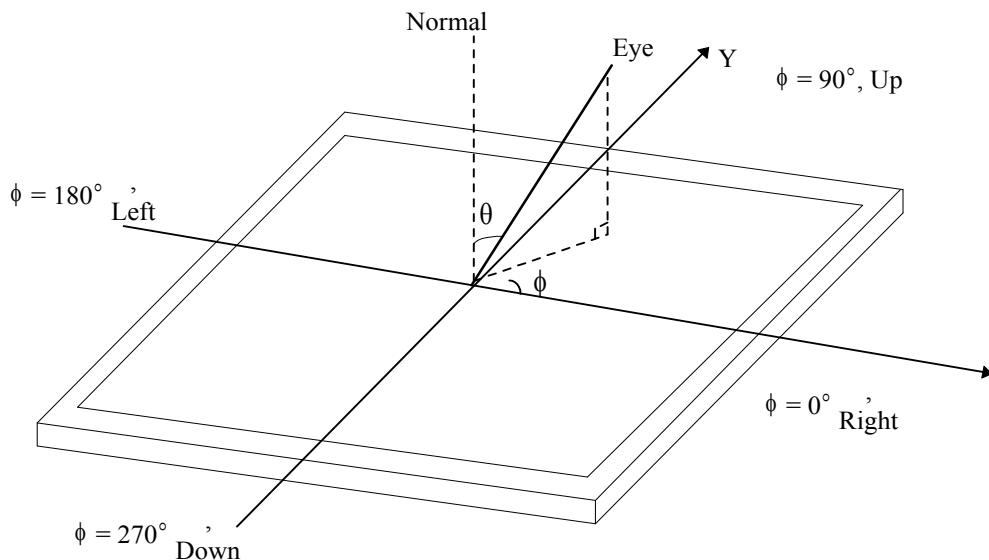
<Dimension of viewing angle range>



Product Specification

5. Mechanical Characteristics


The contents provide general mechanical characteristics for the model LP141WX1. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	319.5 ± 0.5mm
	Vertical	205.5 ± 0.5mm
	Depth	5.5mm (max)
Bezel Area	Horizontal	306.76 ± 0.5mm
	Vertical	193 ± 0.5mm
Active Display Area	Horizontal	303.74 mm
	Vertical	189.84 mm
Weight	415g (Typ.) 425g (Max.) W/O Inverter & Down Bracket	
Surface Treatment	Glare treatment of the front polarizer	

Product Specification

<FRONT VIEW>

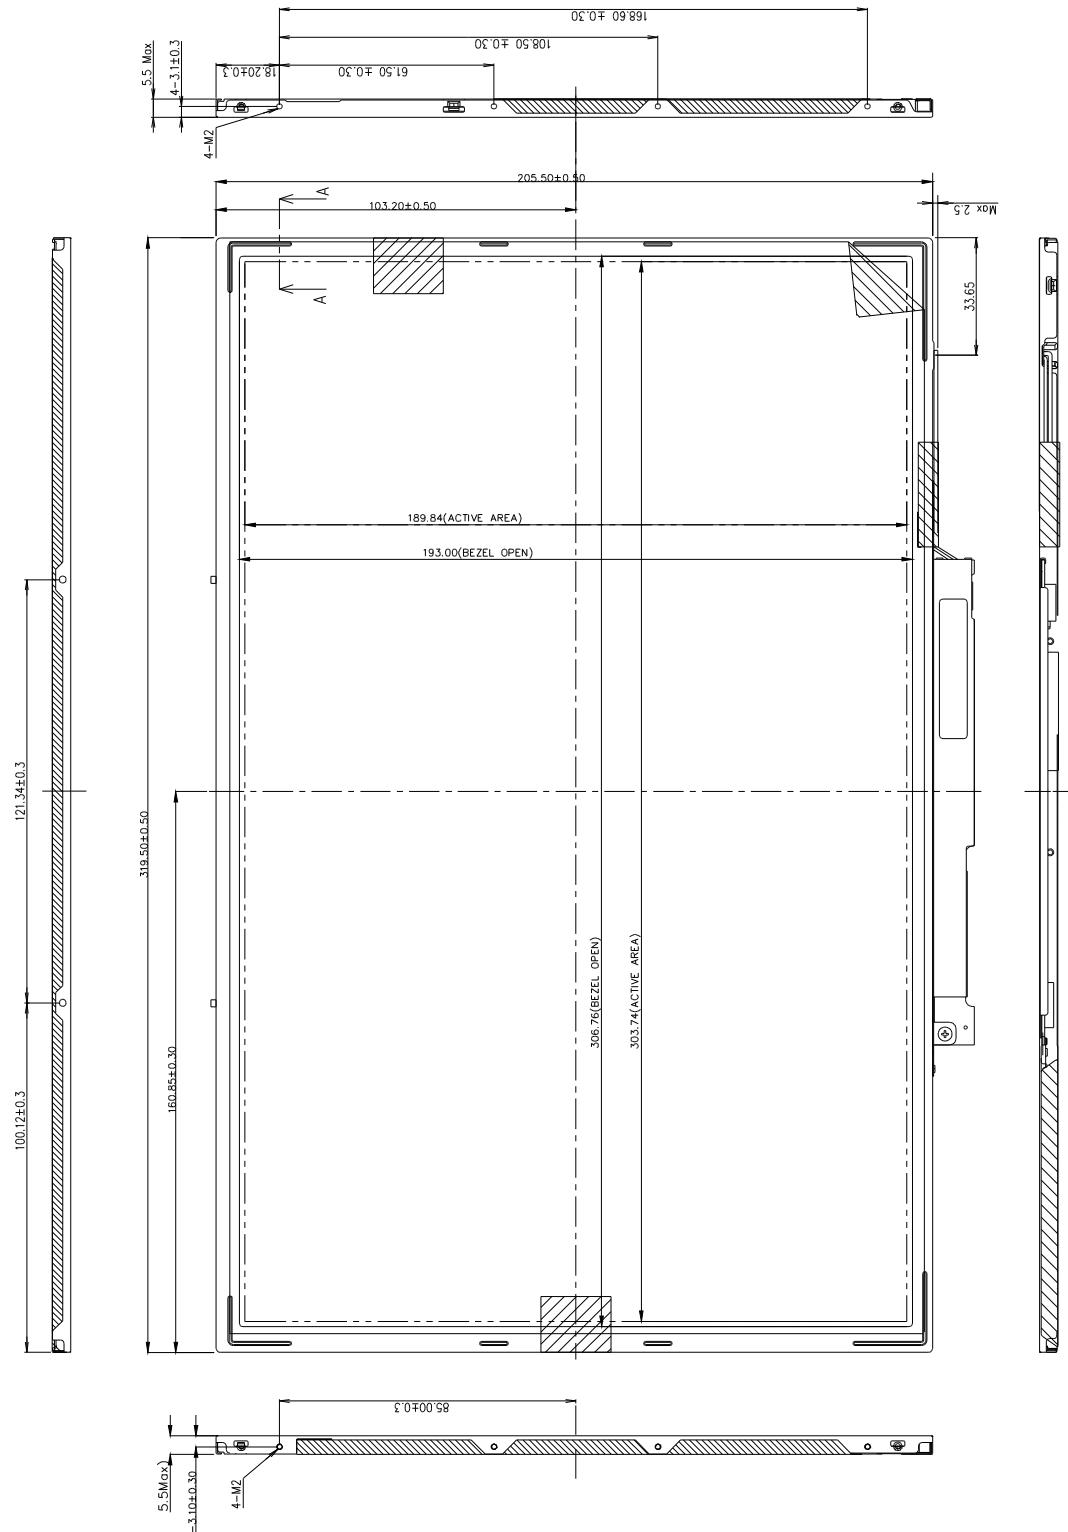
Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$



Product Specification


<REAR VIEW>

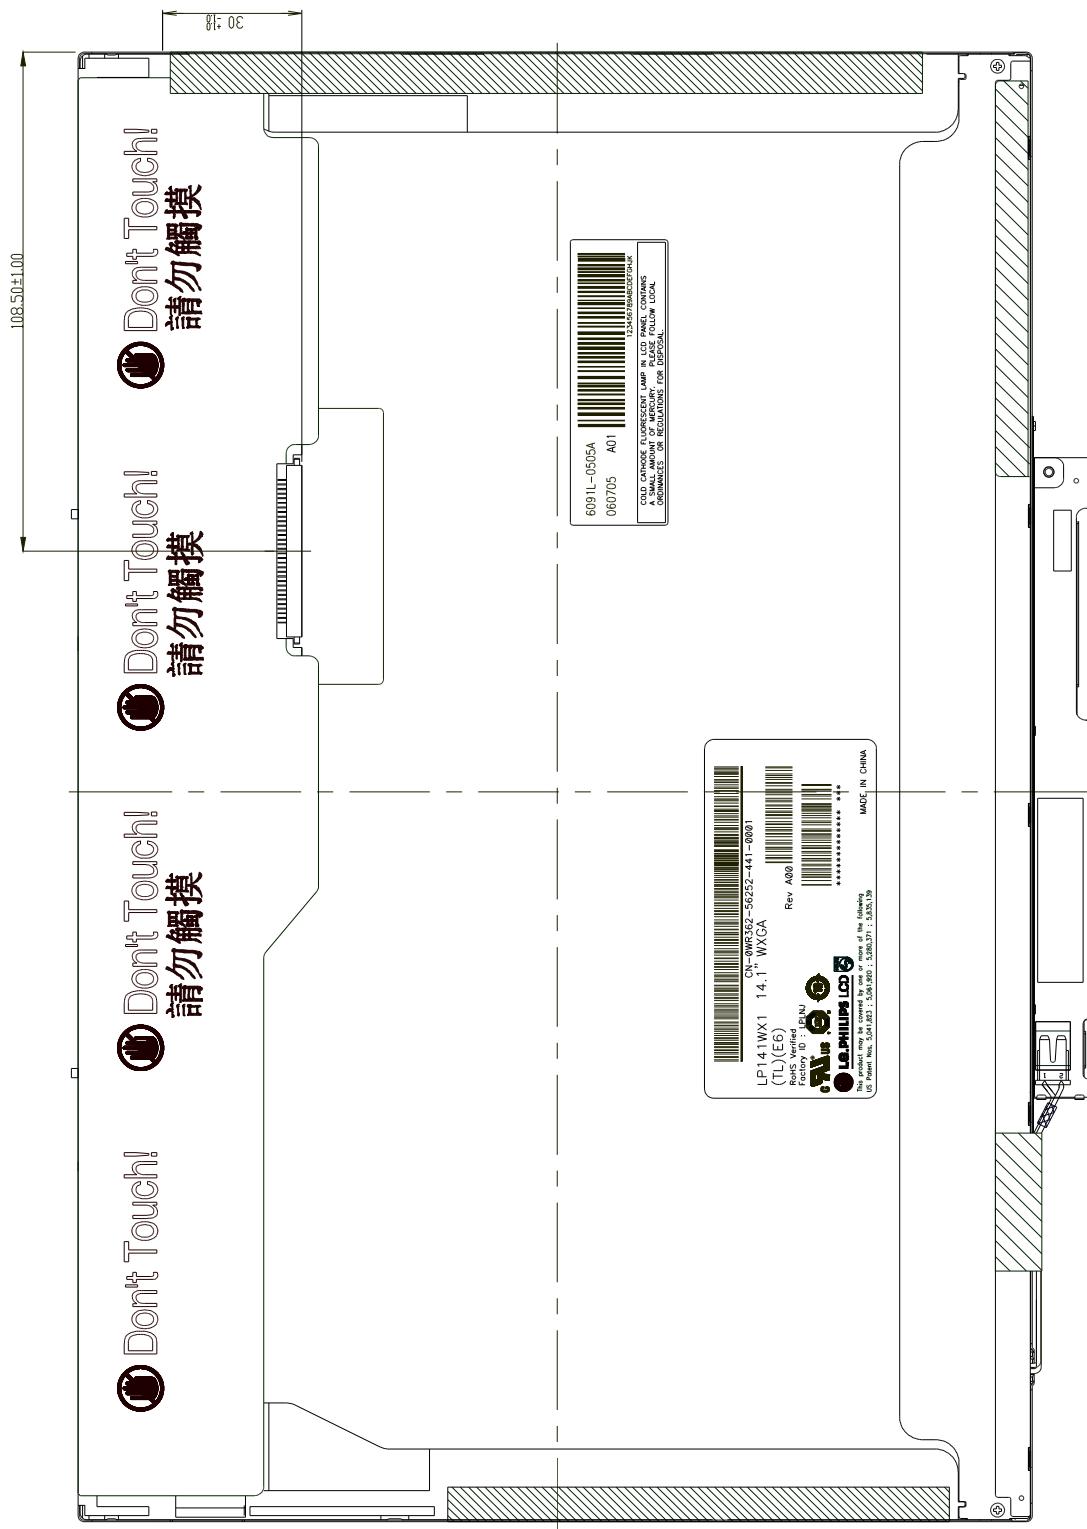Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$



Product Specification

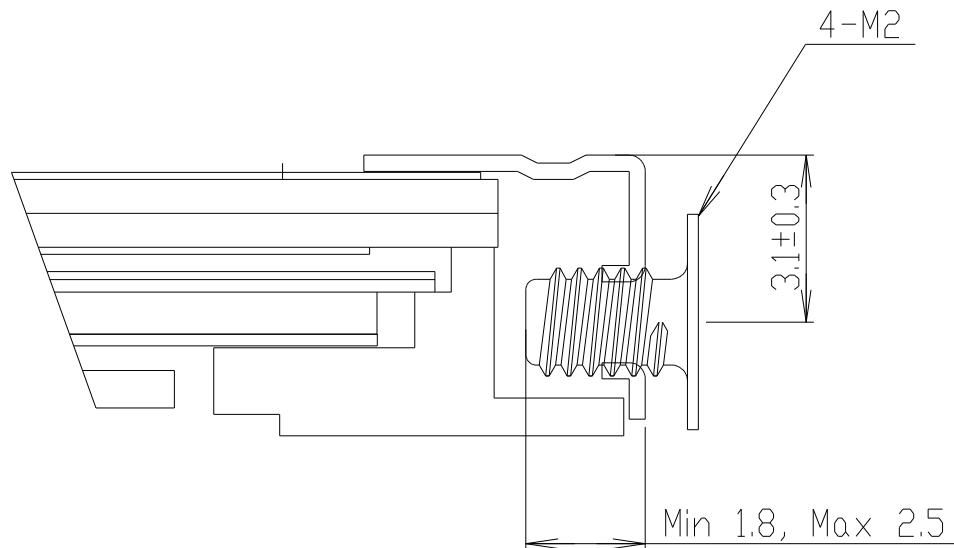[DETAIL DESCRIPTION OF SIDE MOUNTING SCREW]



SECTION A-A
SCALE 5/1

*SCREW(8ea) TORQUE : 2kgf.cm max

*Mounting SCREW Depth : 2.5mm max

Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

Product Specification

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

Product Specification

7. International Standards

7-1. Safety

- a) UL 60950, Third Edition, Underwriters Laboratories, Inc., Dated Dec. 11, 2000.
Standard for Safety of Information Technology Equipment, Including Electrical Business Equipment.
- b) CAN/CSA C22.2, No. 60950, Third Edition, Canadian Standards Association, Dec. 1, 2000.
Standard for Safety of Information Technology Equipment, Including Electrical Business Equipment.
- c) EN 60950 : 2000, Third Edition
IEC 60950 : 1999, Third Edition
European Committee for Electrotechnical Standardization(CENELEC)
EUROPEAN STANDARD for Safety of Information Technology Equipment Including Electrical Business Equipment.

7-2. EMC

- a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHz to 40GHz." American National Standards Institute(ANSI), 1992
- b) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.
- c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998
(Including A1: 2000)

Product Specification

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)

E : MONTH

D : YEAR

F ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one box : 30ea

b) Box Size : L490 * W393 * H287

Product Specification

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
 $V=\pm 200mV$ (Over and under shoot voltage)
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

Product Specification

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer.
This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Product Specification
APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3
EDID Data for Dell

2007.04.18

	Byte (hex)	Field Name and Comments	Value (hex)	Value (binary)
Header	00	Header	00	00000000
	01	Header	FF	11111111
	02	Header	FF	11111111
	03	Header	FF	11111111
	04	Header	FF	11111111
	05	Header	FF	11111111
	06	Header	FF	11111111
	07	Header	00	00000000
Vendor / Product EDID Version	08	EISA manufacturer code(3 Character ID) = LPL	32	00110010
	09	EISA manufacturer code(Compressed ACS II)	0C	00001100
	0A	Panel Supplier Reserved - Product code	00	00000000
	0B	Panel Supplier Reserved - Product code	00	00000000
	0C	LCD Module Serial No. - Preferred but Optional ("0" If not used)	00	00000000
	0D	LCD Module Serial No. - Preferred but Optional ("0" If not used)	00	00000000
	0E	LCD Module Serial No. - Preferred but Optional ("0" If not used)	00	00000000
	0F	LCD Module Serial No. - Preferred but Optional ("0" If not used)	00	00000000
	10	Week of Manufacture = 0 weeks	00	00000000
	11	Year of Manufacture = 2007 year	11	00010001
	12	EDID Structure version(EDID V1.3) # = 1	01	00000001
	13	EDID Revision # = 3	03	00000011
Display Parameters	14	Video Input Definition = Digital I/P (80h)	80	10000000
	15	Max H image size(Rounded to cm) = 30.4	1E	00011110
	16	Max V image size(Rounded to cm) = 18.9	13	00010011
	17	Display gamma = (gamma*100)-100 = 120	78	01111000
	18	Feature support(no DPMS, Active off, RGB, timing BLK 1)	0A	00001010
	19	Red/Green Low Bits (RxRy/GxGy)	08	00001000
Panel Color Coordinates	1A	Blue/White Low Bits (BxBy/WxWy)	85	10000101
	1B	Red X Rx = 0.582	95	10010101
	1C	Red Y Ry = 0.344	58	01011000
	1D	Green X Gx = 0.326	53	01010011
	1E	Green Y Gy = 0.547	8C	10001100
	1F	Blue X Bx = 0.158	28	00101000
	20	Blue Y By = 0.137	23	00100011
	21	White X Wx = 0.313	50	01010000
	22	White Y Wy = 0.329	54	01010100
	23	Established Timing I = 00h(If not used)	00	00000000
Established Timings	24	Established Timing II = 00h(If not used)	00	00000000
	25	Manufacturer's Timings = 00h(If not used)	00	00000000
	26	Standard Timing Identification ID1 (01h if not used)	01	00000001
Standard Timing ID	27	Standard Timing Identification ID1 (01h if not used)	01	00000001
	28	Standard Timing Identification ID2 (01h if not used)	01	00000001
	29	Standard Timing Identification ID2 (01h if not used)	01	00000001
	2A	Standard Timing Identification ID3 (01h if not used)	01	00000001
	2B	Standard Timing Identification ID3 (01h if not used)	01	00000001
	2C	Standard Timing Identification ID4 (01h if not used)	01	00000001
	2D	Standard Timing Identification ID4 (01h if not used)	01	00000001
	2E	Standard Timing Identification ID5 (01h if not used)	01	00000001
	2F	Standard Timing Identification ID5 (01h if not used)	01	00000001
	30	Standard Timing Identification ID6 (01h if not used)	01	00000001
	31	Standard Timing Identification ID6 (01h if not used)	01	00000001
	32	Standard Timing Identification ID7 (01h if not used)	01	00000001
	33	Standard Timing Identification ID7 (01h if not used)	01	00000001
	34	Standard Timing Identification ID8 (01h if not used)	01	00000001
	35	Standard Timing Identification ID8 (01h if not used)	01	00000001

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

	Byte (hex)	Field Name and Comments	Value (HEX)	Value (binary)
Timing Descriptor #1	36	Pixel Clock/10,000 (LSB) 72.3 MHz @ 60.01 Hz	3E	00111110
	37	Pixel Clock/10,000 (MSB)	1C	00011100
	38	Horizontal Active 1280 Pixels	00	00000000
	39	Horizontal Blanking(Thbp) 184 Pixels	B8	10111000
	3A	Horizontal Active / Horizontal Blanking(Thbp)	50	01010000
	3B	Vertical Active 800 Lines	20	00100000
	3C	Vertical Blanking (Tvbp) 23 Lines	17	00010111
	3D	Vertical Active : Vertical Blanking (Tvbp)	30	00110000
	3E	Horizontal Sync. Offset (Thfp) 48 Pixels	30	00110000
	3F	Horizontal Sync Pulse Width 32 Pixels	20	00100000
	40	Vertical Sync Offset(Tvbp) : Sync Width 3 Lines : 6 Lines	36	00110110
	41	Horizontal Vertical Sync Offset/Width upper 2bits	00	00000000
	42	Horizontal Image Size (mm) = 304 mm	30	00110000
	43	Vertical Image Size (mm) = 189.8 mm	BE	10111110
	44	Horizontal Image Size / Vertical Image Size	10	00010000
	45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
	47	Non-interlaced,Normal,no stereo,separate sync,H/V pol negatives, DE only note : LSB is set to "1" if panel is DE-timing only. H/V can be ignored.	19	00011001
Timing Descriptor #2	48	Flag	00	00000000
	49	Flag	00	00000000
	4A	Flag	00	00000000
	4B	Dummy Descriptor (if 00-0F,Manufacturer Specified)	00	00000000
	4C	Flag	00	00000000
	4D	Value = HSPWmin/2 (Pixel clks) = 0	00	00000000
	4E	Value = HSPWmax/2 (Pixel clks) = 0	00	00000000
	4F	Value = Thpbmin/2 (Pixel clks) = 0	00	00000000
	50	Value = Thpbmax/2 (Pixel clks) = 0	00	00000000
	51	Value = VSPWmin/2 (line Pulses) = 0	00	00000000
	52	Value = VSPWmax/2 (line Pulses) = 0	00	00000000
	53	Value = Tvpbmin/2 (line Pulses) = 0	00	00000000
	54	Value = Tvpbmax/2 (line Pulses) = 0	00	00000000
	55	Value = (Thpmun-HApixel clks)/2 (Pixel clks) = 0	00	00000000
	56	Value = (Thpmax-HApixel clks)/2 (Pixel clks) = 0	00	00000000
	57	Value = (Tvpmin-VAlines)/2 (line Pulses) = 0	00	00000000
	58	Value = (Tvpmax-VAlines)/2 (line Pulses) = 0	00	00000000
	59	Module "A" Revision = 0	00	00000000
Timing Descriptor #3 Dell specific information	5A	Flag	00	00000000
	5B	Flag	00	00000000
	5C	Flag	00	00000000
	5D	Data Type Tag (if FE ,ASC II Data string)	FE	11111110
	5E	Flag	00	00000000
	5F	Dell P/N 1st Character = W	57	01010111
	60	Dell P/N 2nd Character = R	52	01010010
	61	Dell P/N 3rd Character = 3	33	00110011
	62	Dell P/N 4th Character = 6	36	00110110
	63	Dell P/N 5th Character = 2	32	00110010
	64	LCD Supplier EEDID Revision # = 0.4	04	00000100
	65	Manufacturer P/N = 1	31	00110001
	66	Manufacturer P/N = 4	34	00110100
	67	Manufacturer P/N = 1	31	00110001
	68	Manufacturer P/N = W	57	01010111
	69	Manufacturer P/N = X	58	01011000
	6A	Manufacturer P/N = 1	31	00110001
	6B	Manufacturer P/N(If<13 char-> 0Ah, then terminate ASC II code 0Ah, set remaining char = 20h)	0A	00001010

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

	Byte (hex)	Field Name and Comments	Value (HEX)	Value (binary)
Timing Descriptor #4	6C	Flag	00	00000000
	6D	Flag	00	00000000
	6E	Flag	00	00000000
	6F	Data Type Tag (if FE ,ASC II Data string)	FE	11111110
	70	Flag	00	00000000
	71	SMBUS Value(Step #1) = 10	20	00100000
	72	SMBUS Value(Step #2) = 17	2F	00101111
	73	SMBUS Value(Step #3) = 24	3C	00111100
	74	SMBUS Value(Step #4) = 30	45	01000101
	75	SMBUS Value(Step #5) = 60	69	01101001
	76	SMBUS Value(Step #6) = 110	85	10000101
	77	SMBUS Value(Step #7) = 150	9D	10011101
	78	SMBUS Value(Step #8) = Max nits	CA	11001010
	79	Number of LVDS channels = 01 or 02 = 1Port	01	00000001
	7A	Panel Self Test(00- Not Present, 01- Present) = Yes	01	00000001
Checksum	7B	(If<13 char-> 0Ah, then terminate ASC II code 0Ah, set remaining char = 20h)	0A	00001010
	7C	(If<13 char-> 0Ah, then terminate ASC II code 0Ah, set remaining char = 20h)	20	00100000
	7D	(If<13 char-> 0Ah, then terminate ASC II code 0Ah, set remaining char = 20h)	20	00100000
Checksum	7E	Extension flag = 00	00	00000000
	7F	Checksum	8D	10001101