



LR3865


CMOS IC

2A LOW DROPOUT LINEAR REGULATOR

DESCRIPTION

The UTC **LR3865** belonged to low-dropout, linear regulators operate from 2.5V to 6V input and are guaranteed to deliver 2A. Wide range of preset output voltage options are available. Built-in low on-resistance transistor provides low dropout voltage and large output current. The UTC **LR3865** is designed and optimized for battery-powered systems to work with low noise.

The UTC **LR3865** consumes less than 0.5µA in shutdown mode. Other features include ultra low dropout voltage, current limiting protection, thermal shutdown protection and high ripple rejection ratio.

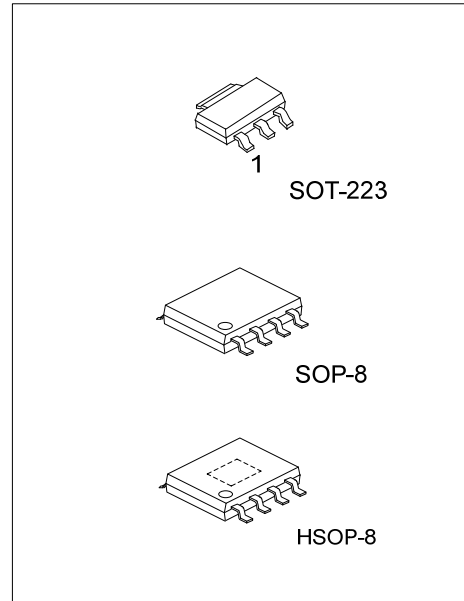

FEATURES

- * 2A Guaranteed Output Current
- * 0.5µA Shutdown Current
- * Current Limiting Protection
- * Thermal Shutdown Protection
- * Excellent Line/Load Transient

ORDERING INFORMATION

| Ordering Number | | Package | Pin Assignment | | | Packing |
|--------------------|--------------------|---------|----------------------------|---|---|-----------|
| Lead Free | Halogen Free | | 1 | 2 | 3 | |
| LR3865L-xx-AA3-A-R | LR3865G-xx-AA3-A-R | SOT-223 | G | O | I | Tape Reel |
| LR3865L-xx-S08-X-R | LR3865G-xx-S08-X-R | SOP-8 | Refer to PIN CONFIGURATION | | | Tape Reel |
| LR3865L-xx-SH2-R | LR3865G-xx-SH2-R | HSOP-8 | Refer to PIN CONFIGURATION | | | Tape Reel |

Notes: 1. xx: Output Voltage, refer to Marking Information.


2. Pin Assignment: G:GND O:OUT I:VIN

| | |
|--|--|
| <p>LR3865G-xx-AA3-X-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Pin Code (3) Package Type (4) Output Voltage Code (5) Green Package | <ul style="list-style-type: none"> (1) R: Tape Reel (2) refer to PIN CONFIGURATION (3) AA3: SOT-223, S08: SOP-8, SH2: HSOP-8 (4) xx: Refer to Marking Information (5) G: Halogen Free and Lead Free, L: Lead Free |
|--|--|

MARKING INFORMATION

| PACKAGE | VOLTAGE CODE | MARKING |
|-----------------|---|---|
| SOT-223 | 15: 1.5V 18: 1.8V 20: 2.0V 25: 2.5V 30: 3.0V 33: 3.3V 50: 5.0V AD: ADJ | <p>LR3865 XX 1 2 3</p> <p>Pin Code ← Voltage Code ←</p> <p>→ Date Code →</p> <p>L: Lead Free G: Halogen Free</p> |
| SOP-8 HSOP-8 | 30: 3.0V 33: 3.3V 50: 5.0V AD: ADJ | <p>UTC LR3865 1 2 3 4</p> <p>Pin Code ← Voltage Code ←</p> <p>→ Date Code →</p> <p>→ Lot Code →</p> <p>L: Lead Free G: Halogen Free</p> |


PIN CONFIGURATION

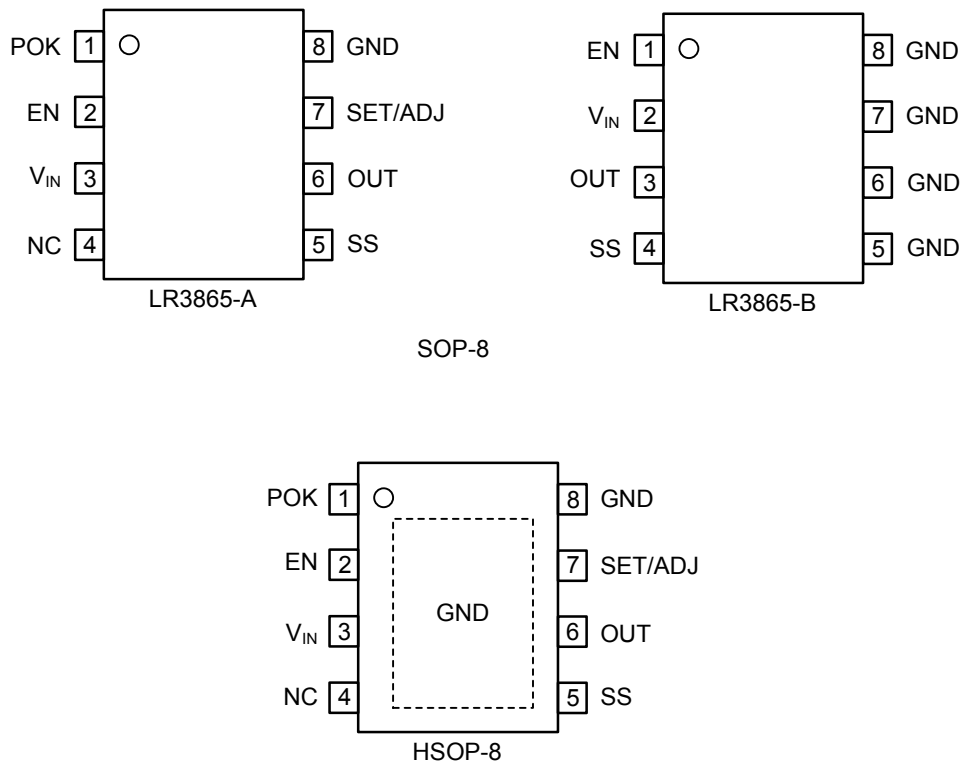

■ PIN DESCRIPTION

| SOT-223 | PIN No. | | | PIN NAME | DESCRIPTION |
|---------|---------|-------|-------------|-----------------|---|
| | SOP-8 | | HSOP-8 | | |
| | A | B | | | |
| 1 | 8 | 5 ~ 8 | 8 | GND | Ground |
| 2 | 6 | 3 | 6 | OUT | Output |
| 3 | 3 | 2 | 3 | V _{IN} | Power Input Voltage. Supply voltage can range from 2.5V to 6V. Bypass with a 10 μ F capacitor to GND. |
| - | 1 | - | 1 | POK | Open-Drain Power-ok Output. POK Remains low while the output voltage is below the POK threshold. Connect a 100 kohm Pullup resistor from POK to OUT |
| - | 2 | 1 | 2 | EN | Active-High Enable Input. A logic low at EN reduces supply current to 0.5 μ A. In shutdown, the POK output is low. Connect $\overline{\text{EN}}$ to V _{IN} for normal operation. |
| - | 5 | 4 | 5 | SS | Soft start time setting. For adjustable soft start time version, connect a capacitor from SS to gnd to set the soft start time. |
| - | 7 | - | 7 | SET | Voltage-setting Input. Connect SET to GND for preset output. Connect an external resistive voltage-divider from OUT to SET to set the output voltage between 0.6V and 4.5V. The SET regulation voltage is 600mV |
| | | | | ADJ | Voltage-adjust Input. Connect an external resistive voltage-divider from OUT to ADJ to set the output voltage between 0.6V and 4.5V. The ADJ regulation voltage is 600mV |
| - | - | - | Exposed Pad | GND | Connect exposed pad to GND. |

■ BLOCK DIAGRAM

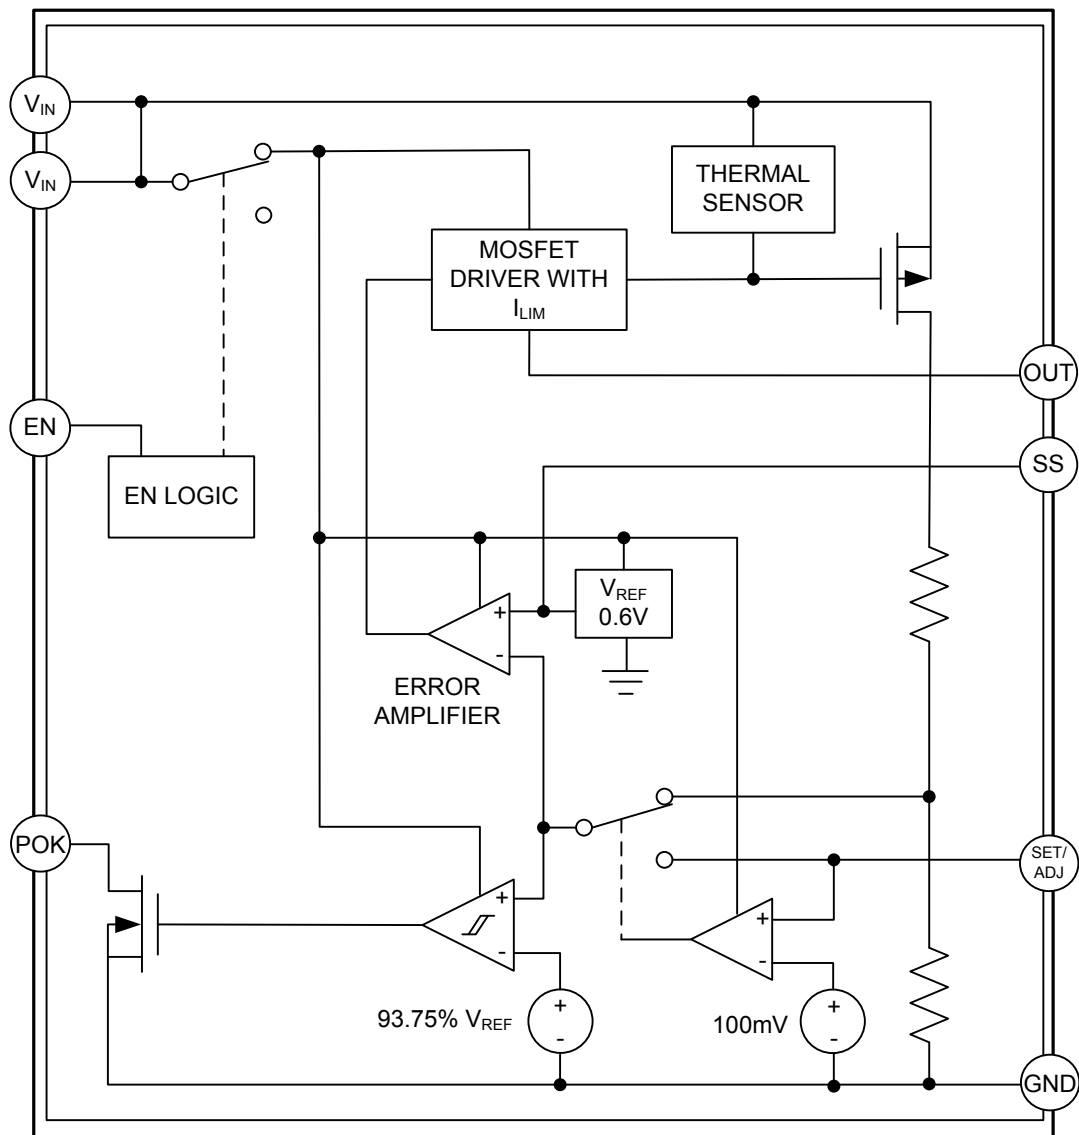

■ ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|-----------------------|---------|-----------|------------|--------------------|
| Supply Voltage | | V_{IN} | 6.5 | V |
| Power Dissipation | SOT-223 | P_D | 0.61 | W |
| | SOP-8 | | 0.67 | W |
| | HSOP-8 | | 2 | W |
| Junction Temperature | | T_J | +125 | $^{\circ}\text{C}$ |
| Operating Temperature | | T_{OPR} | -40 ~ +125 | $^{\circ}\text{C}$ |
| Storage Temperature | | T_{STG} | -65 ~ +150 | $^{\circ}\text{C}$ |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|---------------------|---------|---------------|-------------|-----------------------------|
| Junction to Ambient | SOT-223 | θ_{JA} | 165 | $^{\circ}\text{C}/\text{W}$ |
| | SOP-8 | | 150 | $^{\circ}\text{C}/\text{W}$ |
| | HSOP-8 | | 50 (Note1) | $^{\circ}\text{C}/\text{W}$ |
| Junction to Case | SOT-223 | θ_{JC} | 15 | $^{\circ}\text{C}/\text{W}$ |
| | SOP-8 | | 45 | $^{\circ}\text{C}/\text{W}$ |
| | HSOP-8 | | 15 (Note 2) | $^{\circ}\text{C}/\text{W}$ |

Notes: 1. θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air. The exposed pad of HSOP-8 is soldered directly on the PCB.
2. The Thermal Pad Temperature is measured on the PCB copper area connected to the thermal pad of package.

■ ELECTRICAL CHARACTERISTICS


($T_A = 25^\circ\text{C}$, $V_{IN} = \text{OUT} + 1\text{V}$ or $V_{IN} = 2.5\text{V}$ whichever is greater, $C_{IN} = 10\mu\text{F} + 0.1\mu\text{F}$, $C_{OUT} = 10\mu\text{F} + (0.1\mu\text{F} + 0.1\mu\text{F})$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------------------|---|---|-------|-------|-------|------------------|
| Input Voltage | V_{IN} | | Note1 | | 6 | V |
| Output Voltage Accuracy (Preset Mode) | OUT | $T_A = 25^\circ\text{C}$, $I_{OUT} = 1\text{mA} \sim 2\text{A}$ | -2 | | 2 | % |
| Maximum Output Current | I_{OUT} | | | 3.8 | | A |
| Short-Circuit Current Limit | I_{LIMIT} | OUT=0V | | 3.8 | | A |
| Ground Pin Current | I_Q | $I_{OUT} = 1\text{mA}$ | | 200 | | μA |
| | I_{OFF} | EN=GND | | 0.5 | 5 | |
| Dropout Voltage (Note 2) | V_D | $I_{OUT} = 2.0\text{A}$ | | | 650 | mV |
| Line Regulation (Note 3) | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $V_{IN} = \text{OUT} + 1\text{V} \sim 6\text{V}$ | | 0.08 | 0.55 | %/V |
| Load Regulation (Note 3, 4) | ΔOUT | $V_{IN} = \text{OUT} + 1\text{V}$, $\text{OUT} = 2.5\text{V}$, $I_{OUT} = 10\text{mA} \sim 2.0\text{A}$ | | 0.3 | 1.0 | % |
| Power Supply Rejection Ratio | PSRR | F=1Khz | | 45 | | dB |
| Shutdown Threshold | V_{IH} | | 1.8 | | | V |
| | V_{IL} | | | | 0.5 | V |
| Thermal Shutdown Temperature | T_{SHDN} | | | 165 | | $^\circ\text{C}$ |
| Thermal Shutdown Hysteresis | DT_{SHDN} | | | 30 | | $^\circ\text{C}$ |
| ADJ Voltage | V_{ADJ} | Measured on SET/ADJ, $I_{OUT} = 10\text{mA}$ | 0.588 | 0.6 | 0.612 | V |
| ADJ Mode Threshold | | | | 100 | | mV |
| Adjustable Output Voltage | | | 0.8 | | 4.5 | V |
| SoftStart Current | I_{SS} | $V_{SS} = 0$ | | 1.2 | | μA |
| Power-OK Threshold | V_{pokth} | Referred to OUT (nominal) | | 93.75 | | % |
| Power-OK Hysteresis | V_{pokhys} | | | 6.25 | | % |
| Power-OK output Low Voltage | V_{pokL} | Sinking 1mA | | | 0.4 | V |


- Notes: 1. The minimum operating value for V_{IN} is equal to either $[\text{OUT}_{(NOM)} + V_D]$ or 2.5V, whichever is greater.
 2. Dropout voltage is defined as the voltage from the input to output when output is 2% below the nominal value. Dropout voltage specification applies only to output voltage of 2.5V and above.
 3. Output voltage line regulation is defined as the change in output voltage from the nominal value resulting from a change in the input line voltage. Output voltage load regulation is defined as the change in output voltage from the nominal value as the load current increases from no load to full load.
 4. Regulation is measured at constant junction temperature by using a 10ms current pulse.

■ TYPICAL APPLICATION CIRCUIT

For 3 Pin

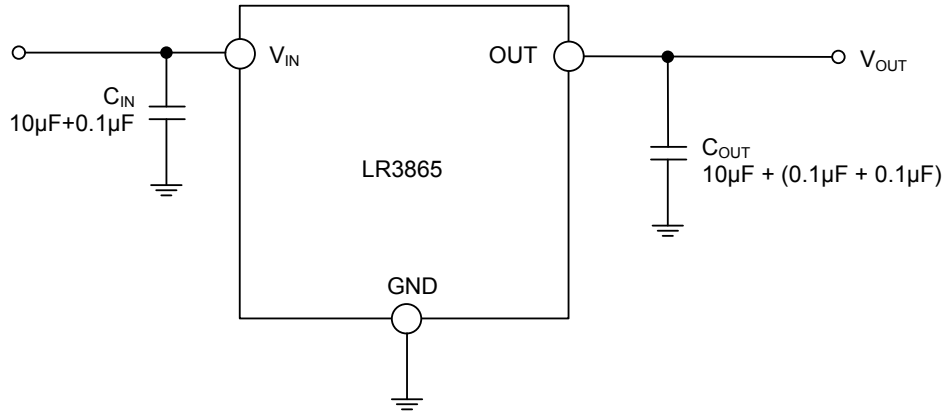

For 8 Pin

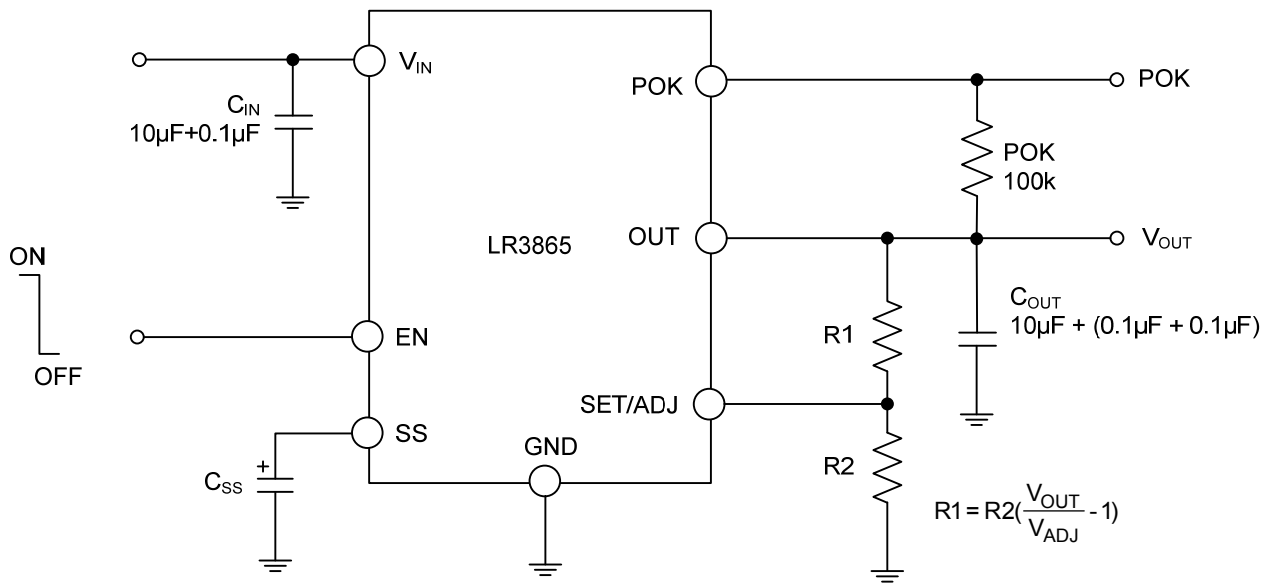

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.