

Linear Systems replaces discontinued Siliconix JPAD100

The JPAD100 is a low leakage Pico-Amp Diode packaged in TO-92

The LSJPAD100 extremely low-leakage diode provides a superior alternative to conventional diode technology when reverse current (leakage) must be minimized. The LSJPAD100 features a leakage current of ≤ 100 pA and is well suited for use in applications such as input protection for operational amplifiers.

LSJPAD100 Benefits:

- Negligible Circuit Leakage Contribution
- Circuit "Transparent" Except to Shunt High-Frequency Spikes
- Simplicity of Operation

LSJPAD100 Applications:

- Op Amp Input Protection
- Multiplexer Overvoltage Protection

FEATURES

DIRECT REPLACEMENT FOR SILICONIX LSJPAD100

REVERSE BREAKDOWN VOLTAGE	$BV_R \geq -35V$
ULTRALOW LEAKAGE	≤ 100 pA
REVERSE CAPACITANCE	$C_{RSS} \leq 2.0pF$

ABSOLUTE MAXIMUM RATINGS

@ 25°C (unless otherwise noted)

Maximum Temperatures

Storage Temperature	-65°C to +150°C
Operating Junction Temperature	-55°C to +135°C

Maximum Power Dissipation

Continuous Power Dissipation	350mW
------------------------------	-------

MAXIMUM CURRENT

Forward Current (Note 1)	10mA
--------------------------	------

LSJPAD100 ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise noted)

SYMBOL	CHARACTERISTICS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
BV_R	Reverse Breakdown Voltage	-35	--	--	V	$I_R = 1\mu A$
V_F	Forward Voltage	--	0.8	1.5	V	$I_F = 5mA$
C_{RSS}	Total Reverse Capacitance	--	1.5	2	pF	$V_R = -5V, f = 1MHz$
I_R	Maximum Reverse Leakage Current	--	--	-100	pA	$V_R = -20V$

Notes:

1. Absolute maximum ratings are limiting values above which LSJPAD100 serviceability may be impaired.


Available Packages:

LSJPAD100 in TO-92
LSJPAD100 available as bare die

Please contact Microcross for full package and die dimensions



TO-92 (Bottom View)

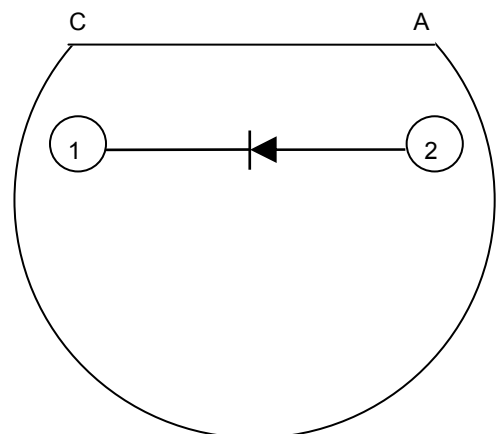

Microcross Components Europe

Tel: +44 1603 788967
Email: chipcomponents@microcross.com
Web: <http://www.microcross.com/distribution.com>