

# Current Transducer LTC 1000-T

$$I_{PN} = 1000 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



## Electrical data

$I_{PN}$	Primary nominal r.m.s. current	1000	A
$I_P$	Primary current, measuring range @ 24 V	0 .. $\pm 2400$ <sup>1)</sup>	A
$\dot{I}_P$	Max overload not measurable	10 / 10	kA/ms
$R_M$	Measuring resistance	$R_{M \min}$ $R_{M \max}$	
	with $\pm 15 \text{ V}$	@ $\pm 1000 \text{ A}_{\max}$	0   15 $\Omega$
		@ $\pm 1200 \text{ A}_{\max}$	0   7 $\Omega$
	with $\pm 24 \text{ V}$	@ $\pm 1000 \text{ A}_{\max}$	0   50 $\Omega$
	@ $\pm 2000 \text{ A}_{\max}$	0   7 $\Omega$	
$I_{SN}$	Secondary nominal r.m.s. current	200	mA
$K_N$	Conversion ratio	1 : 5000	
$V_C$	Supply voltage ( $\pm 5 \%$ )	$\pm 15 \dots 24$	V
$I_C$	Current consumption	$< 30 (@ \pm 24 \text{ V}) + I_S$	mA
$V_d$	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	13.4 <sup>2)</sup>	kV
		1.5 <sup>3)</sup>	kV
$V_e$	R.m.s. voltage for partial discharge extinction	$> 2.8$	kV

## Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0
- Railway equipment.

## Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

## Accuracy - Dynamic performance data

$X_G$	Overall accuracy @ $I_{PN}, T_A = 25^\circ\text{C}$	$< \pm 0.4$	%
		@ $I_{PN}, T_A = -40^\circ\text{C} \dots +85^\circ\text{C}$	$< \pm 1$
$e_L$	Linearity	$< 0.1$	%
		Max	
$I_O$	Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$	$\pm 0.5$	mA
$I_{OT}$	Thermal drift of $I_O$ $-40^\circ\text{C} \dots +85^\circ\text{C}$	$\pm 1$	mA
$t_r$	Response time <sup>4)</sup> @ 90 % of $I_{PN}$	$< 1$	$\mu\text{s}$
$di/dt$	di/dt accurately followed	$> 100$	A/ $\mu\text{s}$
$f$	Frequency bandwidth (-1 dB)	DC .. 100	kHz

## Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.


## General data

$T_A$	Ambient operating temperature	$-40 \dots +85$	$^\circ\text{C}$
$T_S$	Ambient storage temperature	$-45 \dots +90$	$^\circ\text{C}$
$R_S$	Secondary coil resistance @ $T_A = 85^\circ\text{C}$	44	$\Omega$
$m$	Mass	1270	g
	Standards	EN50155(01.12.20)	

- Notes : <sup>1)</sup> With a di/dt of  $> 5 \text{ A}/\mu\text{s}$   
<sup>2)</sup> Between primary and secondary + shield  
<sup>3)</sup> Between secondary and shield  
<sup>4)</sup> With a di/dt of  $100 \text{ A}/\mu\text{s}$ .

030528/0

## Dimensions LTC 1000-T (in mm. 1 mm = 0.0394 inch)

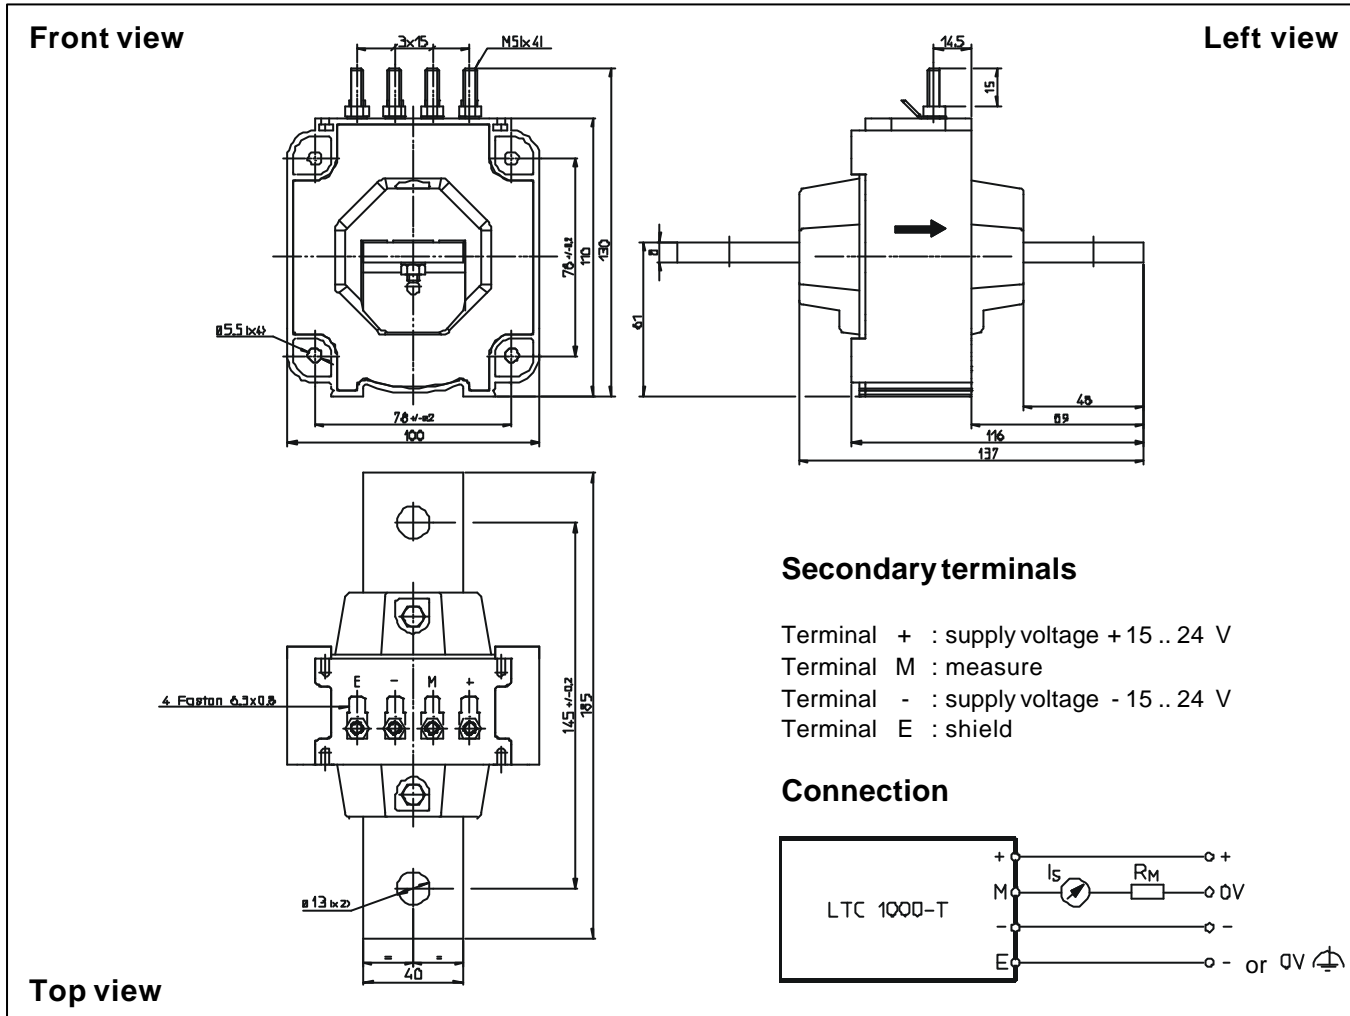

### Mechanical characteristics

- General tolerance  $\pm 1$  mm
- Fixing the transducer
  - 2 holes  $\varnothing 13$  mm
  - or by the primary bar
  - 2 steel screws M12
  - Fastening torque max 24.5 Nm
- Connection of secondary
  - M5 threaded studs
  - Fastening torque max 2.2 Nm or 1.62 Lb.-Ft.
  - Faston 6.3 x 0.8 mm

### Remarks

- $I_s$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C.
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.