



Spec No. :DS50-2023-0015 Effective Date: 03/08/2023

Revision: -

**LITE-ON DCC** 

RELEASE

BNS-OD-FC001/A4



## 1. Description

Lite-On offers a broad range of discrete infrared components for application such as remote control, IR wireless data transmission, security alarm & etc. Customers need infrared solutions featuring high power, high speed and wide viewing angels. The product line includes GaAs 940nm IREDs, AlGaAs high speed 850nm IREDs, PIN Photodiodes and Phototransistors. Photodiodes and Phototransistors can be provided with a filter that reduces digital light noise in the sensor function, which enables a high signal-to-noise ratio.


#### 1. 1. Features


- High power LED light source
- Peak wavelength 930nm
- Package type: surface mount
- Meet ROHS, Green Product


### 1.2. Applications

- Infrared emitter
- PCB Mounted Infrared Sensor

### 2. Outline Dimensions





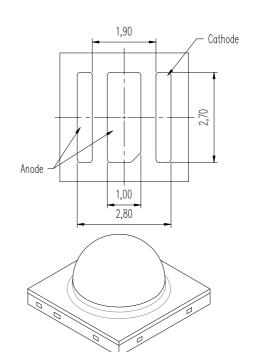

#### Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.1mm (.004") unless otherwise noted.
- 3. Specifications are subject to change without notice.



## 3. Absolute Maximum Ratings at TA=25℃

Parameter	Maximum Rating	Unit	
Power Dissipation	3.8	W	
Peak Forward Current(300pps, 10µs pulse)	2	А	
DC Forward Current	1	А	
Reverse Voltage	5	V	
Thermal Resistance (Rth of junction to soldering pad)	9	K/W	
Operating Temperature Range	-40℃ to + 85℃		
Storage Temperature Range	-55℃ to + 100℃		
Infrared Soldering Condition	260℃ for 10 Seconds Max.		

## 4. Electrical / Optical Characteristics at TA=25℃

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Radiant Intensity	lε	390	480	650	mW/sr	I <sub>F</sub> = 500mA
Total Radiant Flux	Фе	-	700	-	mW	I <sub>F</sub> = 500mA
Peak Emission Wavelength	$\lambda_{Peak}$	916	930	940	nm	I <sub>F</sub> = 500mA
Spectral Line Half-Width	Δλ	-	35	-	nm	I <sub>F</sub> = 500mA
Forward Voltage	V <sub>F</sub>	2.4	2.9	3.4	V	I <sub>F</sub> = 500mA
Reverse Current	I <sub>R</sub>	-	-	10	μA	V <sub>R</sub> = 5V
Rise/Fall Time	Tr/Tf	-	30	-	ns	10%~90%
Viewing Angle	2θ <sub>1/2</sub>	-	70	-	deg	

## NOTE:


<sup>1.</sup>  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.


<sup>2.</sup> Reverse voltage  $(V_R)$  condition is applied to IR test only. The device is not designed for reverse operation.



## 5. Typical Electrical / Optical Characteristics Curves

(25℃ Ambient Temperature Unless Otherwise Noted)








FIG.2 FORWARD CURRENT VS. AMBIENT TEMPERATURE





FIG.3 FORWARD CURRENT VS. FORWARD VOLTAGE

FIG.4 RELATIVE RADIANT INTENSITY VS. AMBIENT TEMPERATURE







FIG.5 RELATIVE RADIANT INTENSITY VS. FORWARD CURRENT


FIG.6 RADIATION DIAGRAM



## **6. Suggest Soldering Pad Dimensions**




## 7. Package Dimensions Of Tape And Reel

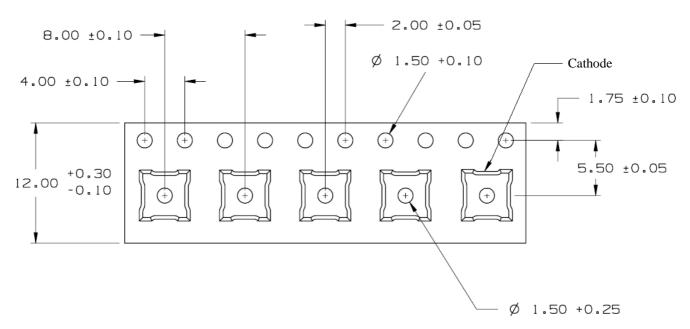

Note: All dimensions are in millimeters (inches).



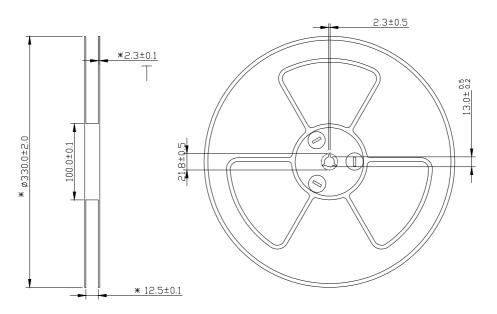

Note: 1. All dimensions are in millimeters (inches).

- 2. Empty component pockets sealed with top cover tape.
- 3. 13 inch reel-2400 pieces per reel.
- 4. The maximum number of consecutive missing parts is two.
- 5. In accordance with ANSI/EIA 481-1-A-1994 specifications.

#### 8. CAUTIONS

#### 8.1. Application

The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications). Consult Liteon's Sales in advance for information on applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).

#### 8.2. Storage

The package is sealed:

The LEDs should be stored at 30°C or less and 90%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside. The package is opened:

The storage ambient for the LEDs should not exceed 30°C temperature or 60% relative humidity.

It is recommended that LEDs out of their original packaging are IR-reflowed within one week.

For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant, or in a desiccator with nitrogen ambient.

LEDs stored out of their original packaging for more than one week should be baked at about 60 deg C for at least 20 hours before solder assembly.

#### 8.3. Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LEDs if necessary.



#### 8.4. Soldering

**Recommended soldering conditions:** 

Reflow Soldering		Soldering iron		
Pre-heat Pre-heat time Peak temperature Soldering time	150~200℃ 120 seconds Max. 260℃ Max. 10 seconds Max.(Max. two times)	Temperature Soldering time	300℃ Max. 3 seconds Max. (one time only)	

Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.


However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.

LITE-ON Runs both component-level verification using in-house KYRAMX98 reflow chambers and board-level assembly.

The results of this testing are verified through post-reflow reliability testing.

Profiles used at LITE-ON are based on JEDEC standards to ensure that all packages can be successfully and reliably surface mounted.

Followed figure shows a sample temperature profile compliant to JEDEC standards.

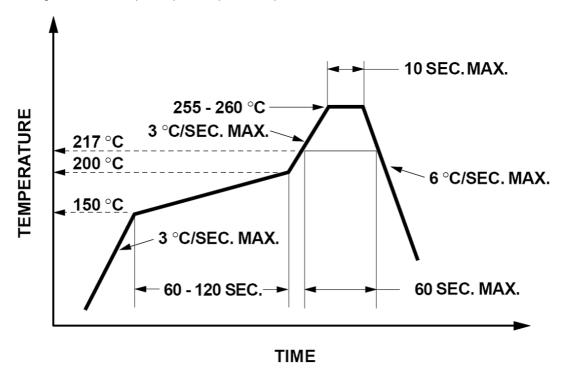

You can use this example as a generic target to set up your reflow process.

You should adhere to the JEDEC profile limits as well as specifications and recommendations from the solder paste manufacturer to avoid damaging the device and create a reliable solder joint.







#### 8.5. Drive Method

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

### Circuit model (A)

## Circuit model (B)





- (A) Recommended circuit
- (B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

### 9. Others

The appearance and specifications of the product may be modified for improvement, without prior notice.