



DATE : March 29, 2012.

**SAMSUNG TFT-LCD****MODEL NO : LTN156AT27-H02**

NOTE - Extension code [ -H02 ]  
→ LTN156AT27-H  
Surface type [ **Glare** ]

The information described in this SPEC can not be changed without SEC's permission.  
The information described in this SPEC is preliminary and can be changed without prior notice

**Application Engineer Group**  
**SAMSUNG ELECTRONICS CO., LTD.**

**Samsung Secret**

<b>Doc.No.</b>	LTN156AT27-H02	<b>Rev.No</b>	04-PI-G-120329	<b>Page</b>	1 / 24
----------------	----------------	---------------	----------------	-------------	--------

## CONTENTS

General Description	----- ( 3 )
1. Absolute Maximum Ratings	----- ( 4 )
1.1 Absolute Ratings of environment	
1.2 Electrical Absolute Ratings	
2. Optical Characteristics	----- ( 6 )
3. Electrical Characteristics	----- ( 9 )
3.1 TFT LCD Module	
3.2 Backlight Unit	
3.3 LED Driver	
4. Block Diagram	----- ( 12 )
4.1 TFT LCD Module	
4.2 Back-Light Unit	
5. Input Terminal Pin Assignment	----- ( 13 )
5.1 Input Signal & Power	
5.2 LVDS Interface	
5.3 Timing Diagrams of LVDS For Transmitting	
5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color.	
5.5 Pixel format	
6. Interface Timing	----- ( 18 )
6.1 Timing Parameters	
6.2 Timing Diagrams of interface Signal	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	----- ( 20 )
8. General Precautions	----- ( 22 )

**Samsung Secret**

## GENERAL DESCRIPTION

### DESCRIPTION

LTN156AT27-H02 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as switching devices. This model is composed of a TFT LCD panel, a driver circuit and a backlight system. The resolution of a 15.6" contains 1366 x 768 pixels and can display up to 262,144 colors. 6 O'clock direction is the Optimum viewing angle.

### FEATURES

- High contrast ratio
- HD (1366 x 768 pixels ) resolution
- Low power consumption
- Fast response time
- LED Back Light with embedded LED Driver
- DE (Data enable) only mode
- 3.3V LVDS Interface
- Onboard EEDID chip
- Green product (RoHS compliant)

### APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC

## GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	344.232 (H) x 193.536 (V) (15.6" diagonal)	mm	
Driver element	a-Si TFT active matrix		
Display colors	262,144		
Number of pixel	1366 x 768	pixel	16 : 9
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.252 (H) x 0.252 (V) (TYP.)	mm	
Display Mode	Normally white		
Surface treatment	Haze 0, Hardness 3H		Glare

**Samsung Secret**

## Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	358.8	359.3	359.8	mm	
	Vertical (V)	209.0	209.5	210.0	mm	Module ~ Module
	Depth (D)	-	-	5.5	mm	(1)
Weight		-	-	450	g	

Note (1) Measurement condition of outline dimension

- . Equipment : Vernier Calipers
- . Push Force : 750g · f (minimum)

## 1. ABSOLUTE MAXIMUM RATINGS


### 1.1 ENVIRONMENTAL ABSOLUTE RATINGS

Item	Symbol	Min.	Max.	Unit	Note
Storage temperate	TSTG	-20	60	°C	(1)
Operating temperate (Temperature of glass surface)	TOPR	0	50	°C	(1)
Shock ( non-operating )	Snop	-	240	G	(2),(4)
Vibration (non-operating)	Vnop	-	2.41	G	(3),(4)

Note (1) Temperature and relative humidity range are shown in the figure below.

90 % RH Max. ( $40^{\circ}\text{C} \geq T_a$ )

Maximum wet - bulb temperature at  $39^{\circ}\text{C}$  or less. ( $T_a > 40^{\circ}\text{C}$ ) No condensation

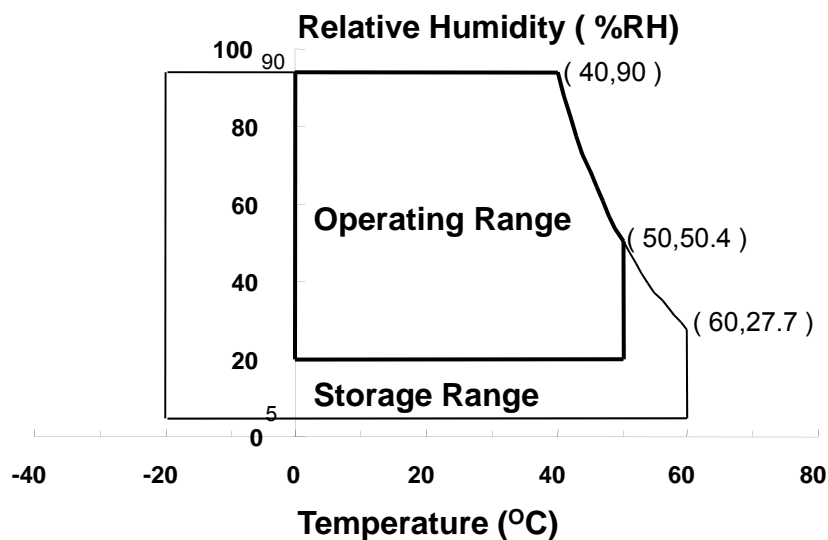

(2) 2ms, half sine wave, one time for  $\pm X$ ,  $\pm Y$ ,  $\pm Z$ .

(3) 5 - 500 Hz, random vibration, 30min for X, Y, Z.

(4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

**Samsung Secret**

## 1.2 ELECTRICAL ABSOLUTE RATINGS

## (1) TFT LCD MODULE

 $V_{DD} = 3.3V, V_{SS} = GND = 0V$ 

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	$V_{DD}$	$V_{DD} - 0.3$	$V_{DD} + 0.3$	V	(1)
Logic Input Voltage	$V_{DD}$	$V_{DD} - 0.3$	$V_{DD} + 0.3$	V	(1)

Note (1) Within  $T_a$  ( $25 \pm 2$  °C )[www.jxlcd.com](http://www.jxlcd.com)

Samsung Secret

## 2. OPTICAL CHARACTERISTICS


The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5).  
Measuring equipment : TOPCON SR-3

\* Ta = 25 ± 2 °C, V<sub>DD</sub>=3.3V, fv= 60Hz, fdCLK=76.3 MHz, IL = 25mA

Item	Symbol	Condition	Min.	Typ.	Max	Unit	Note	
Contrast Ratio (5 Points)	CR		500	-	-	-	(1), (2), (5)	
Response Time at Ta ( Rising + Falling )	T <sub>RT</sub>		-	16	25	msec	(1), (3)	
Average Luminance of White (5 Points)	Y <sub>L,AVE</sub>		170	200	-	cd/m <sup>2</sup>	I <sub>L</sub> = 25mA (1), (4)	
Color Chromaticity ( CIE )	Red	R <sub>X</sub>	Normal Viewing Angle φ = 0 θ = 0	0.615	TYP -0.03	TYP +0.03	-	(1), (5) SR-3
		R <sub>Y</sub>		0.340				
	Green	G <sub>X</sub>		0.330				
		G <sub>Y</sub>		0.560				
	Blue	B <sub>X</sub>		0.160				
		B <sub>Y</sub>		0.135				
	White	W <sub>X</sub>		0.313				
		W <sub>Y</sub>		0.329				
Viewing Angle	Hor.	θ <sub>L</sub>	CR ≥ 10 At center	30	45	-	Degrees	(1), (5) SR-3
		θ <sub>R</sub>		30	45	-		
	Ver.	φ <sub>H</sub>		10	15	-		
		φ <sub>L</sub>		20	35	-		
13 Points White Variation	δ <sub>L</sub>		-	-	1.6	-	(6)	

**Samsung Secret**

Note 1) Definition of Viewing Angle : Viewing angle range( $10 \leq C/R$ )

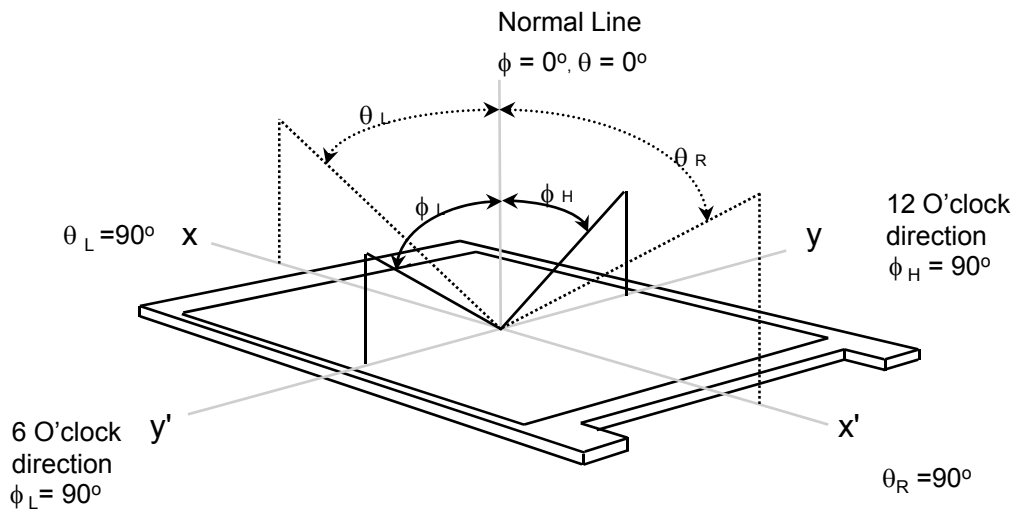


Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax) ,gray min (Gmin) at 5 points (33, 55, 77, 37, 73)

$$CR = \frac{CR(33) + CR(55) + CR(77) + CR(37) + CR(73)}{5}$$

Points : 33, 55, 77, 37, 73 at the figure of Note (6).


Note 3) Definition of Response time :

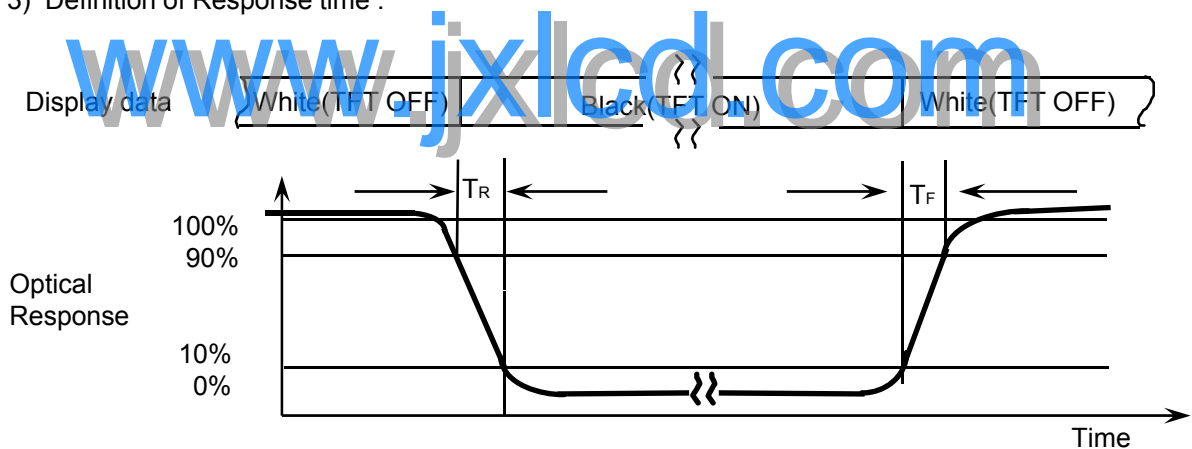

Note 4) Definition of Average Luminance of White : measure the luminance of white at 5 points.

Average Luminance of White ( $Y_{L,AVE}$ )

$$Y_{L,AVE} = \frac{Y_{L33} + Y_{L55} + Y_{L77} + Y_{L37} + Y_{L73}}{5}$$

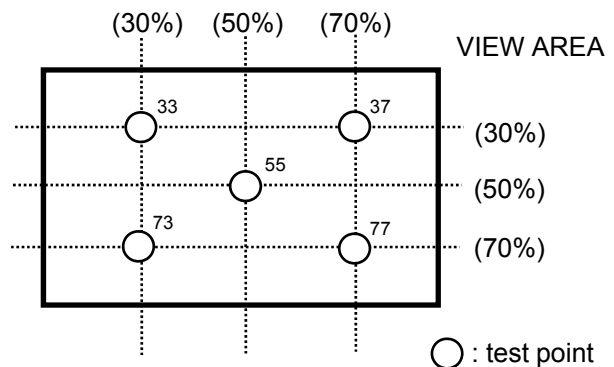


Samsung Secret

Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. 30 min after lighting the backlight. This should be measured in the center of screen.

LED current : 25.0mA


Environment condition :  $T_a = 25 \pm 2 \text{ }^\circ\text{C}$

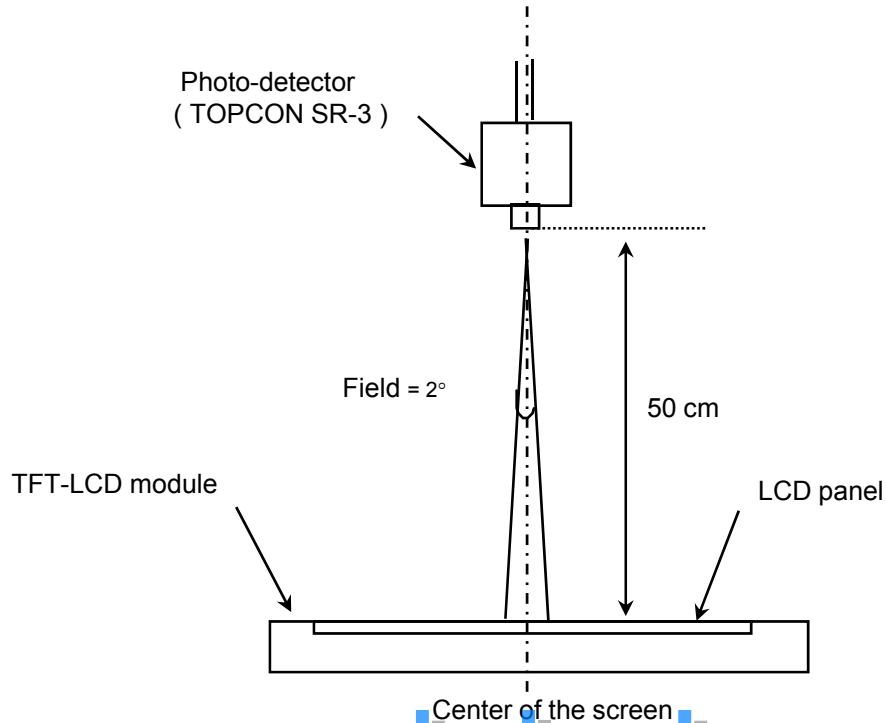

[www.jxlcd.com](http://www.jxlcd.com) [ Optical characteristics measurement setup ]

Note 6) Definition of 13 points white variation ( $\delta L$ ), [ ① ~ ⑬ ]

$$\delta L = \frac{\text{Maximum luminance of 13 points}}{\text{Minimum luminance of 13 points}}$$

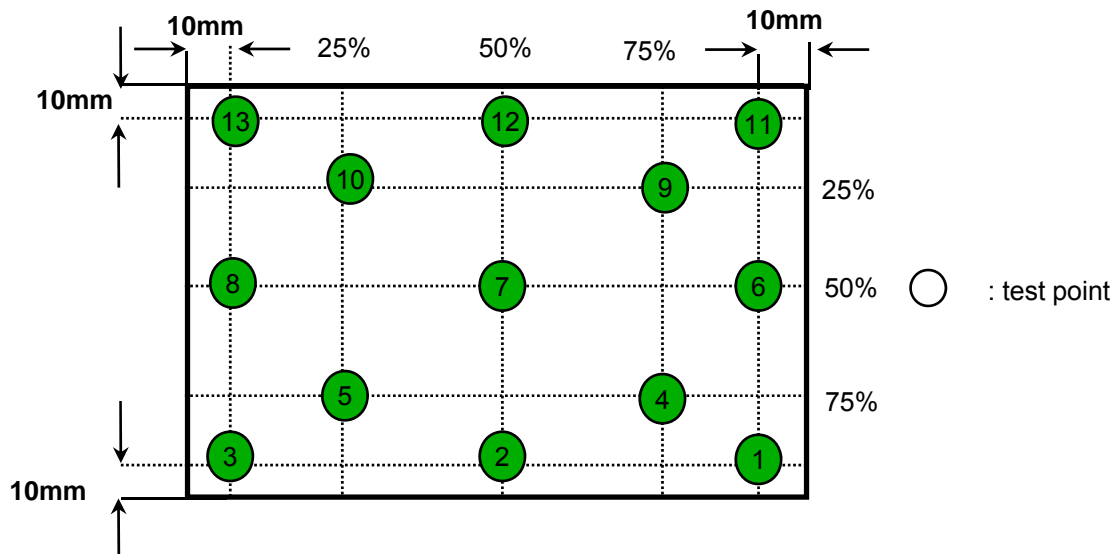

Samsung Secret



### 3. ELECTRICAL CHARACTERISTICS

#### 3.1 TFT LCD MODULE

 $T_a = 25 \pm 2^\circ\text{C}$ 


Item	Symbol	Min.	Typ.	Max.	Unit	Note	
Voltage of Power Supply	Vcc	3.0	3.3	3.6	V		
Differential Input Voltage for LVDS Receiver Threshold	High	$V_{IH}$	-	-	+100	mV	$V_{CM} = +1.2V$
	Low	$V_{IL}$	-100	-	-	mV	
Vsync Frequency	$f_v$	-	60	-	Hz		
Hsync Frequency	$f_H$	-	47.5	-	KHz		
Main Frequency	$f_{DCLK}$		76.3		MHz		
Rush Current	$I_{RUSH}$	-	-	1.5	A	(4)	
Current of Power Supply	White	$I_{DD}$	-	240	-	mA	(2),(3)*a
	Mosaic		-	240	264	mA	(2),(3)*b

Note (1) Display data pins and timing signal pins should be connected.( GND = 0V )


(2)  $f_v = 60\text{Hz}$ ,  $f_{DCLK} = 76.3\text{MHz}$ ,  $V_{DD} = 3.3V$ , DC Current

(3) Power dissipation pattern

\*a) White Pattern

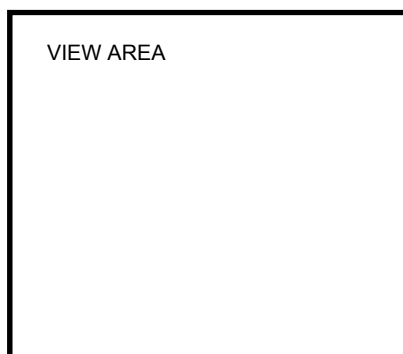


\*b) Mosaic Pattern

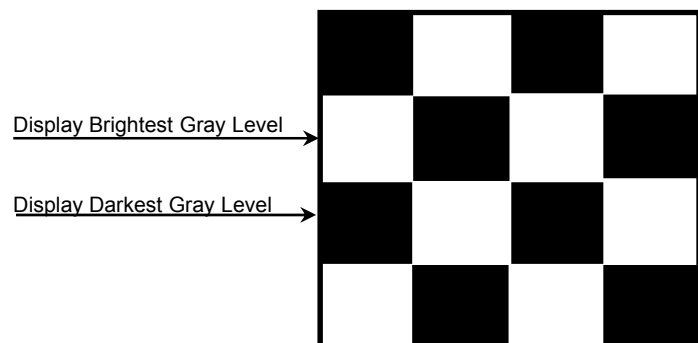


**Samsung Secret**

4) Rush current measurement condition

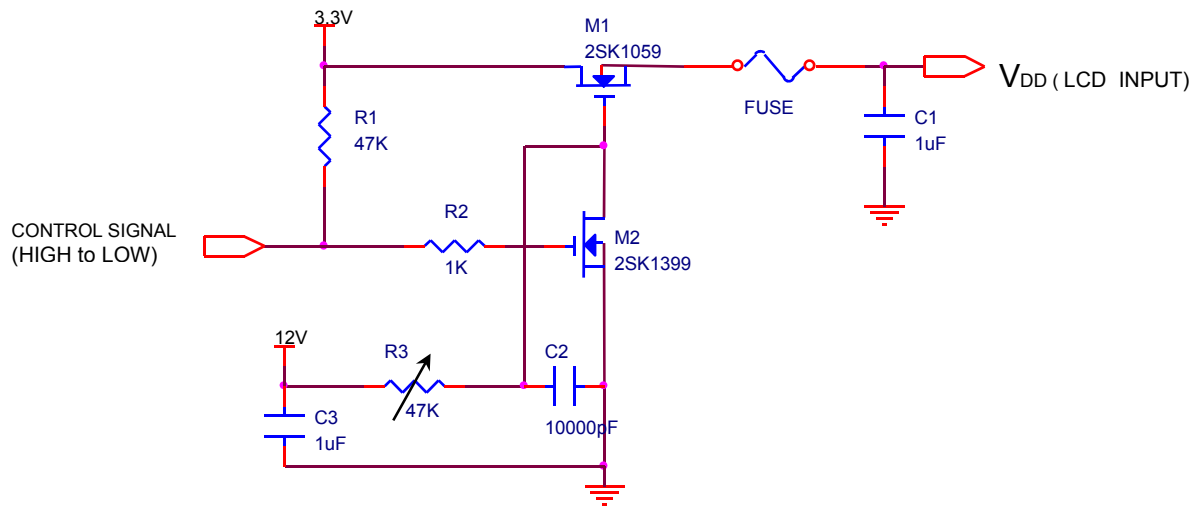

V<sub>DD</sub> rising time is 470us

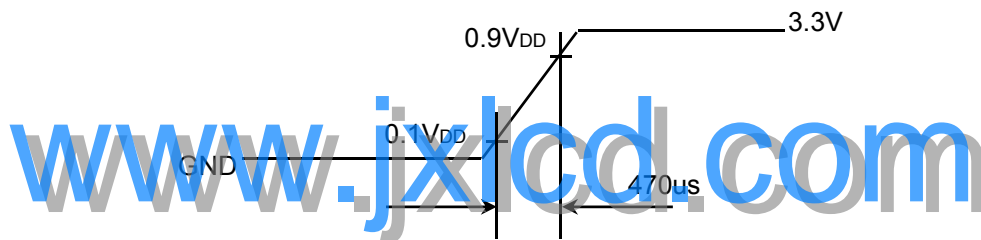

Samsung Secret

## 3.2 BACK-LIGHT UNIT

Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED Forward Current	IF	-	27	-	mA	
LED Forward Voltage	VF	-	3.2	3.4	V	
LED Array Voltage	VP	-	28.8	-	V	VF X 9 LEDs
Power Consumption	P	-	3.7	4	W	IF X VF X 36 LEDs
Operating Life Time	Hr	12,000	-	-	Hour	(1)

Note (1) Life time (Hr) of LEDs can be defined as the time in which it continues to operate under the condition Ta= 25 ± 2 °C and IF = 25 mA until one of the following event occurs.

1. When the brightness becomes 50% or lower than the original.

## 3.3 LED Driver

- On board LED Driver (Manufacturer : Richtek)


Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Input Voltage	V <sub>in</sub>	6	12	20	V	
PWM Duty	D	10	-	100	%	PWM frequency (1~10kHz)
PWM Frequency	F <sub> PWM</sub>	0.12	-	20	KHz	

Samsung Secret

## 4. BLOCK DIAGRAM

### 4.1 TFT LCD Module

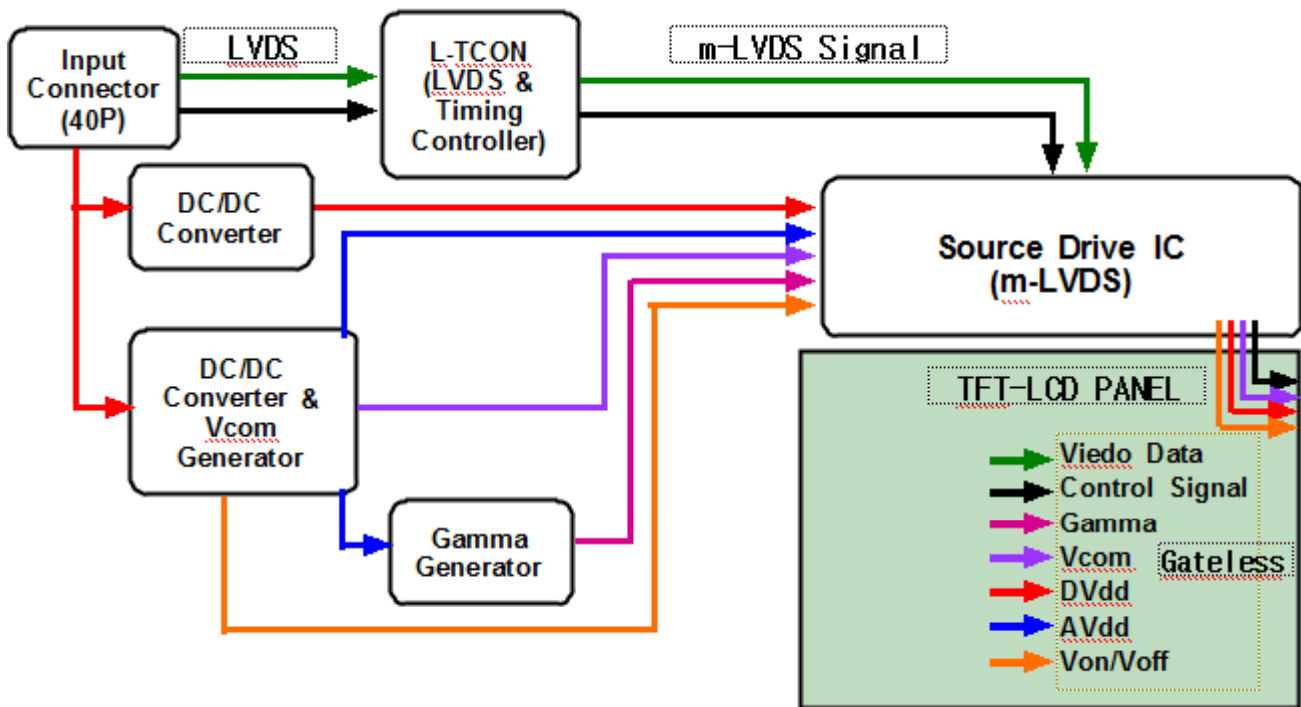

[www.jxlcd.com](http://www.jxlcd.com)

Samsung Secret

## 5. INPUT TERMINAL PIN ASSIGNMENT


### 5.1. Input Signal & Power (LVDS, Connector : I-PEX 20455-040E-12)

No.	Signal	Full Description
1	NU	NOT USED
2	VDD	Power (Vdd = 3.3V)
3	VDD	Power (Vdd = 3.3V)
4	VCC EDID	VCC_EDID
5	WPN	WPN
6	SCL	DATA FOR CLOCK
7	SDA	DATA FOR EDID
8	O_RXIN0-	LVDS 0th Signal Negative(Odd)
9	O_RXIN0+	LVDS 0th Signal Positive(Odd)
10	GND	Ground
11	O_RXIN1-	LVDS 1st Signal Negative(Odd)
12	O_RXIN1+	LVDS 1st Signal Positive(Odd)
13	GND	Ground
14	O_RXIN2-	LVDS 2nd Signal Negative(Odd)
15	O_RXIN2+	LVDS 2nd Signal Positive(Odd)
16	GND	Ground
17	O_RXCLKIN-	LVDS Clock Signal Negative(Odd)
18	O_RXCLKIN+	LVDS Clock Signal Positive(Odd)
19	GND	Ground
20	NC	NOT CONNECT
21	NC	NOT CONNECT
22	GND	Ground
23	NC	NOT CONNECT
24	NC	NOT CONNECT
25	GND	Ground
26	NC	NOT CONNECT
27	NC	NOT CONNECT
28	GND	Ground
29	NC	NOT CONNECT
30	NC	NOT CONNECT
31	GND	Ground
32	GND	Ground
33	GND	Ground
34	NU	NOT USED
35	PWM	PWM
36	BL EN	BL ENABLE
37	NC	NOT CONNECT
38	VBL	B/L VCC
39	VBL	B/L VCC
40	VBL	B/L VCC

**Samsung Secret**

5.2 LVDS Interface : Transmitter DS90CF363 or Compatible

Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
51	TxIN0	R0	14	TxIN14	G5
52	TxIN1	R1	15	TxIN15	B0
54	TxIN2	R2	19	TxIN18	B1
55	TxIN3	R3	20	TxIN19	B2
56	TxIN4	R4	22	TxIN20	B3
3	TxIN6	R5	23	TxIN21	B4
4	TxIN7	G0	24	TxIN22	B5
6	TxIN8	G1	27	TxIN24	Hsync
7	TxIN9	G2	28	TxIN25	Vsync
11	TxIN12	G3	30	TxIN26	DE
12	TxIN13	G4	31	TxCLKIN	Clock

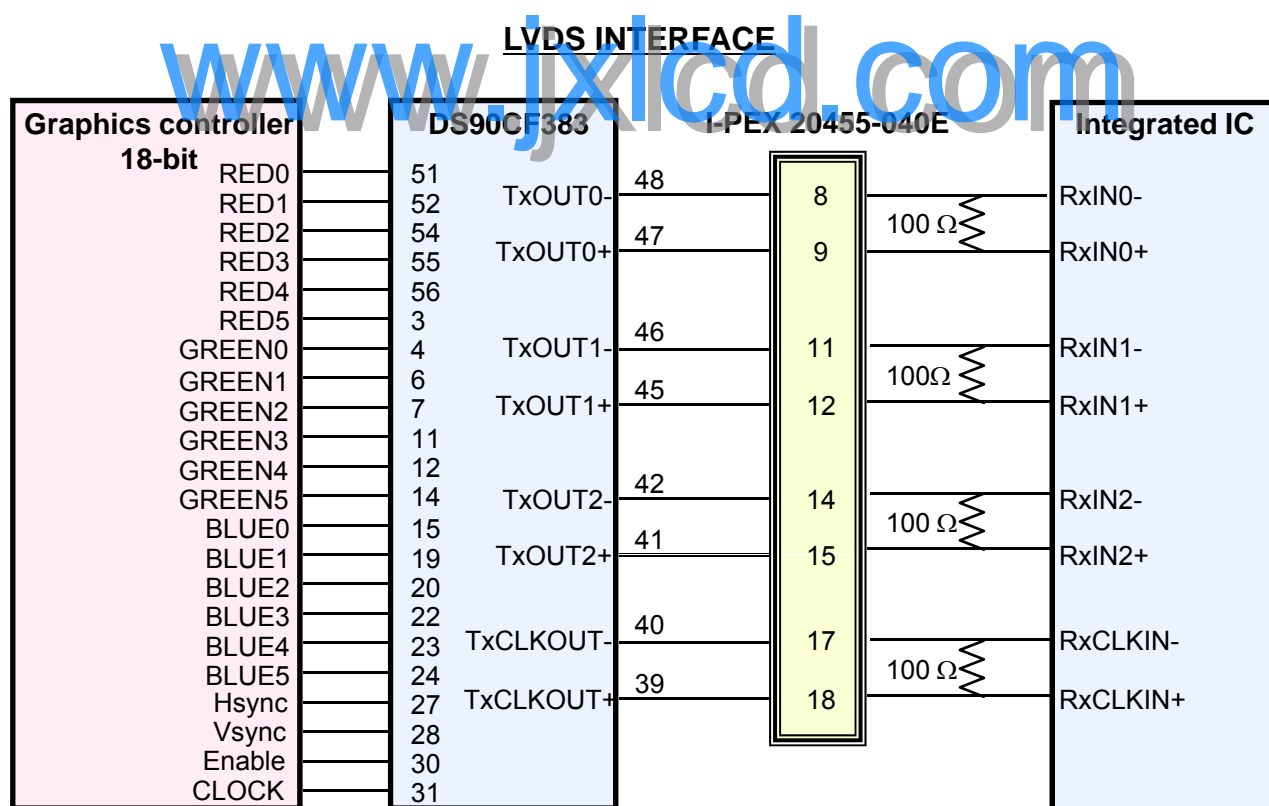


Note : The LCD Module uses a 100ohm resistor between positive and negative lines of each receiver input.

**Samsung Secret**

### 5.3 Timing Diagrams of LVDS For Transmission

#### LVDS Receiver : Integrated T-CON

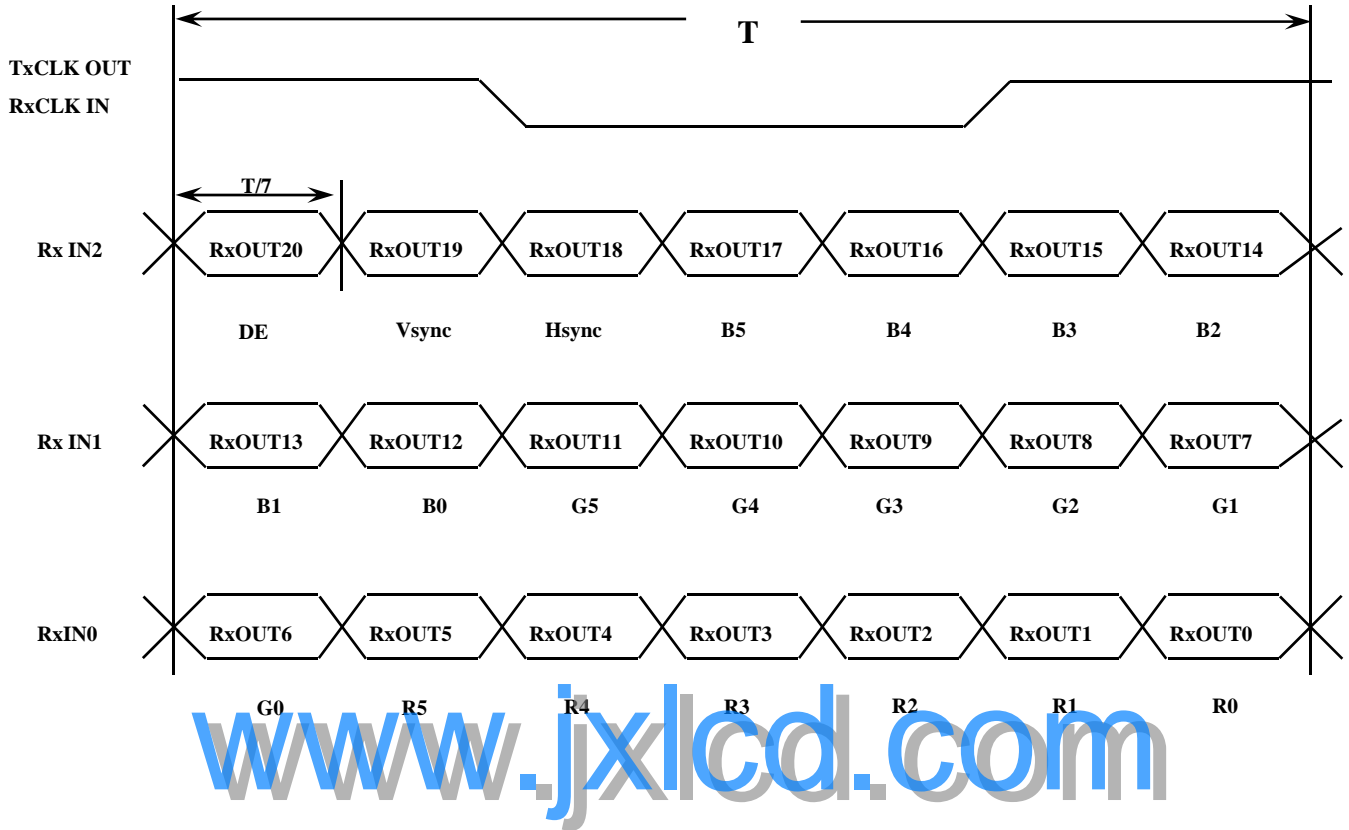

Samsung Secret

5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color

Color	Display	Data Signal																	Gray Scale Level
		Red					Green					Blue							
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	-
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	-
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	-
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	-
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	-
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	-
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
Gray Scale Of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	Dark	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
	↑	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	R61
	Light	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	R62
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	R63
Gray Scale Of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	Dark	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	G1
	↑	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	G2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	G61
	Light	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	G62
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	G63
Gray Scale Of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	Dark	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	B1
	↑	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	B2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	B61
	Light	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	B62
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	B63

Note 1) Definition of gray :


Rn: Red gray, Gn: Green gray, Bn: Blue gray (n=gray level)

Note 2) Input signal: 0 =Low level voltage, 1=High level voltage

**Samsung Secret**



### 5.5 Pixel Format in the display

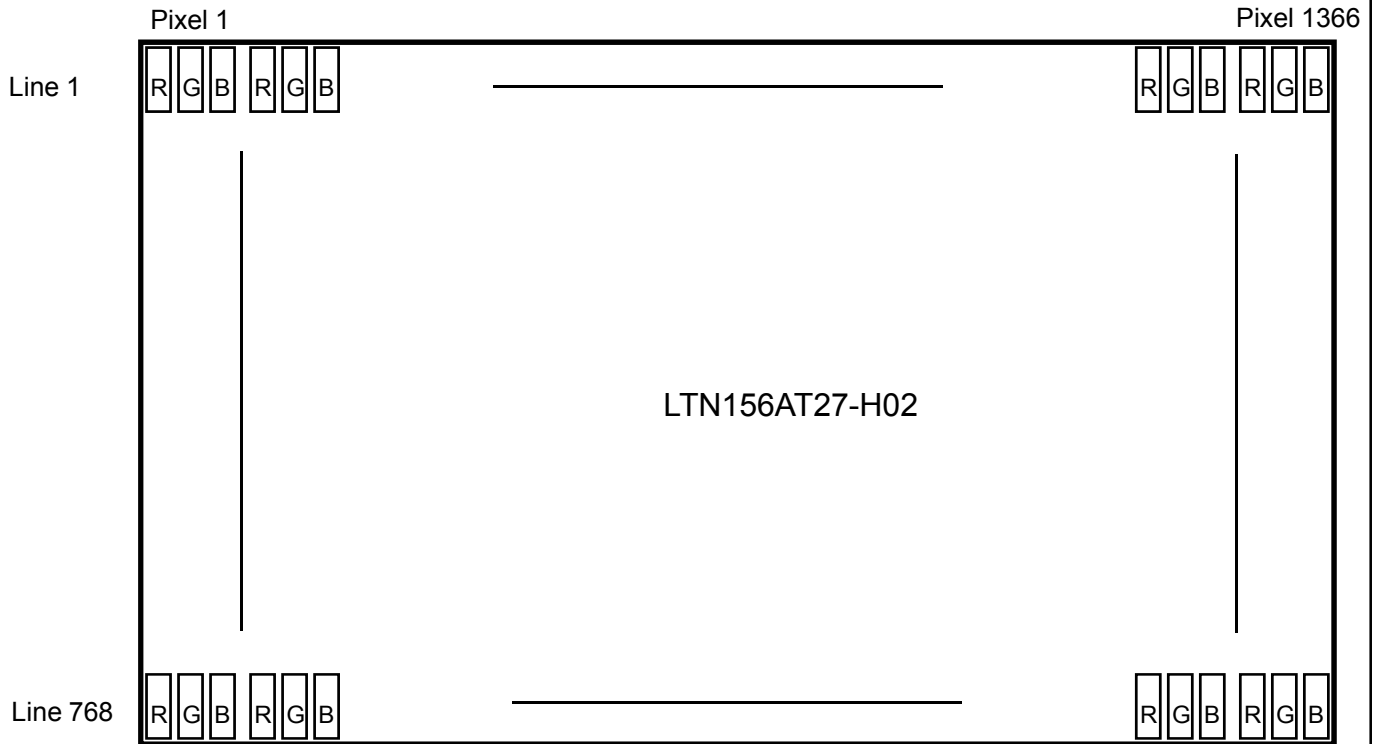

[www.jxlcd.com](http://www.jxlcd.com)


**Samsung Secret**

## 6. INTERFACE TIMING

### 6.1 Timing Parameters

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frame Frequency	Cycle	TV	784	792	799	Lines	-
Vertical Active Display Term	Display Period	TVD	-	768	-	Lines	-
One Line Scanning Time	Cycle	TH	1589	1606	1622	Clocks	-
Horizontal Active Display Term	Display Period	THD	-	1366	-	pixels	-


### 6.2 Timing diagrams of interface signal

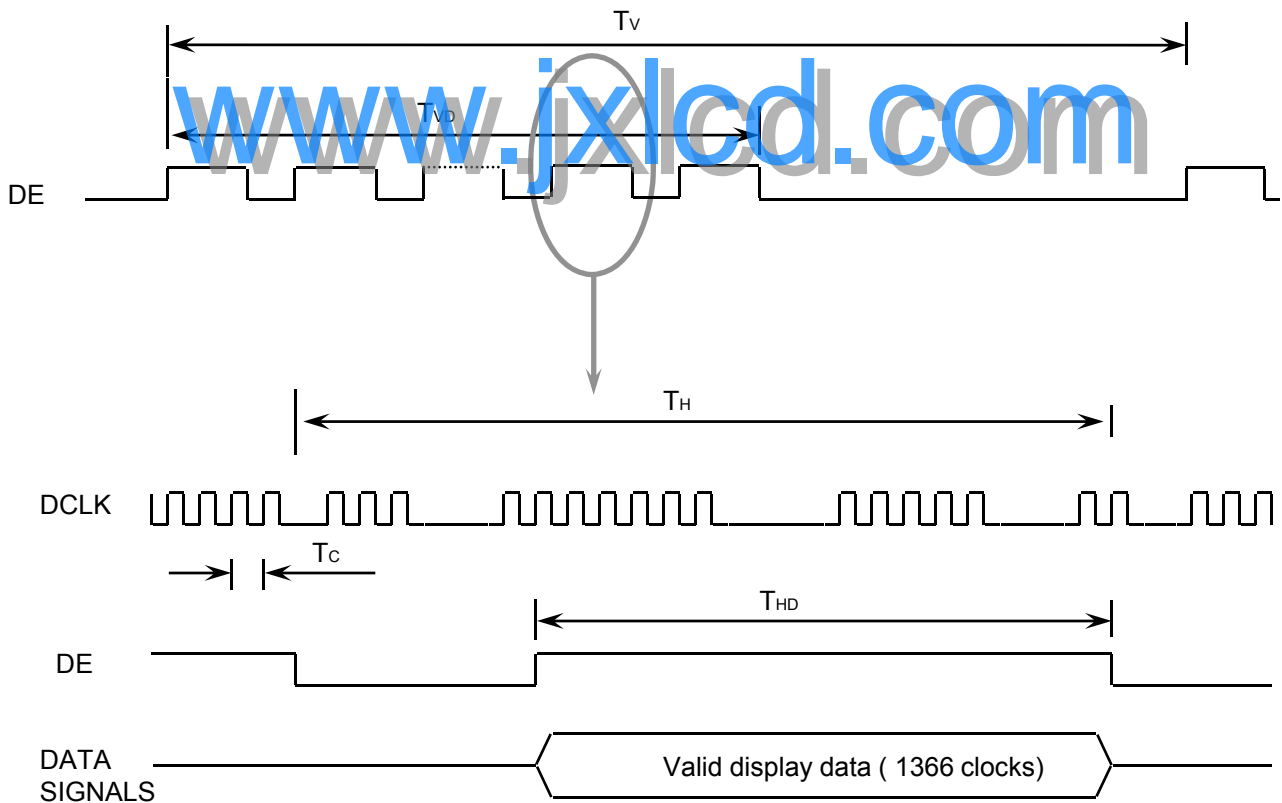

**Samsung Secret**

### 6.3 Power ON/OFF Sequence

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

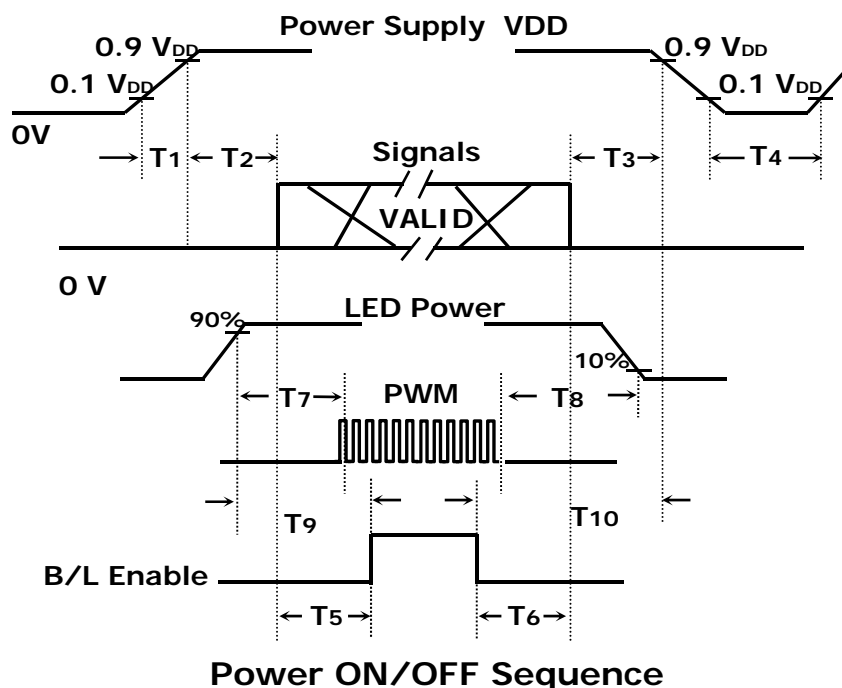

Timing (ms)	Remarks
$0.5 < T_1 \leq 10$	V <sub>DD</sub> rising time from 10% to 90%
$0 < T_2 \leq 50$	Delay from V <sub>DD</sub> to valid data at power ON
$0 < T_3$	Delay from valid data OFF to V <sub>DD</sub> off at power OFF
$150 \leq T_4$	V <sub>DD</sub> OFF time for Windows restart
$200 \leq T_5$	Delay from valid data to B/L enable at power ON
$200 \leq T_6$	Delay from valid data off to B/L disable at power OFF
$0 < T_7$	Delay from LED driver power ON to PWM ON
$0 < T_8$	Delay from PWM OFF to LED driver power OFF
$0 < T_9$	Delay from VBL on to B/L Enable ON
$0 < T_{10}$	Delay from B/L Enable Off to VBL OFF

**NOTE.**

- (1) The supply voltage of the external system for the module input should be the same as the definition of V<sub>DD</sub>.
- (2) In case of V<sub>DD</sub> = off level, please keep the level of input signals on the low or keep a high impedance.
- (3) T4 should be measured after the module has been fully discharged between power off and on period.
- (4) Interface signal shall not be kept at high impedance when the power is on.

**Samsung Secret**


## 7. Mechanical Outline Dimension

Refer to the next page


[www.jxlcd.com](http://www.jxlcd.com)

**Samsung Secret**


<b>Doc.No.</b>	LTN156AT27-H02	<b>Rev.No</b>	04-PI-G-120329	<b>Page</b>	20 / 24
----------------	----------------	---------------	----------------	-------------	---------

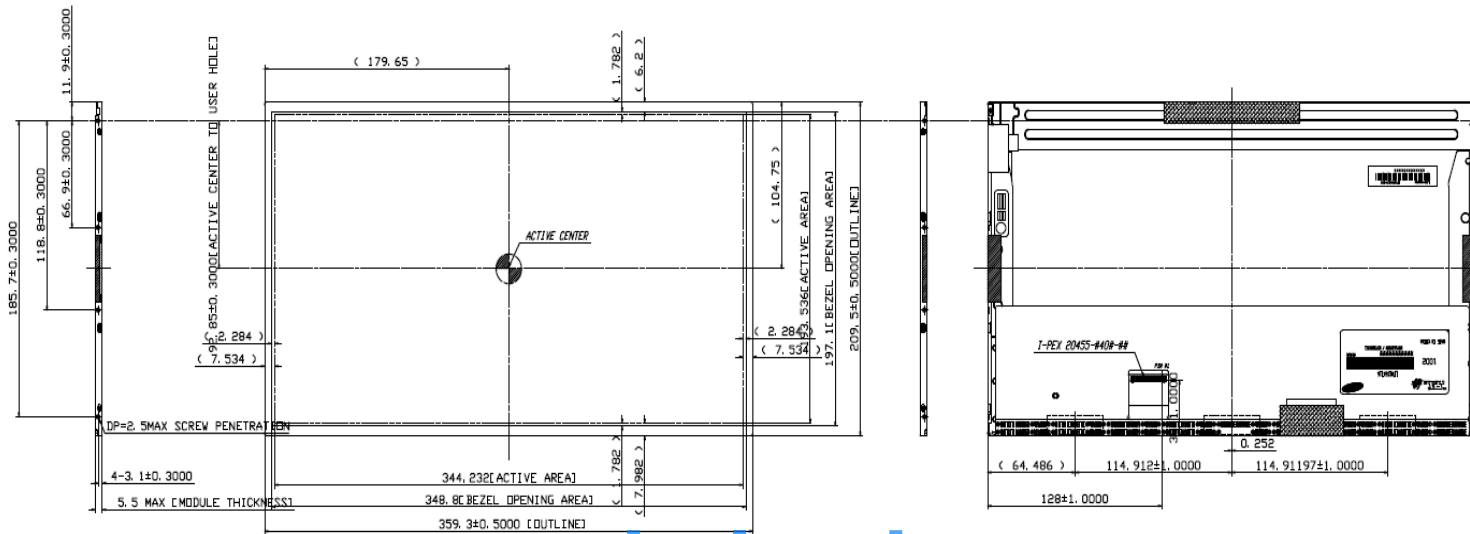

[www.jxlcd.com](http://www.jxlcd.com)



(USER HOLE SCREW HOLE DEPTH)



- \* NOTE
- SIGNAL INTERFACE CONNECTOR TO BE SPECIFIED AS BELOW.
    - MAKER: I-PEX (Not accept compatible connector basically)
    - INPUT CONNECTOR: I-PEX 20455-040E-12
  - LED CONNECTOR FOR BACKLIGHT TO BE SPECIFIED AS BELOW.
    - MAKER: UJI Electronics
    - PART NO: 51441-1041
  - CALIFERS MEASURING FORCE:  $750 \pm 250$  gfc
  - MAXIMUM SCREW TORQUE: MAX 2.5 Kgf-cm
  - WEIGHT: 450 g MAX
  - IN ORDER TO AVOID IC DAMAGE, IT IS NOT ALLOW THAT OVERLAPPING OF CABLES OR ANTENNAS, CAMERA, WLAN, WWAN, OVER THESE COF LOCATIONS.

## 8. GENERAL PRECAUTIONS

### 1. Handling

- (a) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist and bend the modules.
- (b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module.
- (c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (f) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (h) Protect the module from static , it may cause damage to the C-MOS Gate Array IC.
- (i) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (j) Do not disassemble the module.
- (k) Do not pull or fold the LED FPC.
- (l) Do not touch any component which is located on the back side.
- (m) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (n) Pins of I/F connector shall not be touched directly with bare hands.

**Samsung Secret**

## 2. STORAGE

We highly recommend to comply with the criteria in the table below.

ITEM	Unit	Min.	Max.
Temperature	( $^{\circ}$ C)	5	40
Storage Humidity	(%rH)	35	75
Storage life	12 months		
Storage Condition	<ul style="list-style-type: none"> <li>- The storage room should provide good ventilation and temperature control.</li> <li>- Products should not be placed on the floor, but on the Pallet away from a wall.</li> <li>- Prevent products from direct sunlight, moisture nor water; Be cautious of a build up of condensation.</li> <li>- Avoid other hazardous environment while storing goods.</li> <li>- If products delivered or kept in conditions of over the storage period of 3 months, the recommended temperature or humidity range, we recommend you leave them at a temperature of 20<math>^{\circ}</math>C and a humidity of 50% for 24 hours.</li> </ul>		

- (a) Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 5 to 40  $^{\circ}$ C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD module in direct sunlight.
- (c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.
- (d) Storage period is recommended not to exceed 1 year.

**Samsung Secret**

### 3. OPERATION

- (a) Do not connect, disconnect the module in the “ Power On” condition.
- (b) Power supply should always be turned on/off by following item 6.3 “ Power on/off sequence “.
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.
- (e) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.

### 4. OTHERS

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. ( the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, so on)  
Otherwise the module may be damaged.
- (d) If the module displays the same pattern continuously for a long period of time, It can be the situation when the image “sticks” to the screen.
- (e) This module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed

**Samsung Secret**

<b>Doc.No.</b>	LTN156AT27-H02	<b>Rev.No</b>	04-PI-G-120329	<b>Page</b>	24 / 24
----------------	----------------	---------------	----------------	-------------	---------