



TO :
DATE : .

SAMSUNG TFT-LCD

MODEL NO. : LTN184KT02

NOTE : Extension code [-T01]
→ LTN184KT02-T01
Surface type [**Glare**]

The information described in this SPEC is preliminary and can be changed without prior notice

APPROVED BY :

K. H. Shin

PREPARED BY : **LCD Mobile Development group 1**

SAMSUNG ELECTRONICS CO., LTD.



Samsung Secret

CONTENTS

Revision History	----- (3)
General Description	----- (4)
1. Absolute Maximum Ratings	----- (5)
1.1 Absolute Ratings of environment	
1.2 Electrical Absolute Ratings	
2. Optical Characteristics	----- (7)
3. Electrical Characteristics	----- (10)
3.1 TFT LCD Module	
3.2 Backlight Unit	
4. Block Diagram	----- (13)
4.1 TFT LCD Module	
4.2 Backlight Unit	
5. Input Terminal Pin Assignment	----- (14)
5.1 Input Signal & Power	
5.2 LVDS Interface	
5.3 Backlight Unit	
5.4 Timing Diagrams of LVDS For Transmitting	
5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color.	
5.6 Pixel format	
5.7 DVR Address	
6. Interface Timing	----- (20)
6.1 Timing Parameters	
6.2 Timing Diagrams of interface Signal	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	----- (22)
8. Packing	----- (24)
9. Marking & Others	----- (25)
10. General Precaution	----- (27)
11. EDID	----- (29)

REVISION HISTORY

Approval

Date	Revision No.	Page	Summary
Apr. 15. 2009	A00	All	- LTN184KT02-T01 model's approval spec was issued first.

Samsung Secret

GENERAL DESCRIPTION

DESCRIPTION

LTN184KT02-T01 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as switching devices. This model is composed of a TFT LCD panel, a driver circuit and a backlight unit. The resolution of a 18.4" contains 1680X945 pixels and can display up to 262,144 colors. 6 O'clock direction is the optimum viewing angle.

FEATURES

- High contrast ratio, high aperture structure
- 1680 X 945 pixels resolution (16:9)
- Color Gamut (Typical 45%)
- Low power consumption
- Single CCFL
- DE(Data enable) only mode
- 3.3V LVDS Interface
- Onboard EEDID chip
- RoHS Compliance

APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC

GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	408.24(H) x 229.635(V) (18.4" diagonal)	mm	
Driver element	a-Si TFT active matrix		
Display colors	262,144		
Number of pixel	1680 X 945	pixel	16 : 9
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.243(H) x 0.243(V) (TYP.)	mm	
Display Mode	Normally white		
Surface treatment	Haze 0, Hardness 3H		

Samsung Secret

Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	-	422.5	422.8	mm	(1)
	Vertical (V)	-	246.0	246.3	mm	
	Depth (D)	-	6.1	6.5	mm	
Weight		-	765	785	g	

Note (1) Measurement condition of outline dimension

. Equipment : Vernier Calipers

. Push Force : 500g · f (minimum)

1. ABSOLUTE MAXIMUM RATINGS


1.1 ENVIRONMENTAL ABSOLUTE RATINGS

Item	Symbol	Min.	Max.	Unit	Note
Storage temperate	TSTG	-20	60	°C	(1)
Operating temperate (Temperature of glass surface)	TOPR	0	50	°C	(1)
Shock (non-operating)	Snop	-	240	G	(2),(4)
Vibration (non-operating)	Vnop	-	2.41	G	(3),(4)

Note (1) Temperature and relative humidity range are shown in the figure below.

95 % RH Max. ($40^{\circ}\text{C} \geq T_a$)

Maximum wet - bulb temperature at 39°C or less. ($T_a > 40^{\circ}\text{C}$) No condensation

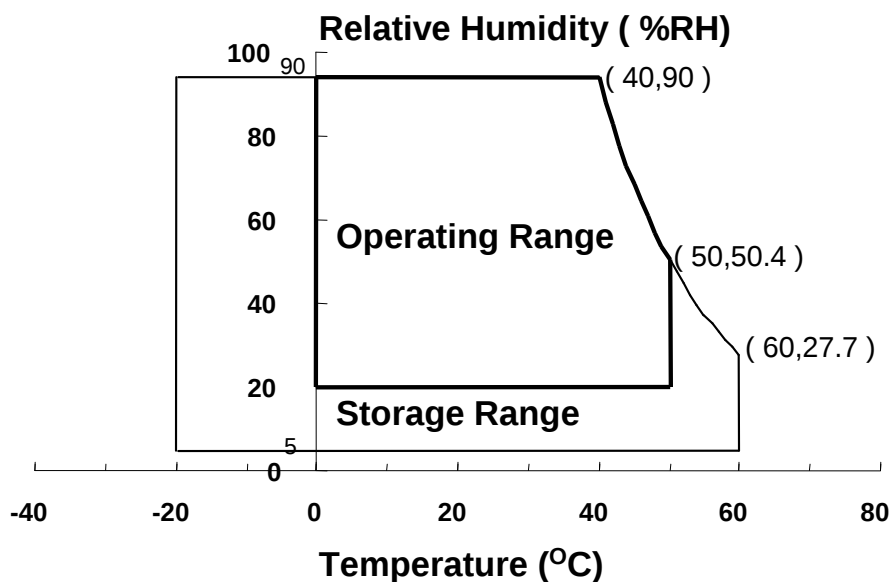

(2) 2ms, half sine wave, one time for $\pm X$, $\pm Y$, $\pm Z$.

(3) 5 - 500 Hz, random vibration, 30min for X, Y, Z.

(4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

Samsung Secret

1.2 ELECTRICAL ABSOLUTE RATINGS

(1) TFT LCD MODULE

 $V_{DD} = 3.3V, V_{SS} = GND = 0V$

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	$V_{DD} - 0.3$	$V_{DD} + 0.3$	V	(1)
Logic Input Voltage	V_{IN}	$V_{DD} - 0.3$	$V_{DD} + 0.3$	V	(1)

Note (1) Within T_a ($25 \pm 2^\circ C$)

(2) BACK-LIGHT UNIT

 $T_a = 25 \pm 2^\circ C$

Item	Symbol	Min.	Max.	Unit	Note
Lamp Current	I_L	2.0	6.5	mArms	(1)
Lamp frequency	F_L	40	80	kHz	(1)

Note 1) Permanent damage to the device may occur if maximum values are exceeded
Functional operation should be restricted to the conditions described under normal operating conditions.


2. OPTICAL CHARACTERISTICS

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5).
Measuring equipment : TOPCON SR-3

* Ta = 25 ± 2 °C, V_{DD}=3.3V, f_v= 60Hz, f_{DCLK} = 60.84MHz, IL = 6.0 mA

Item		Symbol	Condition	Min.	Typ.	Max	Unit	Note
Contrast Ratio (5 Points)		CR		-	600	-	-	(1), (2), (5)
Response Time at Ta (Rising + Falling)		T _{RT}		-	16	25	msec	(1), (3)
Average Luminance of White (5points)		Y _{L,AVE}		175	200	-	cd/m²	IL=6.0mA (1), (4)
Color Chromaticity (CIE)	Red	R _X	Normal Viewing Angle ϕ = 0 θ = 0	0.558	0.588	0.618	-	(1), (5) SR-3
		R _Y		0.310	0.340	0.370		
	Green	G _X		0.300	0.330	0.360		
		G _Y		0.507	0.537	0.567		
	Blue	B _X		0.121	0.151	0.181		
		B _Y		0.092	0.122	0.152		
	White	W _X		0.283	0.313	0.343		
		W _Y		0.299	0.329	0.359		
Viewing Angle	Hor.	θ _L	CR ≥ 10 At center	40	45	-	Degrees	(1), (5) SR-3
		θ _R		40	45	-		
	Ver.	ϕ _H		10	15	-		
		ϕ _L		25	35	-		
13 Points White Variation		δL		-	-	1.8	-	(6)

Note 1) Definition of Viewing Angle : Viewing angle range (5 or $10 \leq C/R$)

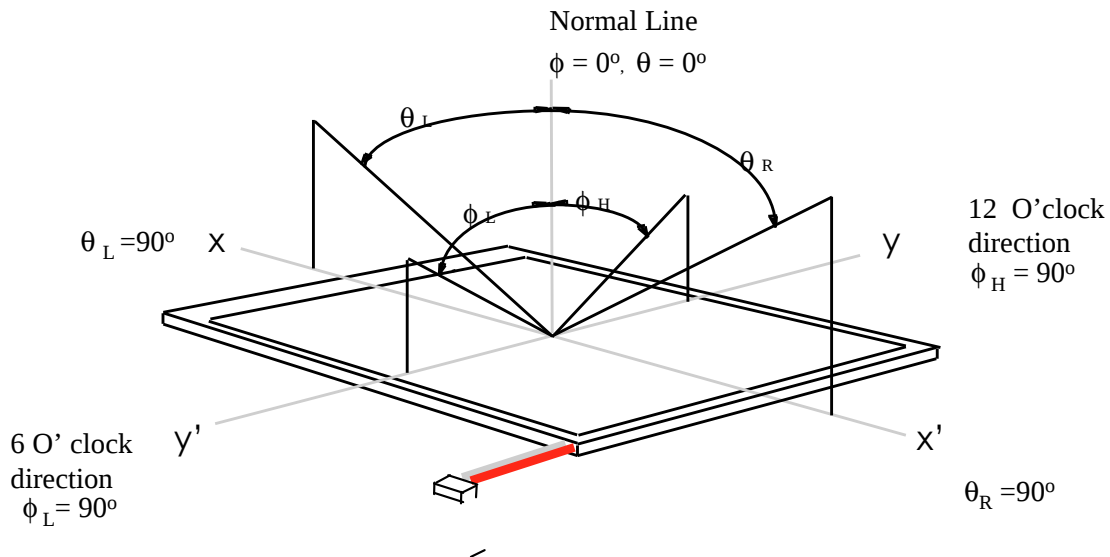


Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax) ,gray min (Gmin) at 5 points(4, 5, 7, 9, 10)


$$CR = \frac{CR(4) + CR(5) + CR(7) + CR(9) + CR(10)}{5}$$

Points : (4) , (5) , (7) , (9) , (10) at the figure of Note (6).


Note 3) Definition of Response time :

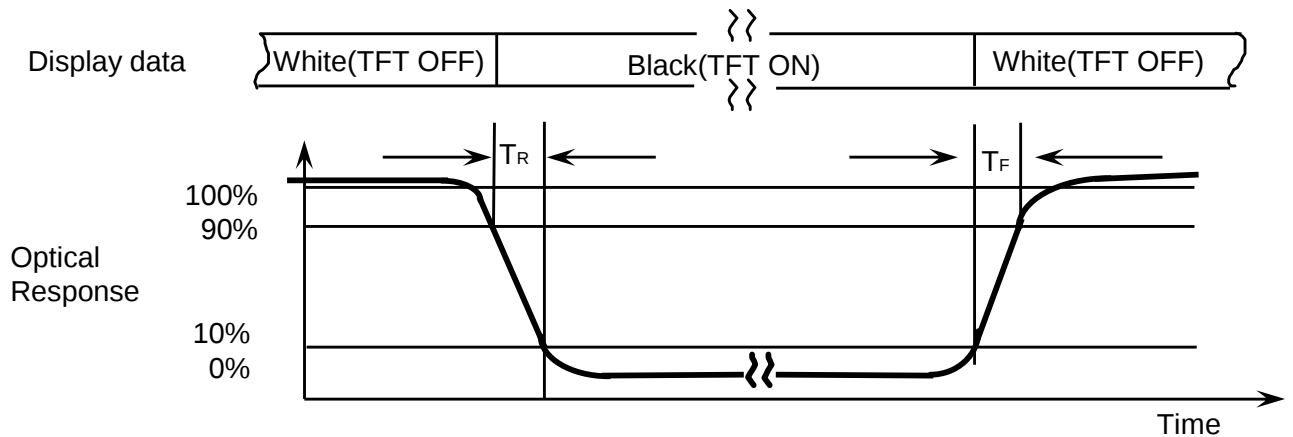

Note 4) Definition of Average Luminance of White : measure the luminance of white at 5 points.

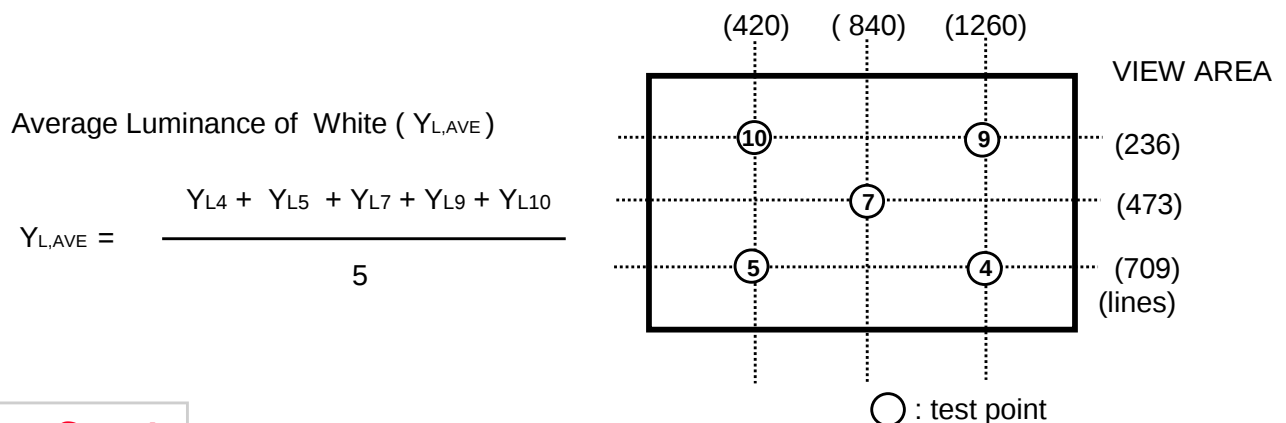


Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. 30 min after lighting the backlight. This should be measured in the center of screen.
Lamp current : 6.5mA (Inverter : SIC-130T)
Environment condition : $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$

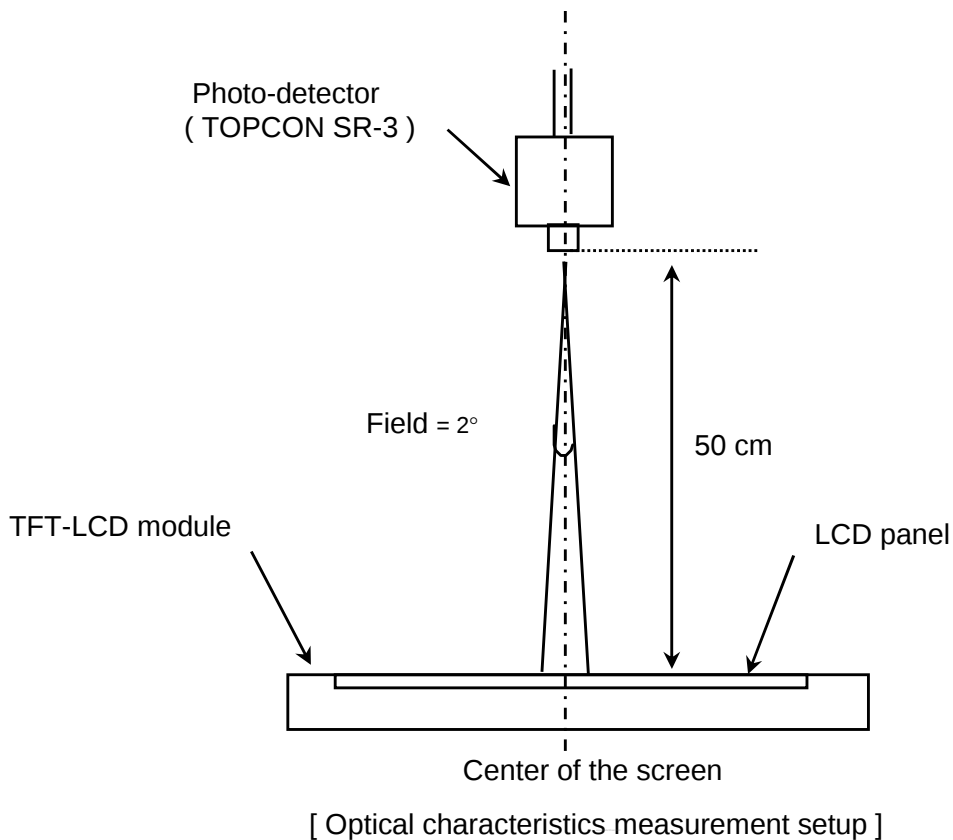

Note 6) Definition of 13 points white variation (δ_L), [① ~ ⑬]

$$\delta_L = \frac{\text{Maximum luminance of 13 points}}{\text{Minimum luminance of 13 points}}$$

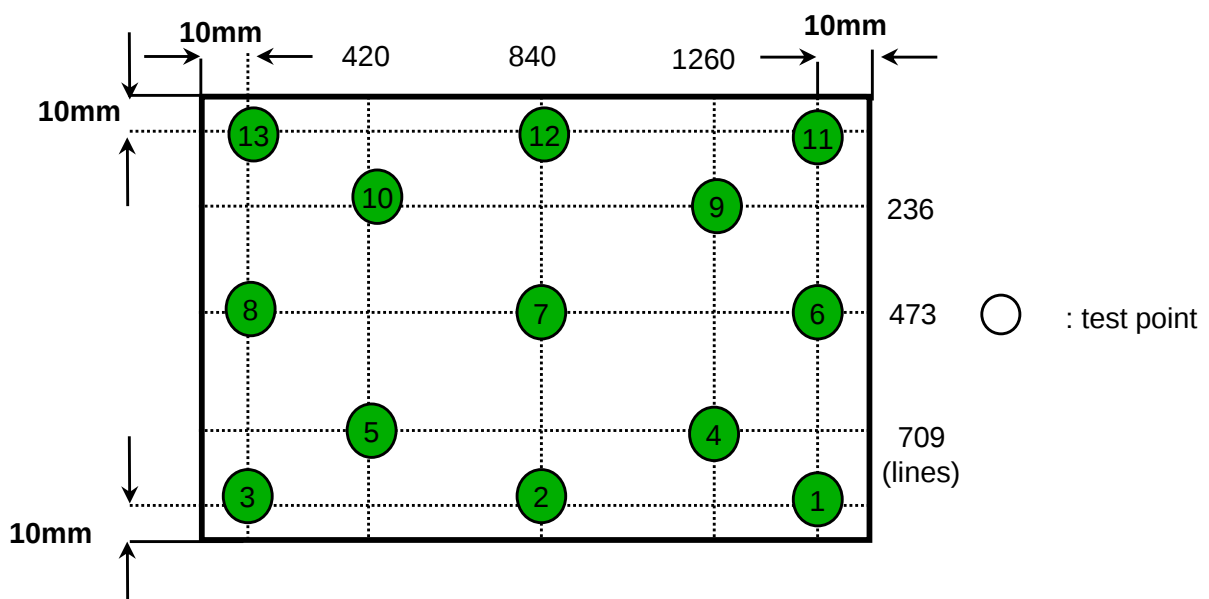

Samsung Secret

3. ELECTRICAL CHARACTERISTICS

Approval

3.1 TFT LCD MODULE

Ta= 25 ± 2°C


Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V _{DD}	3.0	3.3	3.6	V	
Differential Input Voltage for LVDS Receiver Threshold	High	V _{IH}	-	-	+100	mV	V _{CM} = +1.2V
	Low	V _{IL}	-100	-	-	mV	
Vsync Frequency		f _v	-	60	-	Hz	
Hsync Frequency		f _H	-	62.4	-	KHz	
Main Frequency		f _{DCLK}	58.84	60.84	62.06	MHz	2CH
Rush Current		I _{RUSH}	-	-	1.5	A	(4)
Current of Power Supply	White	I _{DD}	-	550	-	mA	(2),(3)*a
	Mosaic		-	710	-	mA	(2),(3)*b
	V. stripe		-	800	900	mA	(2),(3)*c

Note (1) Display data pins and timing signal pins should be connected.(GND = 0V)


(2) f_v = 60Hz, f_{DCLK} = 53.82 MHz, V_{DD} = 3.3V , DC Current.

(3) Power dissipation pattern

*a) White Pattern


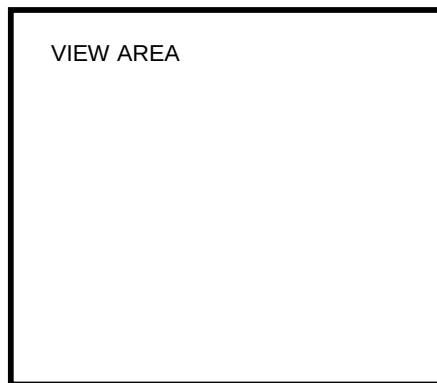


*b) Mosaic Pattern

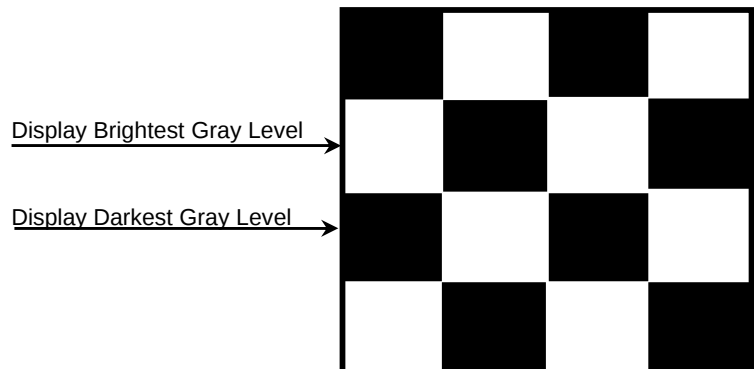


Samsung Secret


*c) 1dot Vertical stripe pattern

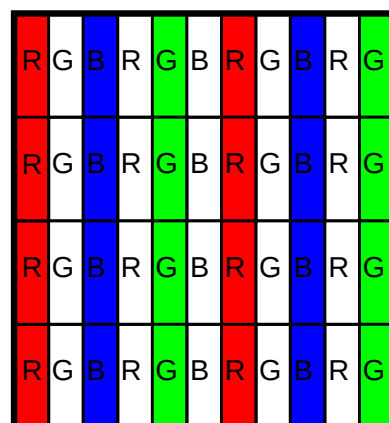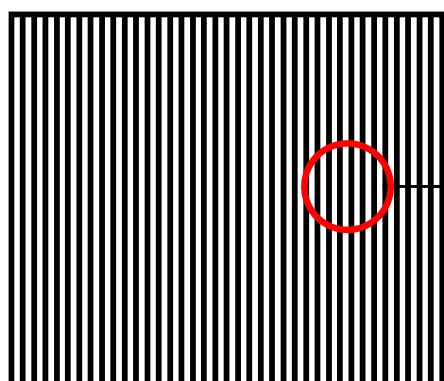

4) Rush current measurement condition

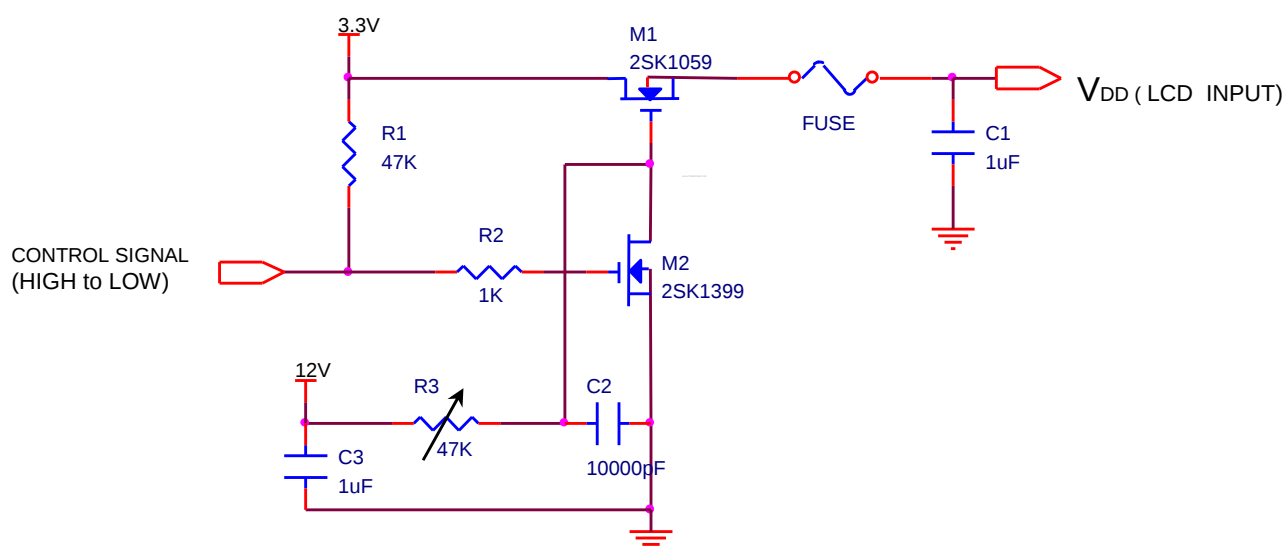

V_{DD} rising time is 470us

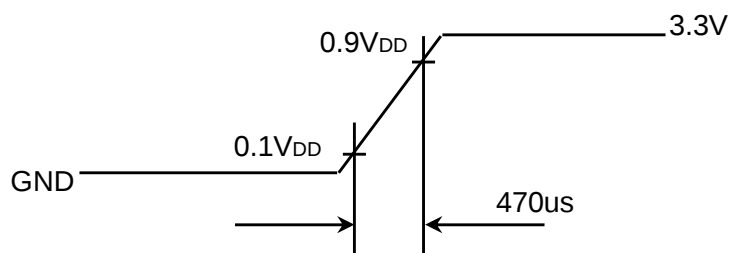

Samsung Secret

3.2 BACK-LIGHT UNIT

The backlight system is an edge-lighting type with single CCFL (Cold Cathode Fluorescent Lamp).
The characteristics of a single lamp are shown in the following tables.

- INVERTER : SIC130T


Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp Current	I _L	4.0	6.0	6.5	mArms	(1)
Lamp Voltage	V _L	-	720	-	Vrms	I _L = 6.0mA
Frequency	f _L	40	60	65	KHz	(2)
Power Consumption	P _L	-	4.32	-	W	(3) I _L = 6.0mA
Operating Life Time	Hr	10,000	-	-	Hour	(4)
Startup Voltage	V _s	-	-	1350	Vrms	25°C, (5)
	V _s	-	-	1670	Vrms	0°C, (5)
Lamp startup time		-	-	1.0	sec	(5)

Note) The waveform of the inverter output voltage must be area symmetric and the design of the inverter must have specifications for the modularized lamp.

The performance of the backlight, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. So all the parameters of an inverter should be carefully designed so as not to produce too much leakage current from high-voltage output of the inverter. When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter(miss lighting, flicker, etc.) never occur. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.

Note (1) Lamp current is measured with a high frequency current meter as shown below.

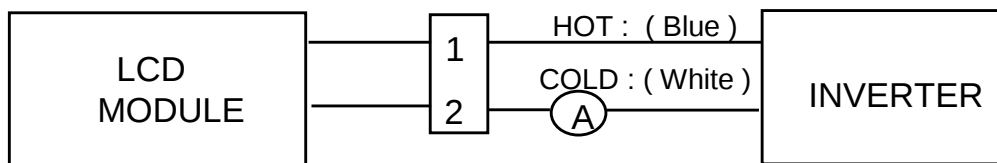

(2) Lamp frequency may produce interference with horizontal synchronous frequency and this may cause line flow on the display. Therefore lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

(3) Refer to I_L × V_L to calculate.

(4) Life time (Hr) of a lamp can be defined as the time in which it continues to operate under the condition Ta= 25 ± 2 °C and I_L = 6.5 mArms until one of the following event occurs.


1. When the brightness becomes 50% or lower than the original.
2. When the Effective ignition length becomes 80% or lower than the original value.
(Effective ignition length is defined as an area that has less than 70% brightness compared to the brightness in the center point.)

(5) The inverter open voltage - this voltage should be measured after ballast capacitor- have to be larger than the lamp startup voltage, otherwise backlight may has blinking for a moment after turns on or not be turned on.
If an inverter has shutdown function it should keep its open voltage for longer than 1 second even if lamp connector open.


Samsung Secret

4. BLOCK DIAGRAM

4.1 TFT LCD Module

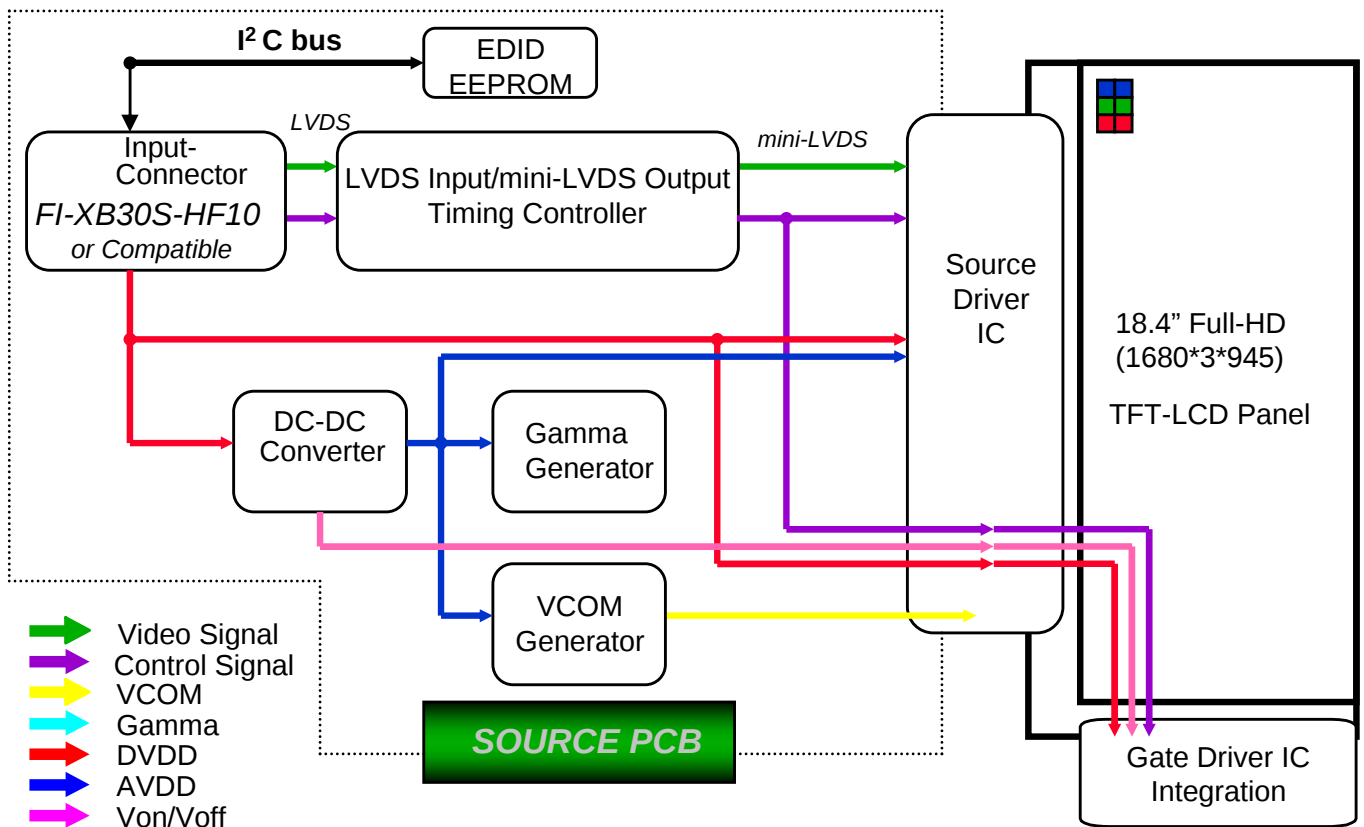

4.2 BACK-LIGHT UNIT

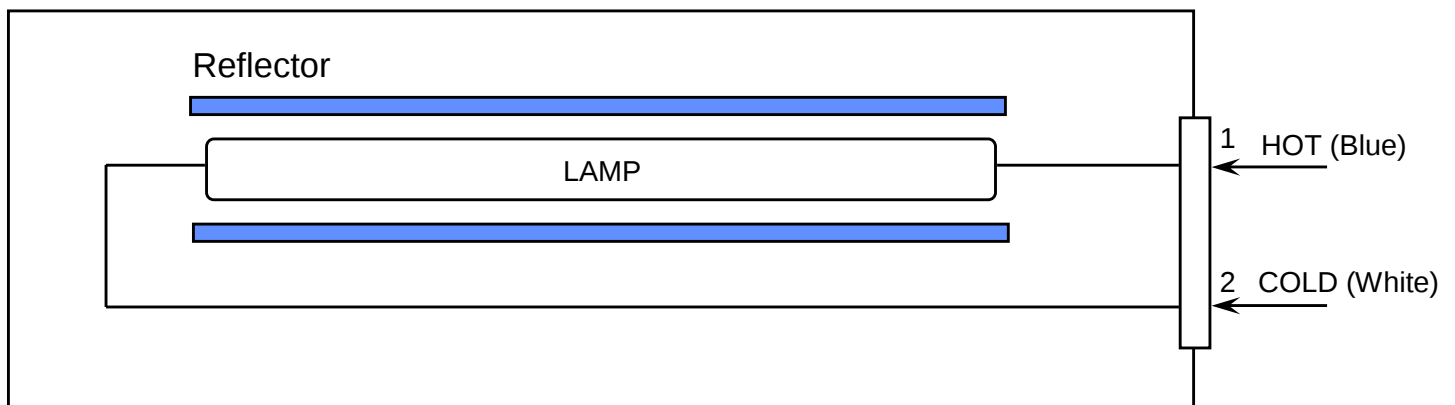

Note) The output of the inverter may change according to the material of the reflector.

5. INPUT TERMINAL PIN ASSIGNMENT

5.1. Input Signal & Power (LVDS, Connector : JAE FI-XB30SRLZ-HF11)
Mating Connector : JAE FI-X30M or compatible)

No.	Symbol	Function	Polarity	Remarks
1	VSS	Ground		
2	VDD	POWER SUPPLY +3.3V		
3	VDD	POWER SUPPLY +3.3V		
4	VEEDID	DDC 3.3V Power		Typ 5mA Max 10mA
5	NC	No Connection		
6	CLKEDID	DDC Clock		
7	DATAEDID	DDC data		
8	O_RxIN0-	LVDS Differential Data INPUT (Odd R0-R5,G0)	Negative	
9	O_RxIN0+	LVDS Differential Data INPUT (Odd R0-R5,G0)	Positive	
10	GND	Ground		
11	O_RxIN1-	LVDS Differential Data INPUT (Odd G1-G5,B0-B1)	Negative	
12	O_RxIN1+	LVDS Differential Data INPUT (Odd G1-G5,B0-B1)	Positive	
13	GND	Ground		
14	O_RxIN2-	LVDS Differential Data INPUT (Odd B2-B5,Sync,DE)	Negative	
15	O_RxIN2+	LVDS Differential Data INPUT (Odd B2-B5,Sync,DE)	Positive	
16	GND	Ground		
17	O_RxCLK-	LVDS Differential Data INPUT (Odd Clock)	Negative	
18	O_RxCLK+	LVDS Differential Data INPUT (Odd Clock)	Positive	
19	GND	Ground		
20	E_RxIN0-	LVDS Differential Data INPUT (Even R0-R5,G0)	Negative	
21	E_RxIN0+	LVDS Differential Data INPUT (Even R0-R5,G0)	Positive	
22	GND	Ground		
23	E_RxIN1-	LVDS Differential Data INPUT (Even G1-G5,B0-B1)	Negative	
24	E_RxIN1+	LVDS Differential Data INPUT (Even G1-G5,B0-B1)	Positive	
25	GND	Ground		
26	E_RxIN2-	LVDS Differential Data INPUT (Even B2-B5,Sync,DE)	Negative	
27	E_RxIN2+	LVDS Differential Data INPUT (Even B2-B5,Sync,DE)	Positive	
28	GND	Ground		
29	E_RxCLK-	LVDS Differential Data INPUT (Even Clock)	Negative	
30	E_RxCLK+	LVDS Differential Data INPUT (Even Clock)	Positive	

Samsung Secret

5.2 LVDS Interface : Transmitter DS90CF363 or Compatible

LVDS for Odd pixel


Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
44	TxIN0	RO0	12	TxIN11	GO5
45	TxIN1	RO1	13	TxIN12	BO0
47	TxIN2	RO2	15	TxIN13	BO1
48	TxIN3	RO3	16	TxIN14	BO2
1	TxIN4	RO4	18	TxIN15	BO3
3	TxIN5	RO5	19	TxIN16	BO4
4	TxIN6	GO0	20	TxIN17	BO5
6	TxIN7	GO1	22	TxIN18	Hsync
7	TxIN8	GO2	23	TxIN19	Vsync
9	TxIN9	GO3	25	TxIN20	DE
10	TxIN10	GO4	26	TxCLK IN	Clock

LVDS for Even pixel

Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
44	TxIN0	RE0	12	TxIN11	GE5
45	TxIN1	RE1	13	TxIN12	BE0
47	TxIN2	RE2	15	TxIN13	BE1
48	TxIN3	RE3	16	TxIN14	BE2
1	TxIN4	RE4	18	TxIN15	BE3
3	TxIN5	RE5	19	TxIN16	BE4
4	TxIN6	GE0	20	TxIN17	BE5
6	TxIN7	GE1	22	TxIN18	N/C
7	TxIN8	GE2	23	TxIN19	N/C
9	TxIN9	GE3	25	TxIN20	N/C
10	TxIN10	GE4	26	TxCLK IN	Clock

Samsung Secret

LVDS Interface

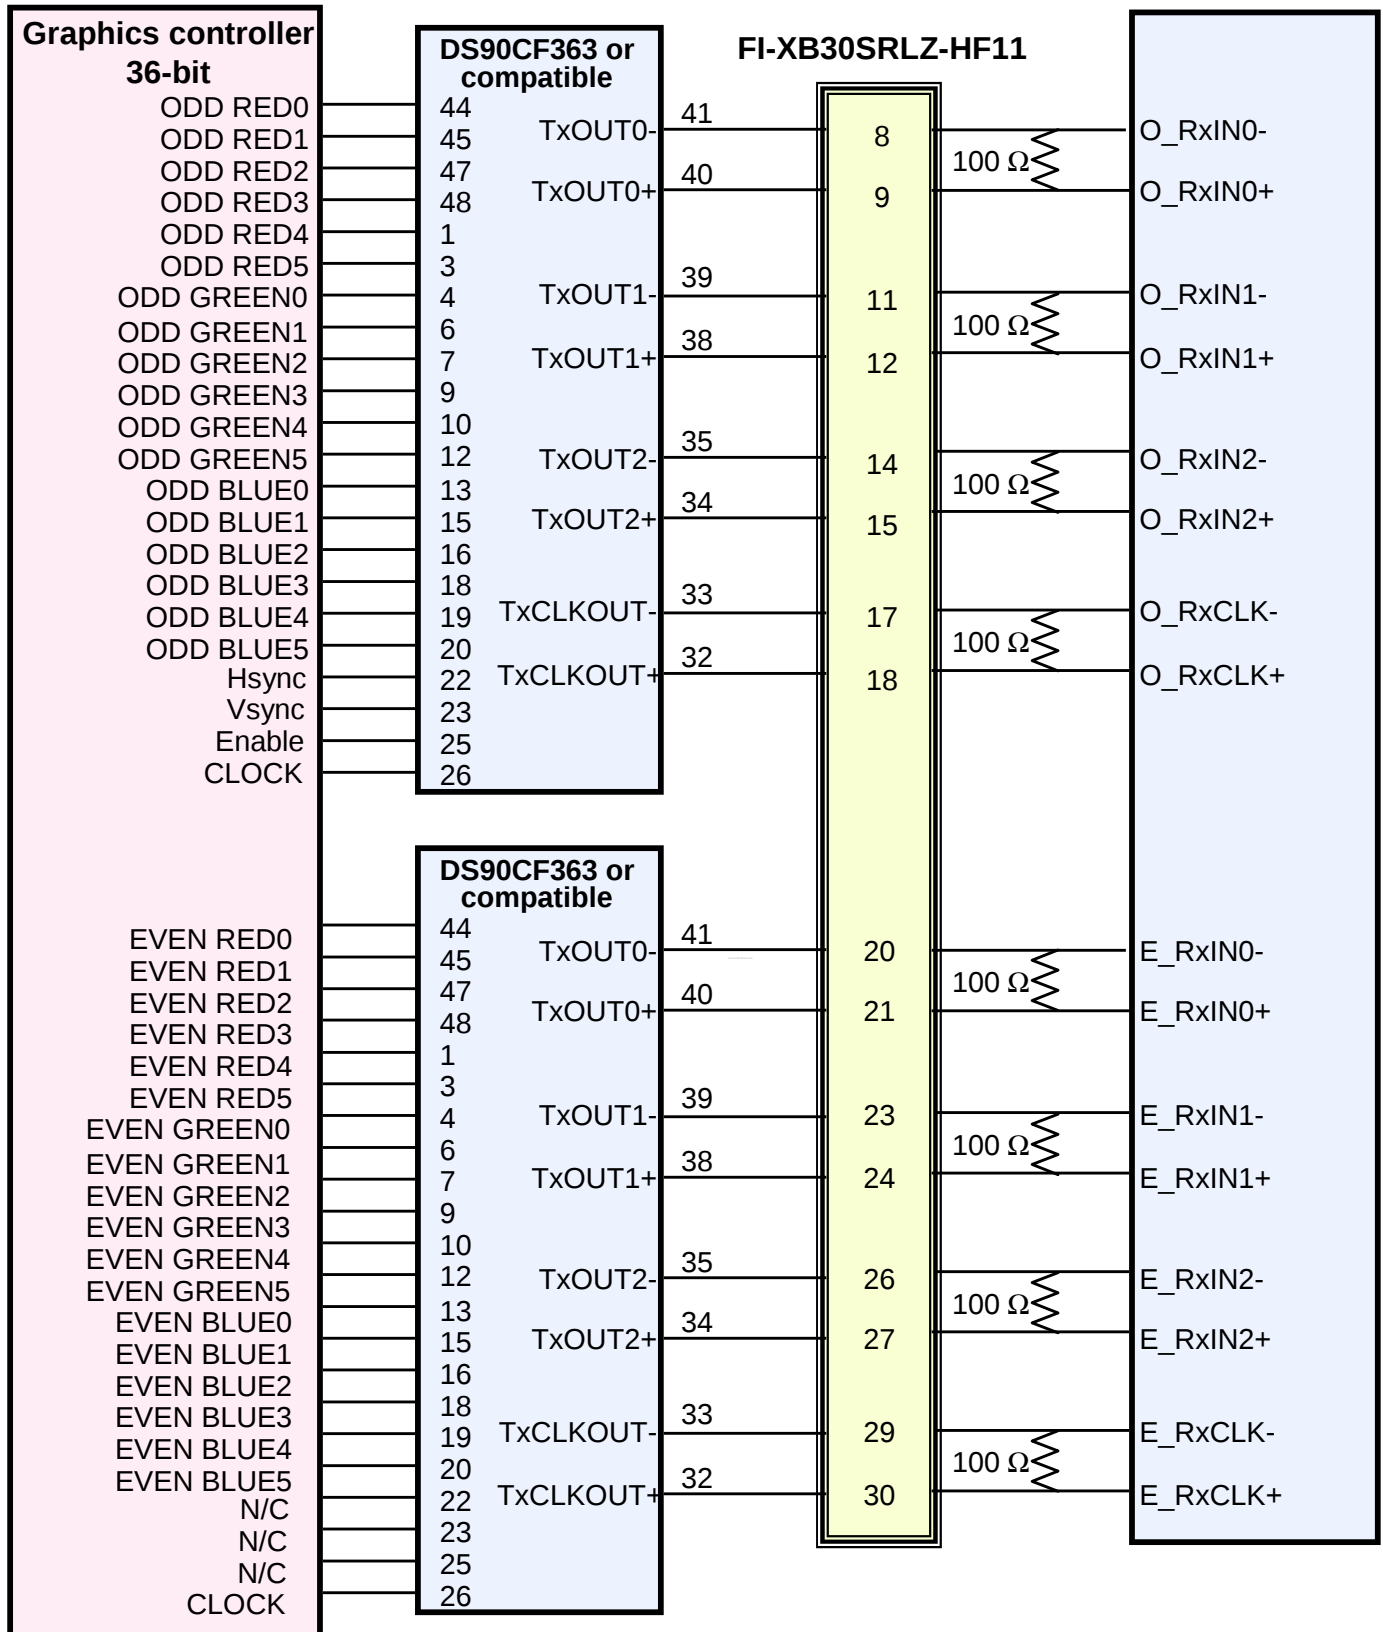

Note : The LCD Module uses a 100ohm resistor between positive and negative lines of each receiver input.

5.3 BACK LIGHT UNIT


Approval

Connector : JST BHSR - 02VS -1
Mating Connector : SM02B-BHSS-1(JST)

Pin NO.	Symbol	Color	Function
1	HOT	Blue	High Voltage
2	COLD	White	Low Voltage

5.4 Timing Diagrams of LVDS For Transmission

LVDS Receiver : Integrated T-CON

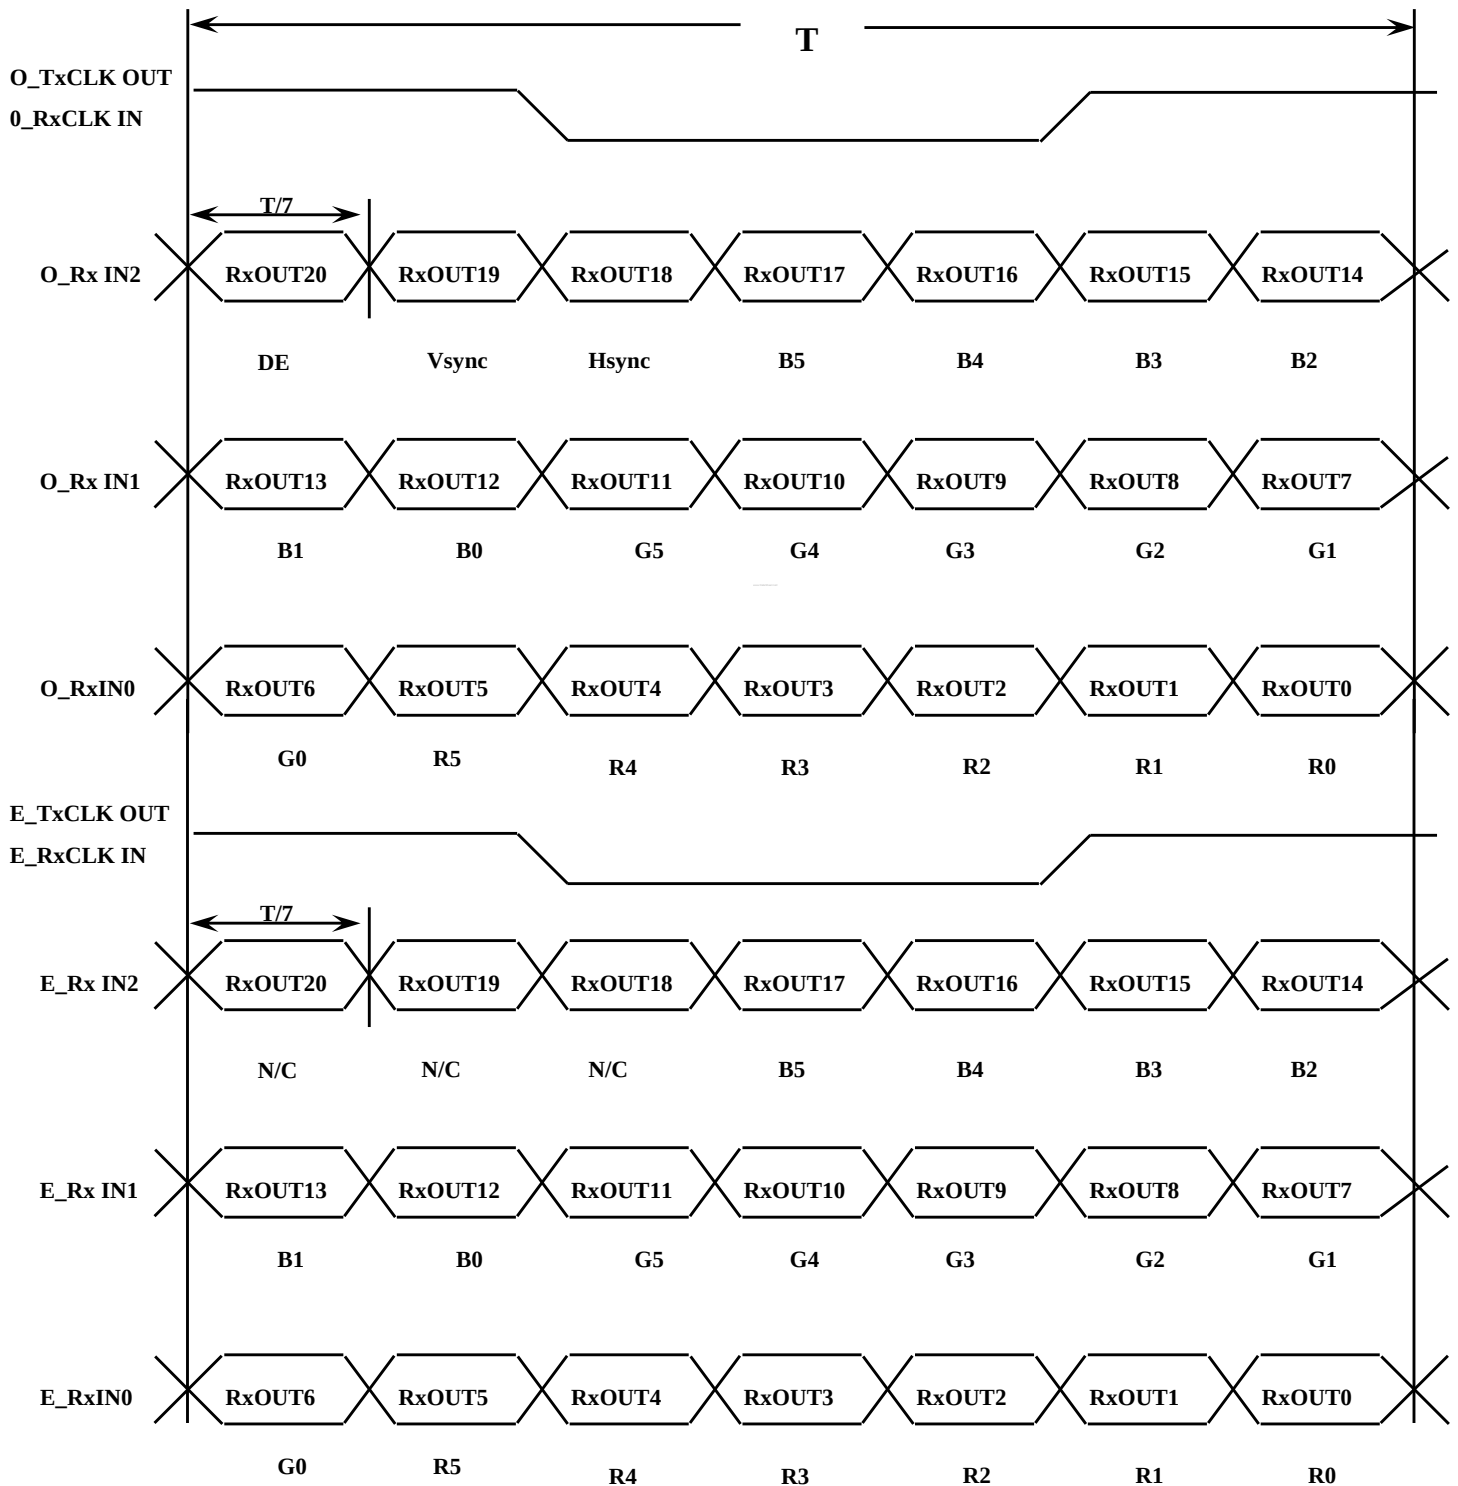

Samsung Secret

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

Color	Display	Data Signal																		Gray Scale Level
		Red						Green						Blue						
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	45	B5	
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	-
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	-
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	-
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	-
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1	-
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	-
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
Gray Scale Of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	Dark	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
	↑	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R61
	Light	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R62
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R63
Gray Scale Of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	Dark	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	G1
	↑	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	G2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0	G61
	Light	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	G62
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	G63
Gray Scale Of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	Dark	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	B1
	↑	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	B2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	B61
	Light	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	B62
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	B63


Note 1) Definition of gray :

Rn: Red gray, Gn: Green gray, Bn: Blue gray (n=gray level)

Note 2) Input signal: 0 =Low level voltage, 1=High level voltage

Samsung Secret

5.6 Pixel Format in the display

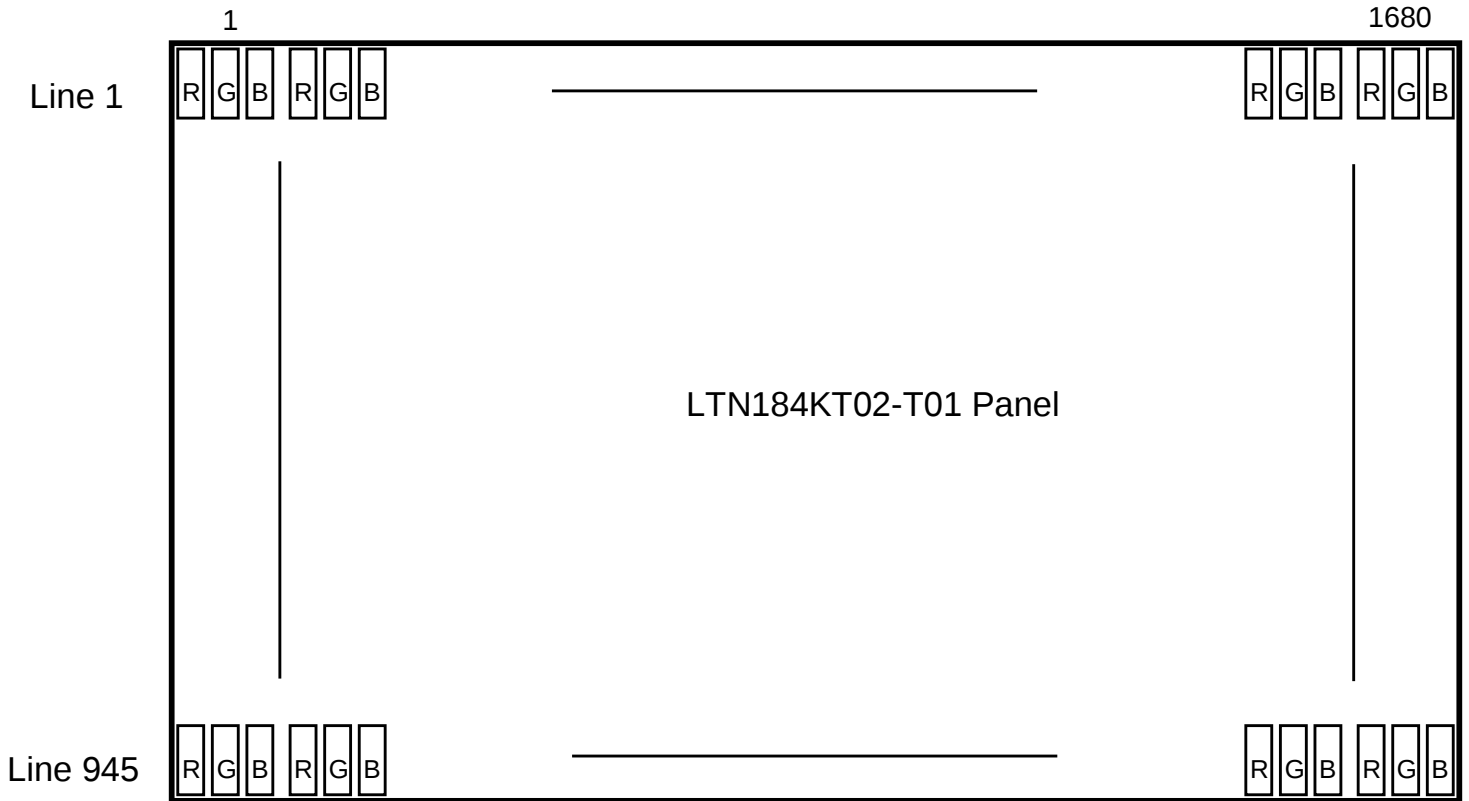

5.7 DVR Address

Slave address of DVR is 9Eh and 9Fh

. 9Eh : reading


. 9Fh : writing

I²C Bus Format

Start	Slave Address							W R	ACK	Data								ACK	Stop
	1	0	0	1	1	1	1			D6	D5	D4	D3	D2	D1	D0	P		

ACK → Acknowledge

P → Program

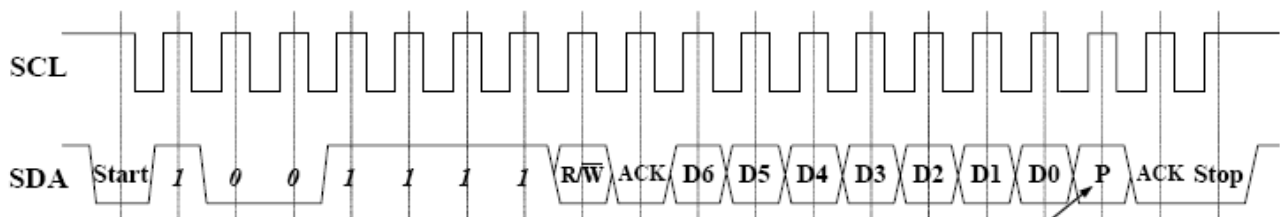

(1) When READ operation, P = don't-care.

(2) When WRITE operation,

P = 1 → Register Writing

P = 0 → E²PROM CELL Writing (Program)

[DVR Sub Address]

Samsung Secret


6. INTERFACE TIMING

Approval

6.1 Timing Parameters

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frame Frequency	Cycle	TV	965	975	985	Lines	
Vertical Active Display Term	Display Period	TVD	-	945	-	Lines	
One Line Scanning Time	Cycle	TH	932	950	1050	Clocks	2ch
Horizontal Active Display Term	Display Period	THD	-	840	-	Clocks	2ch

6.2 Timing diagrams of interface signal

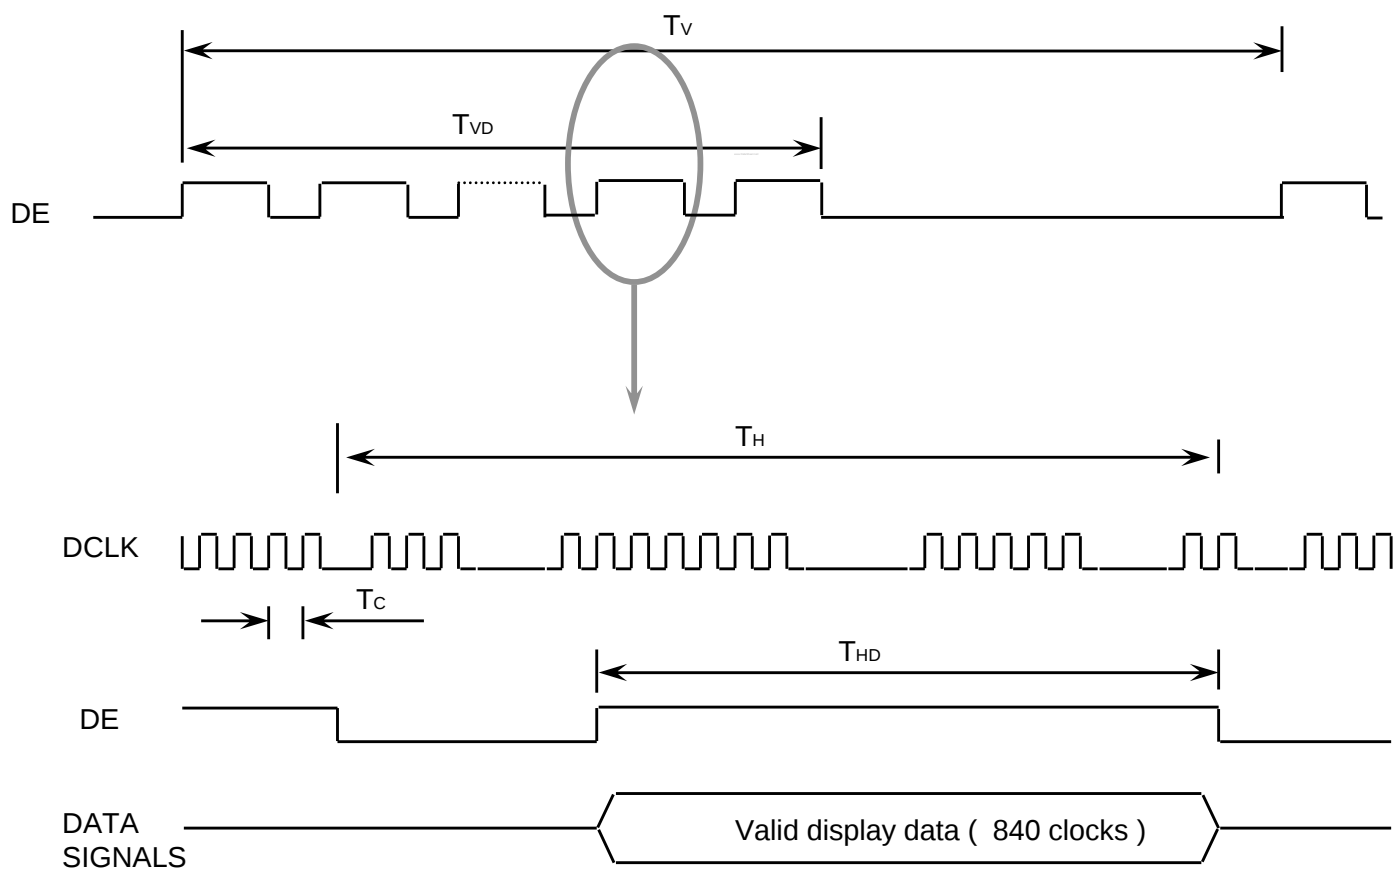


Samsung Secret

6.3 Power ON/OFF Sequence

Approval

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

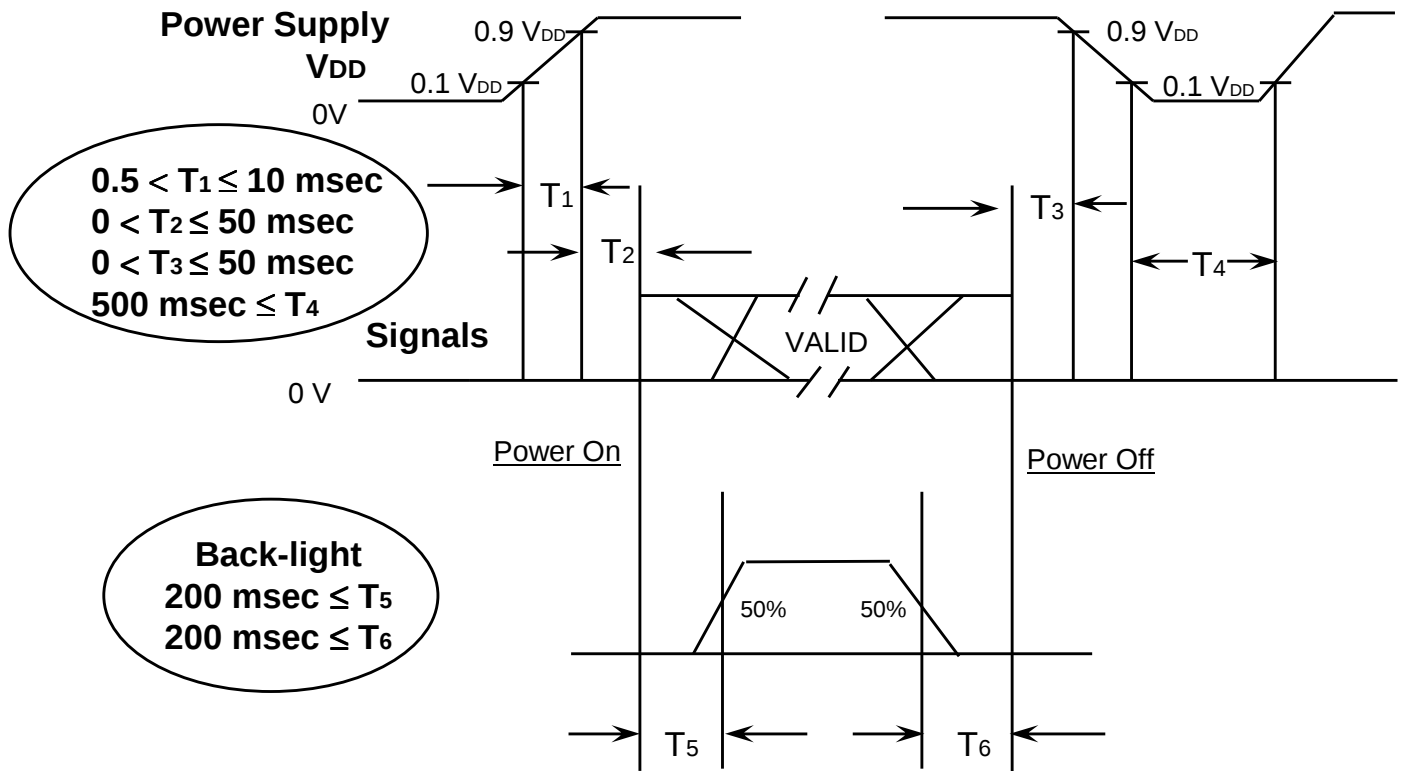

Power ON/OFF Sequence

- T1 : Vdd rising time from 10% to 90%
- T2 : The time from Vdd to valid data at power ON.
- T3 : The time from valid data off to Vdd off at power Off.
- T4 : Vdd off time for Windows restart
- T5 : The time from valid data to B/L enable at power ON.
- T6 : The time from valid data off to B/L disable at power Off.

NOTE.

- (1) The supply voltage of the external system for the module input should be the same as the definition of V_{DD}.
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of V_{DD} = off level, please keep the level of input signals on the low or keep a high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.

Samsung Secret





7. Mechanical Outline Dimension

Approval

[Refer to the next page]

Samsung Secret

NO	T	U	Y	W
PART NAME	CODE NO	SPECIFICATION	D'TY	SPEC NO.
OUTLINE DIMENSION			1	

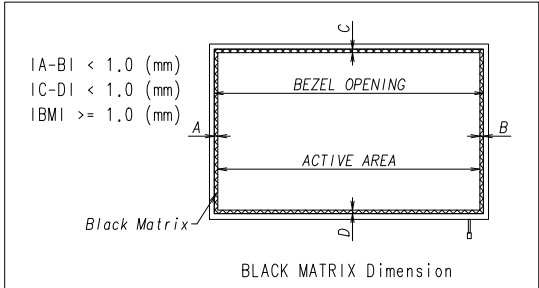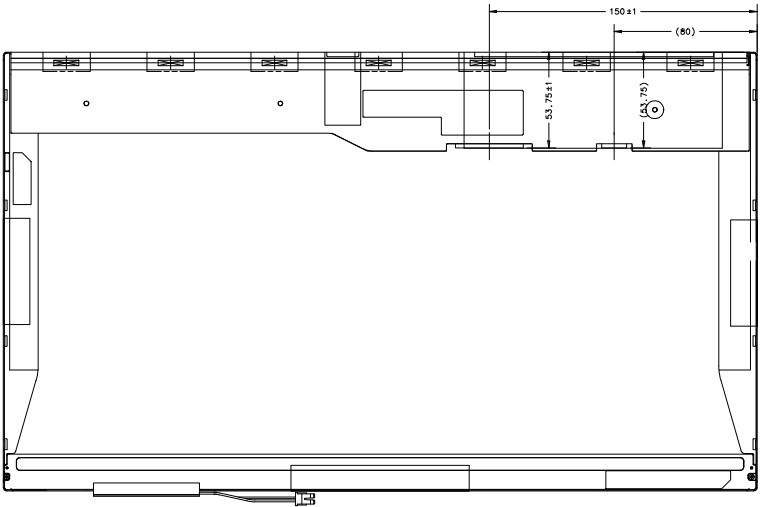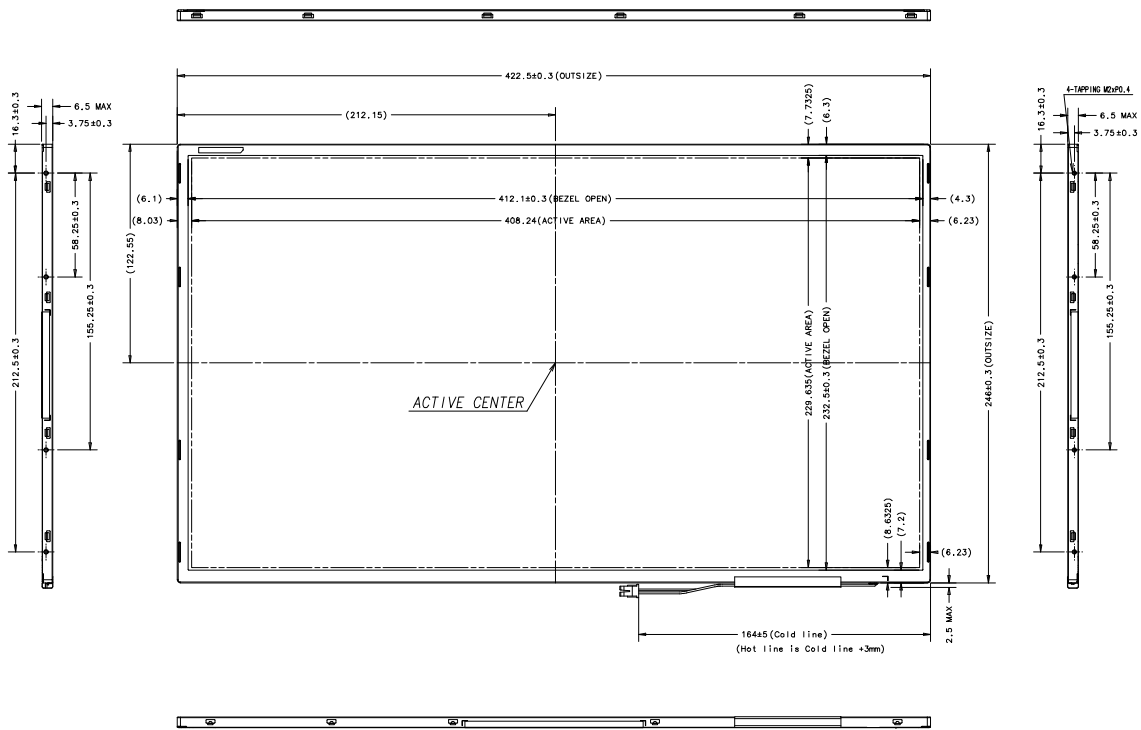

* NOTE

- SIGNAL INTERFACE CONNECTOR TO BE SPECIFIED AS BELOW.
 - MAKER : JAE
 - PART NO : FI-XB30SRLZ-HF11 COMPATIBLE
- CCFT CONNECTOR FOR BACKLIGHT TO BE SPECIFIED AS BELOW.
 - MAKER : JST
 - PART NO : BHSR-03VS-1 COMPATIBLE
 - LAMP DIAMETER : D2.0
- CALIFERS MEASURING FORCE : 750 ± 250 gf
- ALLOWED DEPTH OF USERHOLE SCREW INSERTION IS 2.5mm MAX
- WEIGHT SPEC : 750 g MAX
- USER HOLE TORQUE SPEC : 3.0kgf-cm MAX

STEP	LEVEL	REVISION	DATE	DESCRIPTION OF REVISION	REASON	MODEL NAME	DATE
0	1	1	10.05.10	INITIAL	INITIAL	LTN184RT02-T01	
1	1	1	10.05.10	INITIAL	INITIAL		
2	1	1	10.05.10	INITIAL	INITIAL		
3	1	1	10.05.10	INITIAL	INITIAL		
4	1	1	10.05.10	INITIAL	INITIAL		
5	1	1	10.05.10	INITIAL	INITIAL		
6	1	1	10.05.10	INITIAL	INITIAL		
7	1	1	10.05.10	INITIAL	INITIAL		
8	1	1	10.05.10	INITIAL	INITIAL		
9	1	1	10.05.10	INITIAL	INITIAL		
10	1	1	10.05.10	INITIAL	INITIAL		
11	1	1	10.05.10	INITIAL	INITIAL		
12	1	1	10.05.10	INITIAL	INITIAL		
13	1	1	10.05.10	INITIAL	INITIAL		
14	1	1	10.05.10	INITIAL	INITIAL		
15	1	1	10.05.10	INITIAL	INITIAL		
16	1	1	10.05.10	INITIAL	INITIAL		
17	1	1	10.05.10	INITIAL	INITIAL		
18	1	1	10.05.10	INITIAL	INITIAL		
19	1	1	10.05.10	INITIAL	INITIAL		
20	1	1	10.05.10	INITIAL	INITIAL		
21	1	1	10.05.10	INITIAL	INITIAL		
22	1	1	10.05.10	INITIAL	INITIAL		
23	1	1	10.05.10	INITIAL	INITIAL		
24	1	1	10.05.10	INITIAL	INITIAL		
25	1	1	10.05.10	INITIAL	INITIAL		
26	1	1	10.05.10	INITIAL	INITIAL		
27	1	1	10.05.10	INITIAL	INITIAL		
28	1	1	10.05.10	INITIAL	INITIAL		
29	1	1	10.05.10	INITIAL	INITIAL		
30	1	1	10.05.10	INITIAL	INITIAL		
31	1	1	10.05.10	INITIAL	INITIAL		
32	1	1	10.05.10	INITIAL	INITIAL		
33	1	1	10.05.10	INITIAL	INITIAL		
34	1	1	10.05.10	INITIAL	INITIAL		
35	1	1	10.05.10	INITIAL	INITIAL		
36	1	1	10.05.10	INITIAL	INITIAL		
37	1	1	10.05.10	INITIAL	INITIAL		
38	1	1	10.05.10	INITIAL	INITIAL		
39	1	1	10.05.10	INITIAL	INITIAL		
40	1	1	10.05.10	INITIAL	INITIAL		
41	1	1	10.05.10	INITIAL	INITIAL		
42	1	1	10.05.10	INITIAL	INITIAL		
43	1	1	10.05.10	INITIAL	INITIAL		
44	1	1	10.05.10	INITIAL	INITIAL		
45	1	1	10.05.10	INITIAL	INITIAL		
46	1	1	10.05.10	INITIAL	INITIAL		
47	1	1	10.05.10	INITIAL	INITIAL		
48	1	1	10.05.10	INITIAL	INITIAL		
49	1	1	10.05.10	INITIAL	INITIAL		
50	1	1	10.05.10	INITIAL	INITIAL		
51	1	1	10.05.10	INITIAL	INITIAL		
52	1	1	10.05.10	INITIAL	INITIAL		
53	1	1	10.05.10	INITIAL	INITIAL		
54	1	1	10.05.10	INITIAL	INITIAL		
55	1	1	10.05.10	INITIAL	INITIAL		
56	1	1	10.05.10	INITIAL	INITIAL		
57	1	1	10.05.10	INITIAL	INITIAL		
58	1	1	10.05.10	INITIAL	INITIAL		
59	1	1	10.05.10	INITIAL	INITIAL		
60	1	1	10.05.10	INITIAL	INITIAL		
61	1	1	10.05.10	INITIAL	INITIAL		
62	1	1	10.05.10	INITIAL	INITIAL		
63	1	1	10.05.10	INITIAL	INITIAL		
64	1	1	10.05.10	INITIAL	INITIAL		
65	1	1	10.05.10	INITIAL	INITIAL		
66	1	1	10.05.10	INITIAL	INITIAL		
67	1	1	10.05.10	INITIAL	INITIAL		
68	1	1	10.05.10	INITIAL	INITIAL		
69	1	1	10.05.10	INITIAL	INITIAL		
70	1	1	10.05.10	INITIAL	INITIAL		
71	1	1	10.05.10	INITIAL	INITIAL		
72	1	1	10.05.10	INITIAL	INITIAL		
73	1	1	10.05.10	INITIAL	INITIAL		
74	1	1	10.05.10	INITIAL	INITIAL		
75	1	1	10.05.10	INITIAL	INITIAL		
76	1	1	10.05.10	INITIAL	INITIAL		
77	1	1	10.05.10	INITIAL	INITIAL		
78	1	1	10.05.10	INITIAL	INITIAL		
79	1	1	10.05.10	INITIAL	INITIAL		
80	1	1	10.05.10	INITIAL	INITIAL		
81	1	1	10.05.10	INITIAL	INITIAL		
82	1	1	10.05.10	INITIAL	INITIAL		
83	1	1	10.05.10	INITIAL	INITIAL		
84	1	1	10.05.10	INITIAL	INITIAL		
85	1	1	10.05.10	INITIAL	INITIAL		
86	1	1	10.05.10	INITIAL	INITIAL		
87	1	1	10.05.10	INITIAL	INITIAL		
88	1	1	10.05.10	INITIAL	INITIAL		
89	1	1	10.05.10	INITIAL	INITIAL		
90	1	1	10.05.10	INITIAL	INITIAL		
91	1	1	10.05.10	INITIAL	INITIAL		
92	1	1	10.05.10	INITIAL	INITIAL		
93	1	1	10.05.10	INITIAL	INITIAL		
94	1	1	10.05.10	INITIAL	INITIAL		
95	1	1	10.05.10	INITIAL	INITIAL		
96	1	1	10.05.10	INITIAL	INITIAL		
97	1	1	10.05.10	INITIAL	INITIAL		
98	1	1	10.05.10	INITIAL	INITIAL		
99	1	1	10.05.10	INITIAL	INITIAL		
100	1	1	10.05.10	INITIAL	INITIAL		

8. PACKING


Approval

1. CARTON(Internal Package)

(1) Packing Form

Corrugated Cardboard box and Corrupad form as shock absorber

(2) Packing Method

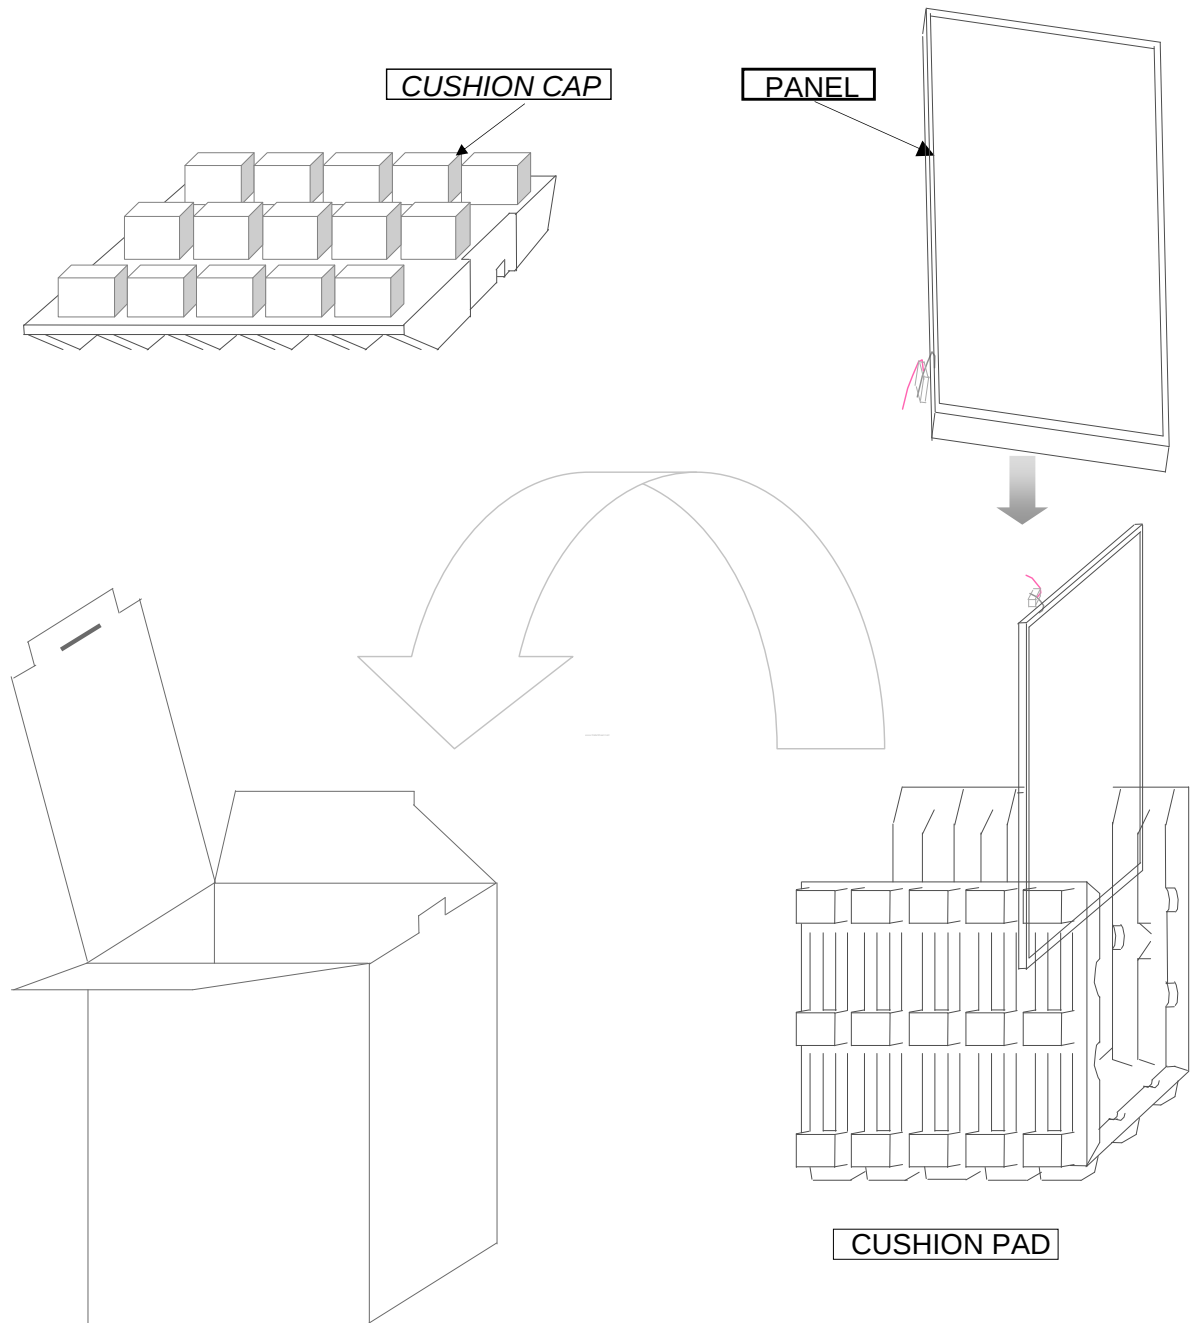

Note 1) Total Weight : Approximately 8.95 kg

2) Acceptance number of piling : 10 sets

3) Carton size : 380×350×492(mm)

Samsung Secret

(3)Packing Material

No	Part name	Quantity
1	Static electric protective sack	10 pcs
2	Packing case (Inner box) included shock absorber	1 set
3	Pictorial marking	2 pcs
4	Carton	1 set


9. MARKINGS & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


(1) Parts number : LTN184KT02-T01

(2) Revision : Three letters

(3) Lot number : 6 B 3 C XX XX XX T01

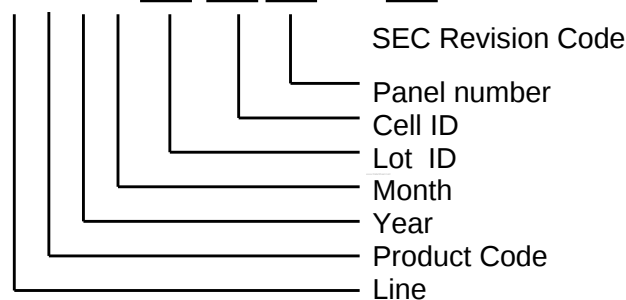

(4) Nameplate Indication

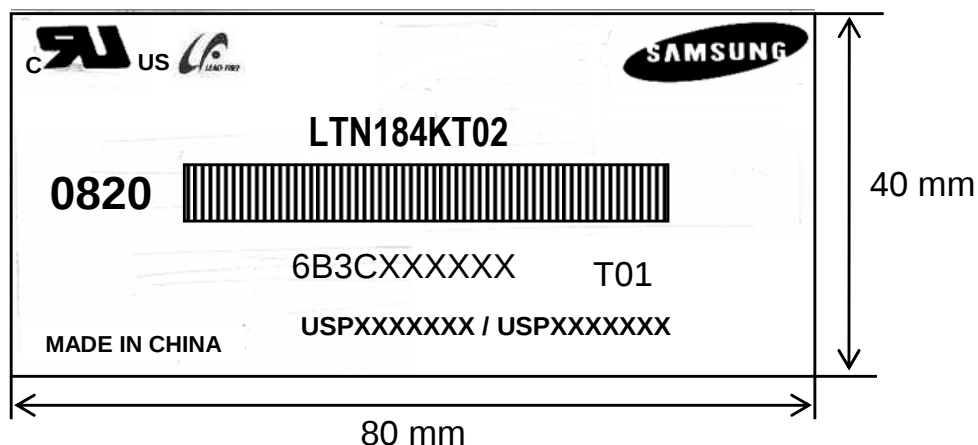

Parts name : LTN184KT02 - T01

Lot number : 6B3CXXXXXX


Inspected work week : 0820(2008 year, 20th week)

Product Revision Code : T01


Samsung Secret

(5) High voltage caution mark

High voltage caution label

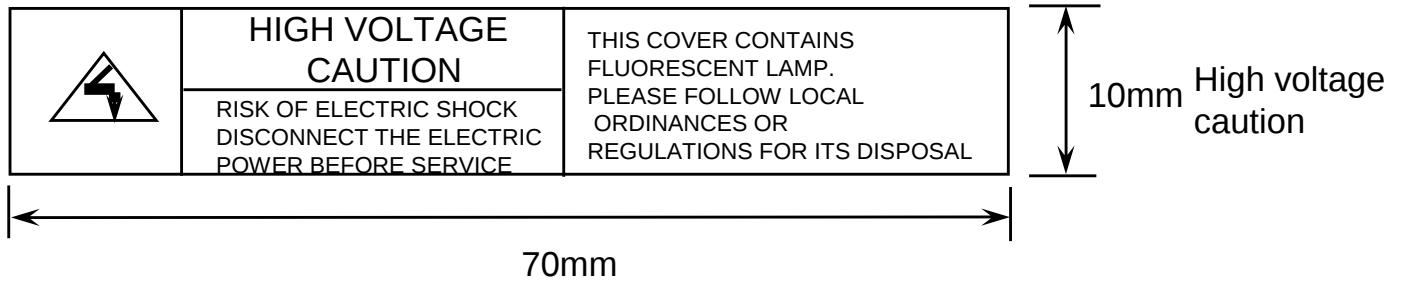

(6) Packing small box attach

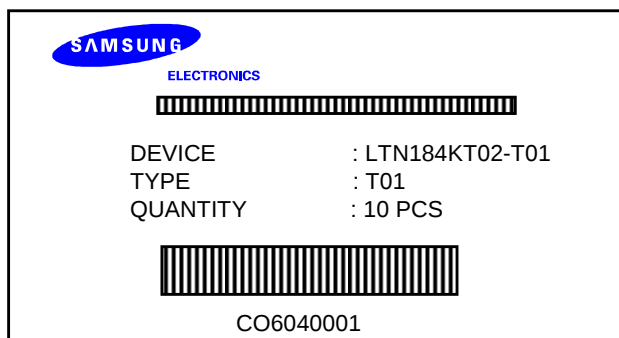

(7) Packing box Marking : Samsung TFT-LCD Brand Name



10. GENERAL PRECAUTIONS

Approval

1. Handling

- (a) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist and bend the modules.
- (b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module and CCFT backlight.
- (c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (f) The desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (h) Protect the module from static , it may cause damage to the C-MOS Gate Array IC.
- (i) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (j) Do not disassemble the module.
- (k) Do not pull or fold the lamp wire.
- (l) Do not adjust the variable resistor which is located on the back side.
- (m) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (n) Pins of I/F connector shall not be touched directly with bare hands.

Samsung Secret

2. STORAGE

Approval

- (a) Do not leave the module in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD module in direct sunlight.
- (c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.

3. OPERATION

- (a) Do not connect,disconnect the module in the “ Power On” condition.
- (b) Power supply should always be turned on/off by following item 6.3
“ Power on/off sequence “.
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the backlight connector and its inverter power supply shall be a minimized length and be connected directly . The longer cable between the backlight and the inverter may cause lower luminance of lamp(CCFT) and may require higher startup voltage(Vs).
- (e) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.

4. OTHERS

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, so on)
Otherwise the module may be damaged.
- (d) If the module displays the same pattern continuously for a long period of time,it can be the situation when the image “sticks” to the screen.
- (e) This module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

Samsung Secret

11. EDID

Approval

LTN184KT02-T01(1680 *945) EDID Sheet for Toshiba						
Address (HEX)	FUNCTION	Value HEX	BIN	DEC	ASCII or Data	Notes
00	Header	00	00000000	0		EDID Header
01		FF	11111111	255		
02		FF	11111111	255		
03		FF	11111111	255		
04		FF	11111111	255		
05		FF	11111111	255		
06		FF	11111111	255		
07		00	00000000	0		
08	ID Manufacturer Name	4C	01001100	76	S	3 character ID
					E	
09		A3	10100011	163	C	"SEC"
0A	ID Product Code	4B	01001011	75	[K]	
0B		32	00110010	50	[2]	
0C	32-bit serial no.	00	00000000	0		
0D		00	00000000	0		
0E		00	00000000	0		
0F		00	00000000	0		
10	Week of manufacture	00	00000000	0		
11	Year of manufacture	12	00010010	18	2008	2008
12	EDID Structure Ver.	01	00000001	1	1	EDID Ver. 1.0
13	EDID revision #	03	00000011	3	3	EDID Rev. 3
14	Video input definition	80	10000000	128		
15	Max H image size	29	00101001	41	41	41 cm(approx)
16	Max V image size	17	00010111	23	23	23 cm(approx)
17	Display Gamma	78	01111000	120	2.2	Gamma 2.2
18	Feature support	0A	00001010	10		
19	Red/green low bits	8A	10001010	138		10001010
1A	Blue/white low bits	D5	11010101	213		11010101
1B	Red x/ high bits	96	10010110	150	0.588	Red x0.588= 1001011010
1C	Red y	57	01010111	87	0.340	Red y0.340= 0101011100
1D	Green x	54	01010100	84	0.330	Green x0.330= 0101010010
1E	Green y	89	10001001	137	0.537	Green y0.537= 1000100010
1F	Blue x	26	00100110	38	0.151	Blue x0.151= 0010011011
20	Blue y	1F	00011111	31	0.122	Blue y0.122= 0001111101
21	White x	50	01010000	80	0.313	White x0.313= 0101000001
22	White y	54	01010100	84	0.329	White y0.329= 0101010001
23	Established timing 1	00	00000000	0		
24	Established timing 2	00	00000000	0		
25	Established timing 3	00	00000000	0		
26	Standard timing #1	01	00000001	1		not used
27		01	00000001	1		
28	Standard timing #2	01	00000001	1		not used
29		01	00000001	1		

Samsung Secret

2A	Standard timing #3	01	00000001	1		not used
2B		01	00000001	1		
2C	Standard timing #4	01	00000001	1		not used
2D		01	00000001	1		
2E	Standard timing #5	01	00000001	1		not used
2F		01	00000001	1		
30	Standard timing #6	01	00000001	1		not used
31		01	00000001	1		
32	Standard timing #7	01	00000001	1		not used
33		01	00000001	1		
34	Standard timing #8	01	00000001	1		not used
35		01	00000001	1		
36	Detailed timing/monitor descriptor #1	88	10001000	136	121.68	Main clock= 121.68(60.84 *2 MHz)
37		2F	00101111	47		
38		90	10010000	144	1680	Hor active=840*2 pixels
39		90	10010000	144	400	Hor blanking=400 pixels
3A		61	01100001	97		4bit : 4bit
3B		B1	10110001	177	945	Vertical active=945 lines
3C		1E	00011110	30	30	Vertical blanking=30 lines
3D		30	00110000	48		4bit : 4bit
3E		30	00110000	48	48	Hor sync. Offset=48 pixels
3F		20	00100000	32	32	H sync. Width=32 pixels
40		26	00100110	38	2	V sync. Offset=2 lines
					6	V sync. Width=6 lines
41		00	00000000	0		2bit : 2bit :2bit :2bit
42		99	10011001	153	409	H image size= 409 mm(approx)
43		E6	11100110	230	230	V image size = 230 mm(approx)
44		10	00010000	16		
45		00	00000000	0		No Horizontal Border
46		00	00000000	0		No Vertical Border
47		19	00011001	25		
48	Detailed timing/monitor descriptor #2	00	00000000	0		Manufacturer Specified (Timing)
49		00	00000000	0		
4A		00	00000000	0		
4B		0F	00001111	15		
4C		00	00000000	0		
4D		00	00000000	0		Value=HSPWmin / 2
4E		00	00000000	0		Value=HSPWmax / 2
4F		00	00000000	0		Value=Thbpmin / 2
50		00	00000000	0		Value=Thbpmax / 2
51		00	00000000	0		Value=VSPWmin / 2
52		00	00000000	0		Value=VSPWmax / 2
53		00	00000000	0		Value=TVbpmin / 2
54		00	00000000	0		Value=TVbpmax / 2
55		32	00110010	50		Thpmin=value*2 + HA pixelclks
56		A0	10100000	160		Thpmax=value*2 + HA pixelclks
57		05	00000101	5		Tvpmin=value*2 + VA lines
58		1B	00011011	27		Tvpmax=value*2 + VA lines
59		00	00000000	0		Module revision

5A	Detailed timing/monitor descriptor #3	00	00000000	0		ASCII Data String Tag
5B		00	00000000	0		
5C		00	00000000	0		
5D		FE	11111110	254		
5E		00	00000000	0		
5F		53	01010011	83	[S]	
60		41	01000001	65	[A]	
61		4D	01001101	77	[M]	
62		53	01010011	83	[S]	
63		55	01010101	85	[U]	
64		4E	01001110	78	[N]	
65		47	01000111	71	[G]	
66		0A	00001010	10	[^]	
67		20	00100000	32	[]	
68		20	00100000	32	[]	
69		20	00100000	32	[]	
6A		20	00100000	32	[]	
6B		20	00100000	32	[]	
6C	Detailed timing/monitor descriptor #4	00	00000000	0		Monitor Name Tag (ASCII)
6D		00	00000000	0		
6E		00	00000000	0		
6F		FE	11111110	254		
70		00	00000000	0		
71		4C	01001100	76	[L]	
72		54	01010100	84	[T]	
73		4E	01001110	78	[N]	
74		31	00110001	49	[1]	
75		38	00111000	56	[8]	
76		34	00110100	52	[4]	
77		4B	01001011	75	[K]	
78		54	01010100	84	[T]	
79		30	00110000	48	[0]	
7A		32	00110010	50	[2]	
7B		54	01010100	84	[T]	
7C		30	00110000	48	[0]	
7D		31	00110001	49	[1]	
7E	Extension Flag	00	00000000	0		
7F	Checksum	C5	11000101	197		