



SANYO Semiconductors

DATA SHEET

LV5105FN

— Bi-CMOS IC
For cell phone system
Power supply

Overview

The LV5105FN is a power supply for a cell phone system that integrates four series regulators, LED driver (with 5V output) on a single chip.

Functions

- REG×4 (CMOS output)
- DET circuit (one for REG1, one for VBAT (with reset output))
- Thermal shutdown circuit (150°C)
- Three-color LED driver (charge pump 5V output incorporated)
- FRONT LED driver
- Mic bias output

Features

- Low power consumption 4μA when REG4 and VBATDET operate
30μA when REG1, REG2, REG3, and REG4 + DET1 and VBATDET operate
- Built-in charge pump circuit VBAT : 3.2V to 4.5V, 5V constant output with a load of 80mA
- Built-in 3-color LED drive circuit Three independent colors, 128-step PWM intensity control

Specifications

Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V _{CC} max		7	V
Allowable power dissipation	P _d max	Ta ≤ 75°C *Mounted on a board.	440	mW
Operating temperature	T _{opr}		-30 to +75	°C
Storage temperature	T _{stg}		-40 to +125	°C

* Mounted on a 50.0mm×50.0mm×0.8mm, glass epoxy board.

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

SANYO Semiconductor Co., Ltd.

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

LV5105FN

Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage 1	VBAT	29, 33pin	3.2 to 4.5	V
Supply voltage 2	VBATCP	3pin	3.2 to 5.9	V

Electrical Characteristics : Analog at Ta = 25°C, VBAT = 3.6V, VCHARGE = 0V, Unless otherwise specified.

[Current dissipation]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current dissipation 1	I _{CC1}	REG4, VBATDET : ON REG1, 2, 3, charge pump, DET1 : OFF no-load VBAT = 3.2V to 4.2V		4	10	μA
Current dissipation 2	I _{CC2}	REG1, 2, 4, DET1, VBATDET : ON REG3, charge pump : OFF no load		25	35	μA
Current dissipation 3	I _{CC3}	REG3, 4, VBATDET : ON REG1, 2, DET1, charge pump : OFF no load		20	28	μA
Current dissipation 4	I _{CC4}	REG1, 2, 3, 4, DET1, VBATDET : ON charge pump : OFF no load		30	42	μA
Current dissipation 5	I _{CC5}	REG1, 2, 3, 4, DET1, VBATDET : ON charge pump : OFF no load ECO : L		15	21	μA
Current dissipation 6	I _{CC6}	REG1, 2, 3, 4, charge pump, DET1, VBATDET : ON no load		5	8	mA

[REG1]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output voltage 1	V _{O1}	I _O = 30mA, ECO = H	2.74	2.8	2.86	V
Output voltage 2	V _{O1E}	I _O = 30mA, ECO = L	2.71	2.8	2.89	V
Output voltage 3	ΔV _{O1}	(I _O = 30mA, REG1 output voltage at ECO = H) - (I _O = 10mA, REG1 output voltage at I _O = 10 mA and ECO = L)	0	15	35	mV
Drop out voltage	V _{DR1}	VBAT = 2.7V, I _O = 30mA		0.04	0.06	V
Load regulation	ΔV _{OLO1}	I _O = 1 to 150mA		10	50	mV
Line regulation	ΔV _{OLN1}	VBAT = 3.3 to 4.5V, I _O = 1mA		10	60	mV
Output voltage temperature coefficient	ΔV _{O1} /ΔTj	Ta = -25 to 75°C, I _O = 30mA		±100		ppm/°C
Ripple rejection	V _{R1}	VBAT = 3.6V, I _O = 30mA, VRR = -20dBV, f _{RR} = 1kHz		65		dB
Output noise voltage	V _{ON1}	I _O = 30mA, 20Hz < f < 20kHz		75		μVrms
Output voltage 4	ΔV _{O2}	I _O = 30mA, (Output voltage with charge pump ON - Output voltage with charge pump OFF)	-35		35	mV

[REG2]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output voltage 1	V _{O2}	I _O = 30mA, ECO = H	2.55	2.6	2.65	V
Output voltage 2	V _{O2E}	I _O = 30mA, ECO = L	2.53	2.6	2.67	V
Drop out voltage	V _{DR1}	VBAT = 2.5V, I _O = 30mA		0.06	0.12	V
Load regulation	ΔV _{OLO2}	I _O = 1 to 100mA		10	100	mV
Line regulation	ΔV _{OLN2}	VBAT = 3.3 to 4.5V, I _O = 1mA		10	60	mV
Output voltage temperature coefficient	ΔV _{O2} /ΔTj	Ta = -25 to 75°C, I _O = 30mA		±100		ppm/°C
Ripple rejection	V _{R2}	VBAT = 3.6V, I _O = 30mA, VRR = -20dBV, f _{RR} = 1kHz		65		dB
Output noise voltage	V _{ON2}	I _O = 30mA, 20Hz < f < 20kHz		75		μVrms

Continued on next page.

LV5105FN

Continued from preceding page.

[REG3]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output voltage 1	V _{O3}	I _O = 30mA, ECO = H	2.79	2.85	2.91	V
Output voltage 2	V _{O3E}	I _O = 30mA, ECO = L	2.76	2.85	2.94	V
Drop out voltage	V _{DR3}	V _{BAT} = 2.7V, I _O = 30mA		0.06	0.12	V
Load regulation	ΔV _{OLO3}	I _O = 1 to 50mA		10	50	mV
Line regulation	ΔV _{OLN3}	V _{BAT} = 3.3 to 4.5V, I _O = 1mA		10	60	mV
Output voltage temperature coefficient	ΔV _{O3} /ΔT _j	T _a = -25 to 75°C, I _O = 30mA		±100		ppm/°C
Ripple rejection	V _{R3}	V _{BAT} = 3.6V, I _O = 30mA, V _{RR} = -20dBV, f _{RR} = 1kHz		65		dB
Output noise voltage	V _{ON3}	I _O = 30mA, 20Hz < f < 20kHz		75		μVrms

[REG4]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output voltage	V _{O4}	I _O = 30mA	2.91	3	3.09	V
Drop out voltage	V _{DR3}	V _{BAT} = 2.9V, I _O = 30mA		0.06	0.12	V
Load regulation	ΔV _{OLO4}	I _O = 1 to 50mA		10	50	mV
Line regulation	ΔV _{OLN4}	V _{BAT} = 3.3 to 4.5V, I _O = 1mA		10	60	mV
Output voltage temperature coefficient	ΔV _{O4} /ΔT _j	T _a = -25 to 75°C, I _O = 30mA		±100		ppm/°C
Ripple rejection	V _{R4}	V _{BAT} = 3.6V, I _O = 30mA, V _{RR} = -20dBV, f _{RR} = 1kHz		55		dB
Output noise voltage	V _{ON4}	I _O = 30mA, 20Hz < f < 20kHz		75		μVrms

[DET1]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Detection voltage	V _{D1}	H→L	2.45	2.5	2.55	V
Hysteresis width	ΔV _{H1}		75	125	175	mV
Detection voltage temperature coefficient	ΔV _{D1} /ΔT _j	T _a = -25 to 75°C		±100		ppm/°C

[VBATDET]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Detection voltage	V _{DB}	H→L	3.04	3.1	3.16	V
Hysteresis width	ΔV _{HB}		93	155	217	mV
Output pull-up resistance	R _{PDET}		1.4	1.8	2.2	MΩ
Detection voltage temperature coefficient	ΔV _{DB} /ΔT _j	T _a = -25 to 75°C		±100		ppm/°C

[Charge pump]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output voltage 1	V _{CPO1}	V _{BAT} = 3.2 to 5.9V, Load current 80mA	4.8	5	5.2	V
Oscillation frequency	C _{POS}		0.7	1	1.3	MHz
Output ripple	V _{RCP}	V _{BAT} = 3.6, Load current 80mA		±200		mVp-p
Efficiency	η	V _{BAT} = 3.2, Load current 80mA		72		%

Continued on next page.

LV5105FN

Continued from preceding page.

[LED driver]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
LEDR output voltage	VLR	$I_O = 40\text{mA}$	0	0.1	0.2	V
LEDG output voltage	VLG	$I_O = 40\text{mA}$	0	0.1	0.2	V
LEDB output voltage	VLB	$I_O = 40\text{mA}$	0	0.1	0.2	V
LEDF output voltage	VLF	$I_O = 40\text{mA}$	0	0.15	0.3	V
LEDR OFF leak	ILR			0	1	μA
LEDG OFF leak	ILG			0	1	μA
LEDB OFF leak	ILB			0	1	μA
LEDF OFF leak	ILF			0	1	μA

[Mic bias]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output ON resistance	RMO	$I_O = 10\text{mA}$		10		Ω
OFF leakage current	ILM			0	1	μA

[Output voltage (GP_0, 1)]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output H level	V_{OH}	$I_O = 1\text{mA}$	REG10 -0.3		REG10	V
Output L level	V_{OL}	$I_O = 1\text{mA}$	0		0.3	V

[Input voltage 1 (SDATA, SEN, SCLK)]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
H level	V_{INH1}	Input H level	REG10 $\times 0.8$		REG10	V
L level	V_{INL1}	Input L level	0		REG10 $\times 0.2$	V

[Input voltage 2 (T_CNT, TCXOCNT, ECO, REG3CTL, REG12CTL, PWRON, RTCINT, MSSELO, MSSELOC, KEYSENSE4, HWRESET)]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
H level	V_{INH2}	Input H level	REG40 $\times 0.8$		REG40	V
L level	V_{INL2}	Input L level	0		REG40 $\times 0.2$	V

[Input voltage 3 (RESOUT_N)]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
H level	V_{INH3}	Input H level	REG20 $\times 0.8$		REG20	V
L level	V_{INL3}	Input L level	0		REG20 $\times 0.2$	V

[Input voltage 4 (CHG_G)]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
H level	V_{INH4}	Input H level	REG40 $\times 0.8$		6	V
L level	V_{INL4}	Input L level	0		REG40 $\times 0.2$	V

Continued on next page.

Continued from preceding page.

[Input voltage 5 (Vcharge)]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
H level	V _{INH5}	Input H level	4.4		6	V
L level	V _{INL5}	Input L level	0		3.6	V

[Input voltage 6 (VBATBK)]


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
H level	V _{INH6}	Input H level	REG40 ×0.8		VBAT	V
L level	V _{INL6}	Input L level	0		REG40 ×0.2	V

Electrical Characteristics : Serial bus

[Serial transfer timing]

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Cycle time	tcy1	SCLK clock cycle	300			ns
Data setup time 1	ts0	SDEN setup time for rise of SCLK	150	-	-	ns
Data setup time 2	ts1	SDATA setup time for rise of SCLK	150	-	-	ns
Data hold time 1	th0	SDEN hold time for fall of SCLK	150	-	-	ns
Data hold time 2	th1	SDATA hold time for rise of SCLK	150	-	-	ns
Pulse width 1	tw1L	SCLK L-period pulse width	150	-	-	ns
Pulse width 2	tw1H	SCLK H-period pulse width	150	-	-	ns
Pulse width 3	tw2L	SDEN L-period pulse width	1	-	-	μs

Serial transfer timing conditions

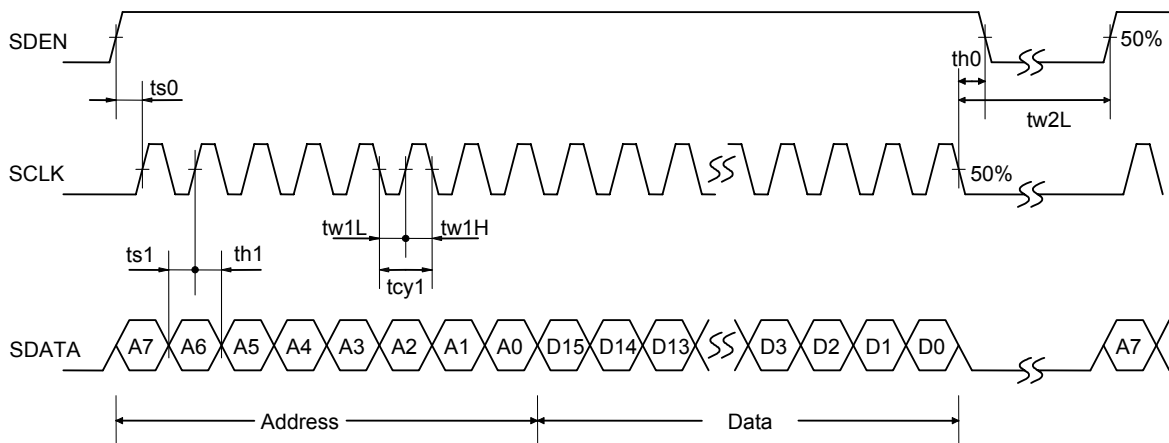

Data length : 24bit

Clock frequency : 3MHz or less

"SDATA" is taken in at fall of "SDEN" when "SCLK" of 24 clock is entered during H period of "SDEN."


(Note) "SDATA" is not taken in when "SCLK" is 23 clock or less during H period of "SDEN."

When "SCLOCK" exceeds 25 clock, "SDATA" is taken in at the 24th clock, and subsequent "SDATA" is ignored.


Package Dimensions

unit : mm (typ)

3272

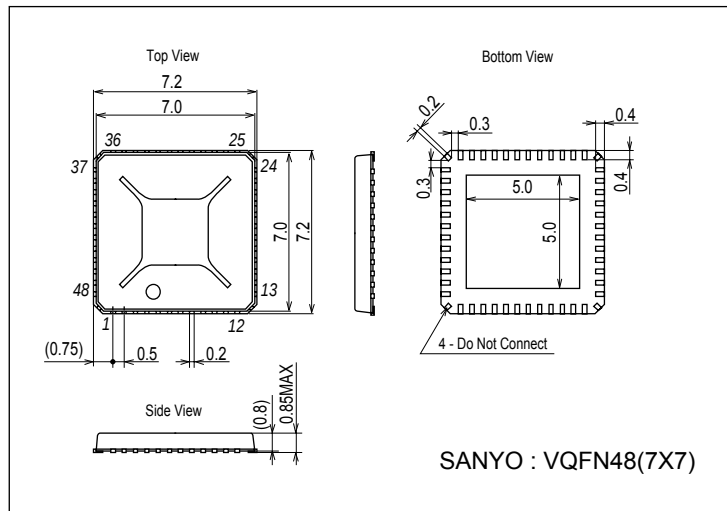

Block Diagram

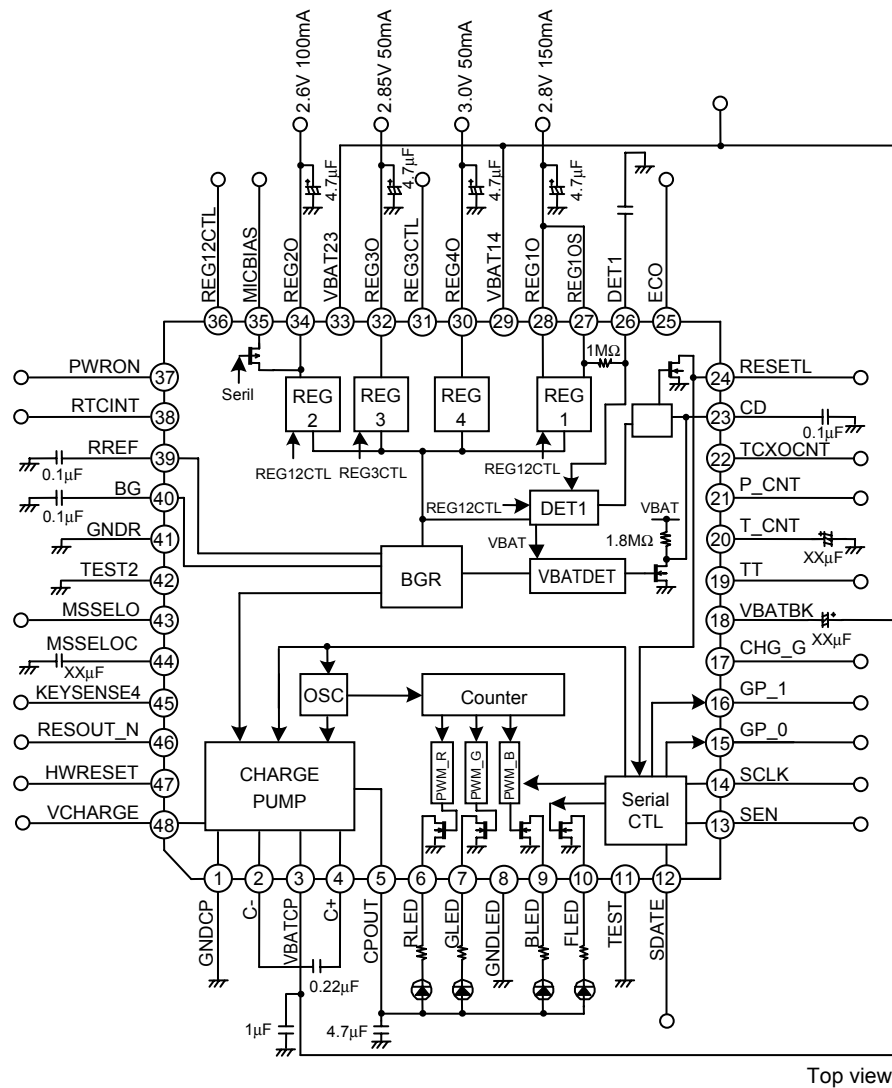

LV5105FN

Pin Table


No.	Pin symbol	Pin description	Input form	ESD element	
				VBAT	GND
1	GNDCP	Charge pump circuit ground pin	-	-	-
2	C ⁻	Flying capacitor connection pin	A	-	○
3	VBATCP	Charge pum circuit power pin	-	-	○
4	C ⁺	Flying capacitor connection pin	B	-	○
5	CPOUT	Charge pump output pin	C	-	○
6	RLED	RLED drive pin	D	-	○
7	GLED	GLED drive pin	D	-	○
8	GNDLED	LED drive circuit ground pin	-	-	-
9	BLED	RLED drive pin	D	-	○
10	FLED	FLED drive pin	D	-	○
11	TEST	Test input pin (Be sure to connect it to GND during normal use)	-	○	○
12	SDATA	Serial data signal input pin	E	○	○
13	SEN	Serial enable signal input pin	E	○	○
14	SCLK	Serial clock signal input pin	E	○	○
15	GP_0	Serially controllable output pin	F	○	○
16	GP_1	Serially controllable output pin	F	○	○
17	CHG_G	Power control logic circuit input pin	G	-	○
18	VBATBK	Power control logic circuit input pin	H	○	○
19	TT	Power control logic circuit output pin	I	○	○
20	T_CNT	Power control logic circuit output pin	J	○	○
21	P_CNT	Power control logic circuit output pin	I	○	○
22	TCXOCNT	Power control logic circuit input pin	H	○	○
23	CD	VBATDET delay capacitor connection pin	L	○	○
24	RESET	Reset output pin	M	○	○
25	ECO	ECO mode control pin L : ECO mode, H : Normal mode	G	○	○
26	DET1	DET1 delay capacitor connection pin	N	○	○
27	REG1OS	REG1 sense pin	O	○	○
28	REG1O	REG1 output pin	P	○	○
29	VBAT14	REG1, 4 circuit power pin	-	○	○
30	REG4O	REG4 output pin	Q	○	○
31	REG3CTL	REG3 control pin L : OFF, H : ON	G	○	○
32	REG3O	REG3 output pin	Q	○	○
33	VBAT23	REG2, 3 circuit power pin	-	○	○
34	REG2O	REG2 output pin	Q	○	○
35	MICBIAS	Mic bias output pin (serial control)	R	○	○
36	REG12CTL	REG1, 2 control pin L : OFF, H : ON	G	○	○
37	PWRON	Power control logic circuit input pin	H	○	○
38	RTCINT	Power control logic circuit input pin	S	○	○
39	RREF	Regulator reference pin	T	○	○
40	BG	BGR output pin	U	○	○
41	GNDR	Regulator circuit ground pin	-	-	-
42	TEST2	Test input pin (Be sure to connect it to GND during normal use)	-	-	-
43	MSSELO	Power control logic circuit input pin	V	○	○
44	MSSELOC	Power control logic circuit input pin	W	○	○
45	KEYSENCE4	Power control logic circuit input pin	S	○	○
46	RESOUT_N	Power control logic circuit input pin	X	○	○
47	HWRESET	Power control logic circuit input pin	K	○	○
48	VCHARG	VCHARGE voltage input pin	Y	-	○

LV5105FN

Pin Table

A	B	C	D	E
F	G	H	I	J
K	L	M	N	O
P	Q	R	S	T
U	V	W	X	Y

Power Control Block Diagram

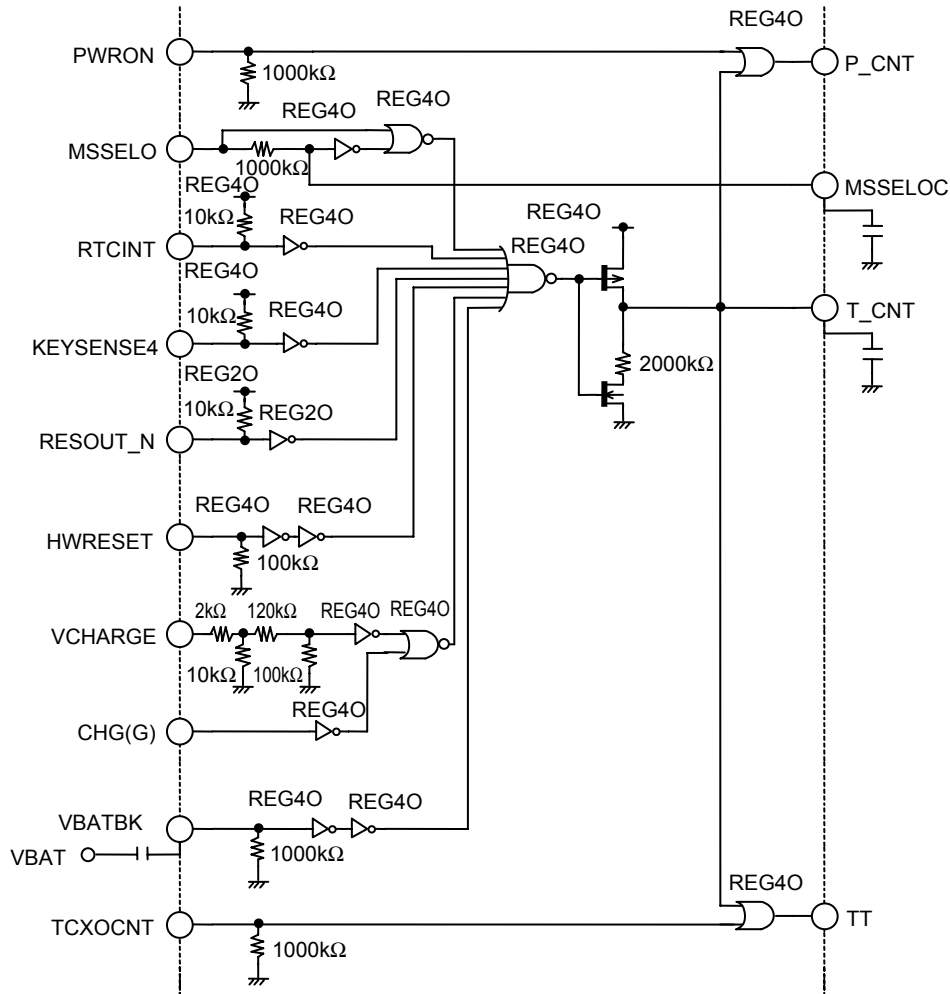

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of June, 2007. Specifications and information herein are subject to change without notice.