

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

MITSUBISHI MICROCOMPUTERS M37733MHLXXXHP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

DESCRIPTION

The M37733MHLXXXHP is a single-chip microcomputer using the 7700 Family core. This single-chip microcomputer has a CPU and a bus interface unit. The CPU is a 16-bit parallel processor that can be an 8-bit parallel processor, and the bus interface unit enhances the memory access efficiency to execute instructions fast. This microcomputer also includes a 32 kHz oscillation circuit, in addition to the ROM, RAM, multiple-function timers, serial I/O, A-D converter, and so on.

Its strong points are the low power dissipation, the low supply voltage, and the small package.

FEATURES

- Number of basic instructions 103
- Memory size ROM 124 Kbytes
 RAM 3968 bytes
- Instruction execution time
 The fastest instruction at 12 MHz frequency 333 ns
- Single power supply 2.7–5.5 V
- Low power dissipation (At 3 V supply voltage, 12 MHz frequency)
 9 mW (Typ.)


- Interrupts 19 types, 7 levels
- Multiple-function 16-bit timer 5 + 3
- Serial I/O (UART or clock synchronous) 3
- 10-bit A-D converter 8-channel inputs
- 12-bit watchdog timer
- Programmable input/output
 (ports P0, P1, P2, P3, P4, P5, P6, P7, P8) 68
- Clock generating circuit 2 circuits built-in
- Small package 80-pin plastic molded fine-pitch QFP
 (80P6D-A; 0.5 mm lead pitch)

APPLICATION

Control devices for general commercial equipment such as office automation, office equipment, personal information equipment, and so on.

Control devices for general industrial equipment such as communication equipment, and so on.

PIN CONFIGURATION (TOP VIEW)

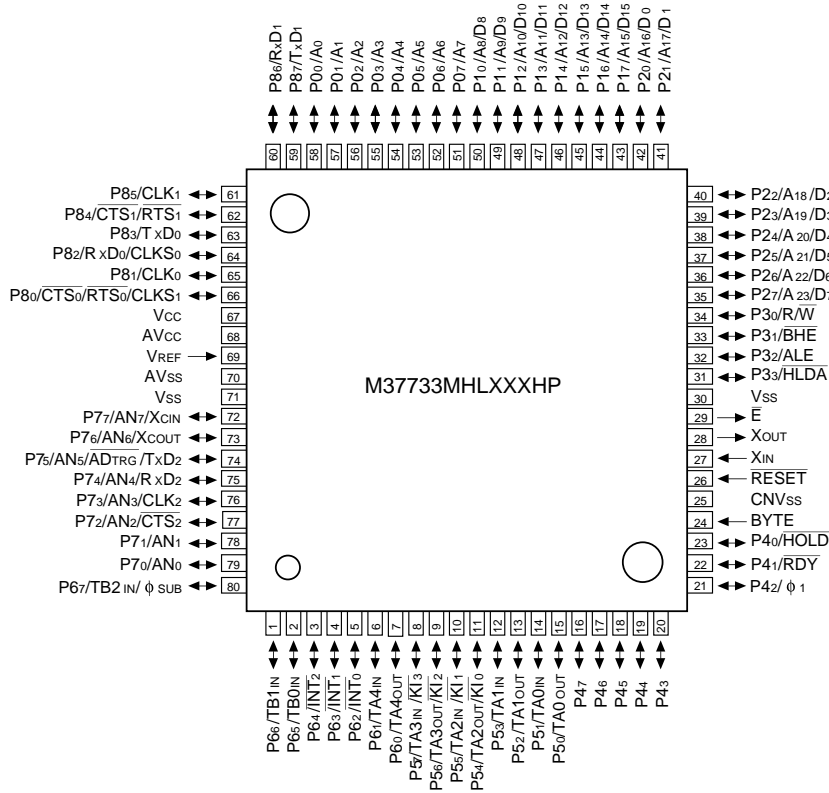


Outline 80P6D-A, 80P6Q-A

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

MITSUBISHI MICROCOMPUTERS
M37733MHLXXXHP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

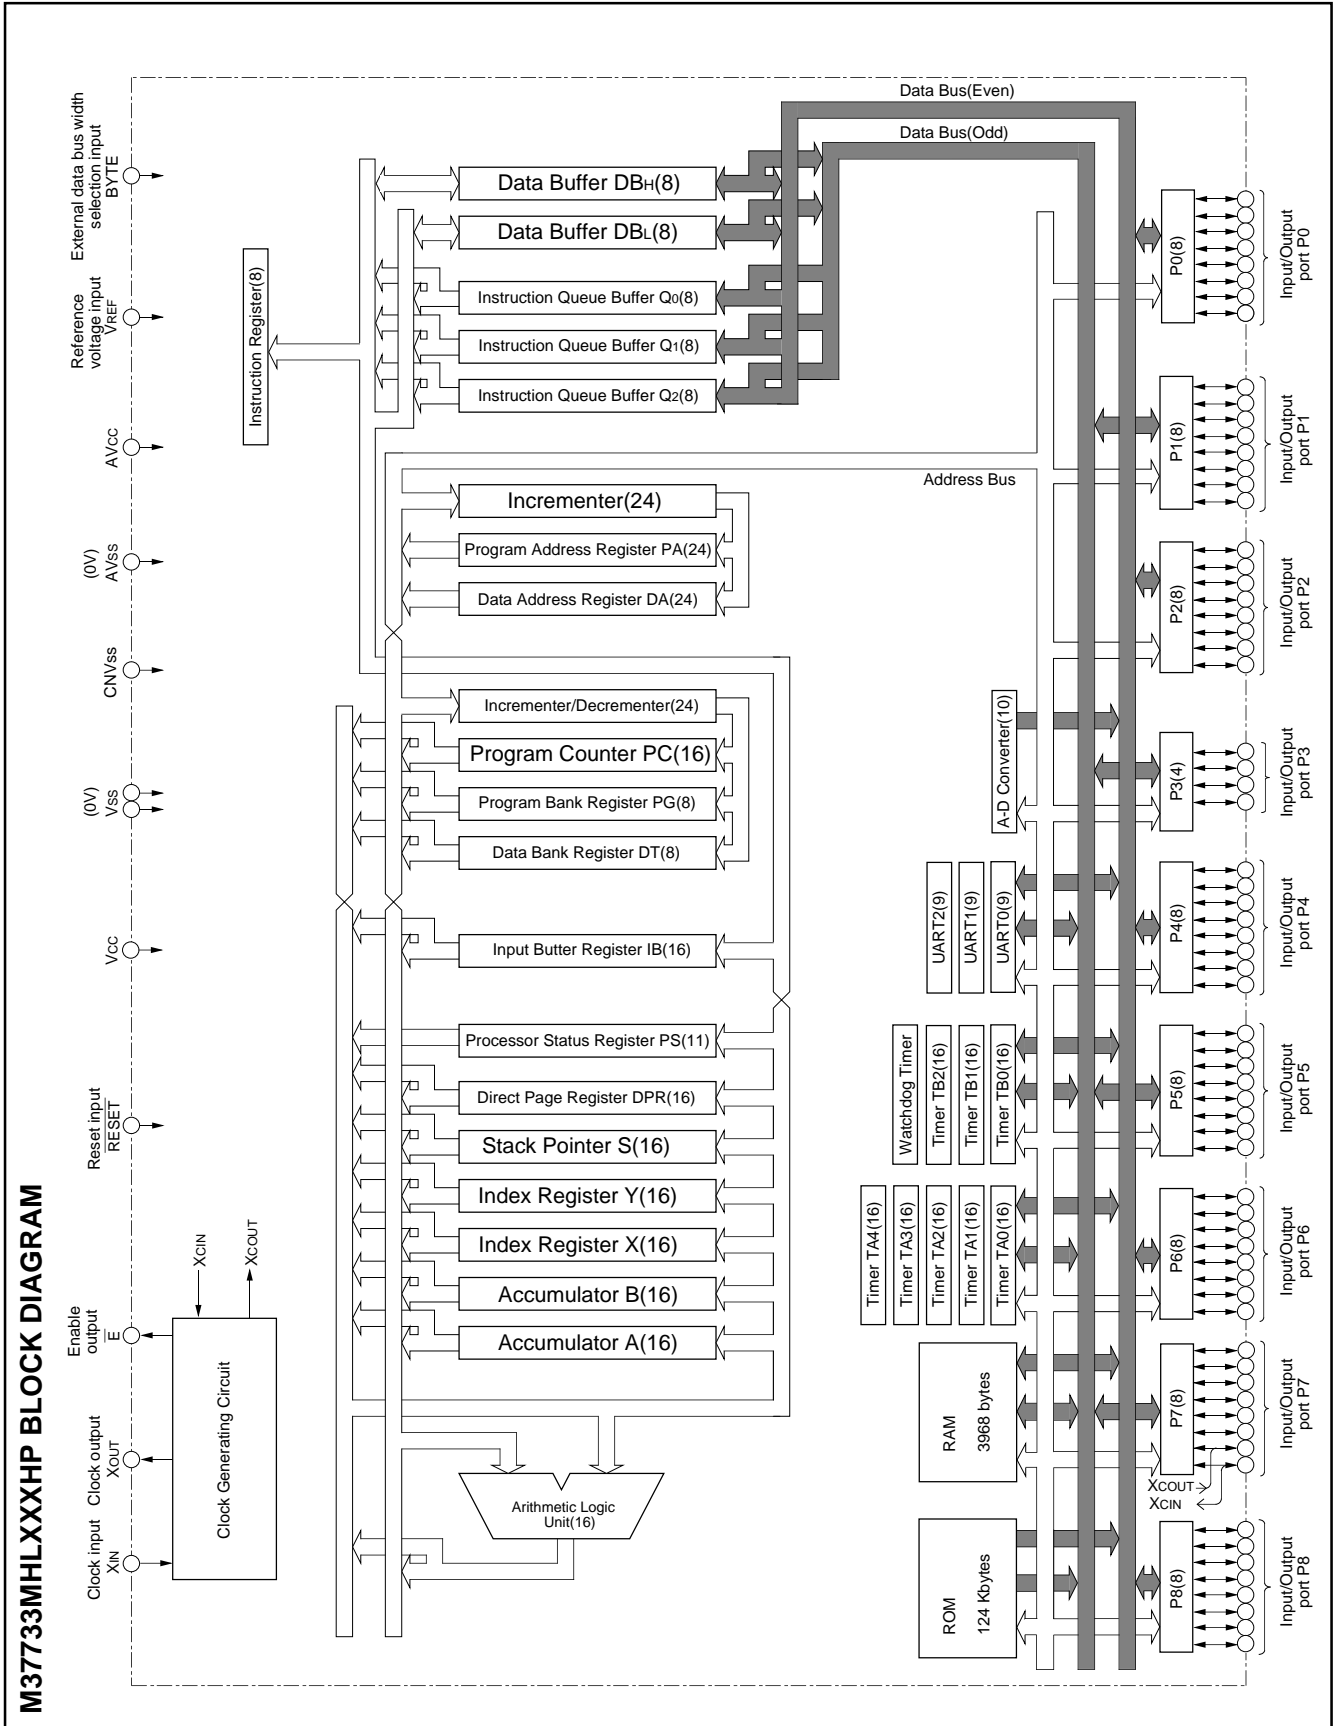

FUNCTIONS OF M37733MHLXXXHP

| Parameter | | Functions |
|------------------------------|-------------------------|---|
| Number of basic instructions | | 103 |
| Instruction execution time | | 333 ns (the fastest instruction at external clock 12 MHz frequency) |
| Memory size | ROM | 124 Kbytes |
| | RAM | 3968 bytes |
| Input/Output ports | P0 – P2, P4 – P8 | 8-bit X 8 |
| | P3 | 4-bit X 1 |
| Multi-function timers | TA0, TA1, TA2, TA3, TA4 | 16-bit X 5 |
| | TB0, TB1, TB2 | 16-bit X 3 |
| Serial I/O | | (UART or clock synchronous serial I/O) X 3 |
| A-D converter | | 10-bit X 1 (8 channels) |
| Watchdog timer | | 12-bit X 1 |
| Interrupts | | 3 external types, 16 internal types Each interrupt can be set to the priority level (0 – 7.) |
| Clock generating circuit | | 2 circuits built-in (externally connected to a ceramic resonator or a quartz-crystal oscillator) |
| Supply voltage | | 2.7 – 5.5 V |
| Power dissipation | | 9 mW (at 3 V supply voltage, external clock 12 MHz frequency) 22.5 mW (at 5 V supply voltage, external clock 12 MHz frequency) |
| Input/Output characteristic | Input/Output voltage | 5 V |
| | Output current | 5 mA |
| Memory expansion | | Maximum 16 Mbytes |
| Operating temperature range | | –40 to 85 °C |
| Device structure | | CMOS high-performance silicon gate process |
| Package | | 80-pin plastic molded fine-pitch QFP (80P6D-A;0.5 mm lead pitch) |

PIN DESCRIPTION

| Pin | Name | Input/Output | Functions |
|---------------|---|--------------|--|
| Vcc, Vss | Power source | | Apply 2.7 – 5.5 V to Vcc and 0 V to Vss. |
| CNVss | CNVss input | Input | This pin controls the processor mode. Connect to Vss for the single-chip mode and the memory expansion mode, and to Vcc for the microprocessor mode. |
| RESET | Reset input | Input | When "L" level is applied to this pin, the microcomputer enters the reset state. |
| XIN | Clock input | Input | These are pins of main-clock generating circuit. Connect a ceramic resonator or a quartz-crystal oscillator between XIN and XOUT. When an external clock is used, the clock source should be connected to the XIN pin, and the XOUT pin should be left open. |
| XOUT | Clock output | Output | |
| E | Enable output | Output | This pin functions as the enable signal output pin which indicates the access status in the internal bus. When output level of E signal is "L", data/instruction read or data write is performed. |
| BYTE | External data bus width selection input | Input | In the memory expansion mode or the microprocessor mode, this pin determines whether the external data bus has an 8-bit width or a 16-bit width. The data bus has a 16-bit width when "L" signal is input and an 8-bit width when "H" signal is input. |
| AVcc, AVss | Analog power source input | | Power source input pin for the A-D converter. Externally connect AVcc to Vcc and AVss to Vss. |
| VREF | Reference voltage input | Input | This is reference voltage input pin for the A-D converter. |
| P00 – P07 | I/O port P0 | I/O | In the single-chip mode, port P0 becomes an 8-bit I/O port. An I/O direction register is available so that each pin can be programmed for input or output. These ports are in the input mode when reset. In the memory expansion mode or the microprocessor mode, these pins output address (A0 – A7). |
| P10 – P17 | I/O port P1 | I/O | In the single-chip mode, these pins have the same functions as port P0. When the BYTE pin is set to "L" in the memory expansion mode or the microprocessor mode and external data bus has a 16-bit width, high-order data (D8 – D15) is input/output or an address (A8 – A15) is output. When the BYTE pin is "H" and an external data bus has an 8-bit width, only address (A8 – A15) is output. |
| P20 – P27 | I/O port P2 | I/O | In the single-chip mode, these pins have the same functions as port P0. In the memory expansion mode or the microprocessor mode, low-order data (D0 – D7) is input/output or an address (A16 – A23) is output. |
| P30 – P33 | I/O port P3 | I/O | In the single-chip mode, these pins have the same function as port P0. In the memory expansion mode or the microprocessor mode, R/W, BHE, ALE, and HLDA signals are output. |
| P40 – P47 | I/O port P4 | I/O | In the single-chip mode, these pins have the same functions as port P0. In the memory expansion mode or the microprocessor mode, P40, P41, and P42 become HOLD and RDY input pins, and a clock ϕ_1 output pin, respectively. Functions of the other pins are the same as in the single-chip mode. However, in the memory expansion mode, P42 can be selected as an I/O port. |
| P50 – P57 | I/O port P5 | I/O | In addition to having the same functions as port P0 in the single-chip mode, these pins also function as I/O pins for timers A0 to A3 and input pins for key input interrupt input ($\overline{KI}_0 - \overline{KI}_3$). |
| P60 – P67 | I/O port P6 | I/O | In addition to having the same functions as port P0 in the single-chip mode, these pins also function as I/O pins for timer A4, input pins for external interrupt input ($\overline{INT}_0 - \overline{INT}_2$) and input pins for timers B0 to B2. P67 also functions as sub-clock ϕ_{SUB} output pin. |
| P70 – P77 | I/O port P7 | I/O | In addition to having the same functions as port P0 in the single-chip mode, these pins function as input pins for A-D converter. P72 to P75 also function as I/O pins for UART2. Additionally, P76 and P77 have the function as the output pin (Xcout) and the input pin (Xcin) of the sub-clock (32 kHz) oscillation circuit, respectively. When P76 and P77 are used as the Xcout and Xcin pins, connect a resonator or an oscillator between the both. |
| P80 – P87 | I/O port P8 | I/O | In addition to having the same functions as port P0 in the single-chip mode, these pins also function as I/O pins for UART 0 and UART 1. |

BASIC FUNCTION BLOCKS

The M37733MHLXXXHP has the same functions as the M37733MHBXXXFP except for the package and the reset circuit. Refer to the section on the M37733MHBXXXFP.

RESET CIRCUIT

The microcomputer is released from the reset state when the RESET pin is returned to "H" level after holding it at "L" level with the power source voltage at 2.7 – 5.5 V. Program execution starts at the address formed by setting address A23 – A16 to 0016, A15 – A8 to the contents of address FFFF16, and A7 – A0 to the contents of address FFFE16. Figure 3 shows an example of a reset circuit. When the stabilized clock is input from the external to the main-clock oscillation circuit, the reset input voltage must be 0.55 V or less when the power source voltage reaches 2.7 V. When a resonator/oscillator is connected to the main-clock oscillation circuit, change the reset input voltage from "L" to "H" after the main-clock oscillation is fully stabilized.

The status of the internal registers during reset is the same as the M37733MHBXXXFP's.

ADDRESSING MODES

The M37733MHLXXXHP has 28 powerful addressing modes. Refer to the "7700 Family Software Manual" for the details.

MACHINE INSTRUCTION LIST

The M37733MHLXXXHP has 103 machine instructions. Refer to the "7700 Family Software Manual" for the details.

DATA REQUIRED FOR MASK ROM ORDERING

Please send the following data for mask orders.

- (1) M37733MHLXXXHP mask ROM order confirmation form
- (2) 80P6D, 80P6Q mark specification form
- (3) ROM data (EPROM 3 sets)

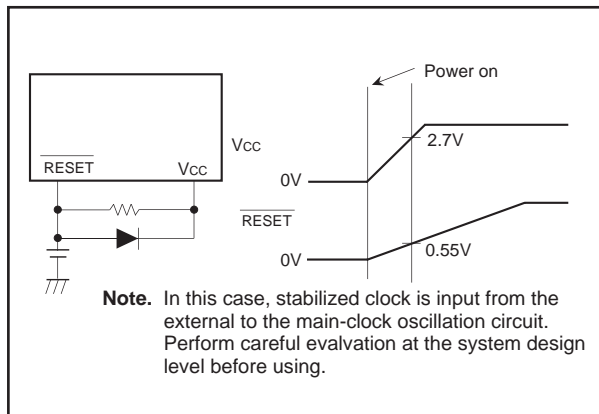


Fig. 1 Example of a reset circuit

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Conditions | Ratings | Unit |
|------------------|--|------------------------|-------------------------------|------|
| V _{cc} | Power source voltage | | -0.3 to +7 | V |
| AV _{cc} | Analog power source voltage | | -0.3 to +7 | V |
| V _i | Input voltage RESET, CNV _{ss} , BYTE | | -0.3 to +12 | V |
| V _i | Input voltage P00 – P07, P10 – P17, P20 – P27, P30 – P33, P40 – P47, P50 – P57, P60 – P67, P70 – P77, P80 – P87, VREF, X _{IN} | | -0.3 to V _{cc} + 0.3 | V |
| V _o | Output voltage P00 – P07, P10 – P17, P20 – P27, P30 – P33, P40 – P47, P50 – P57, P60 – P67, P70 – P77, P80 – P87, X _{OUT} , E | | -0.3 to V _{cc} + 0.3 | V |
| P _d | Power dissipation | T _a = 25 °C | 200 | mW |
| T _{opr} | Operating temperature | | -40 to +85 | °C |
| T _{stg} | Storage temperature | | -65 to +150 | °C |

RECOMMENDED OPERATING CONDITIONS (V_{cc} = 5 V ± 10%, T_a = -40 to +85 °C, unless otherwise noted)

| Symbol | Parameter | Limits | | | Unit | |
|-----------------------|--|--|-----------------|---------------------|------|---|
| | | Min. | Typ. | Max. | | |
| V _{cc} | Power source voltage | f(X _{IN}) : Operating | 2.7 | | 5.5 | V |
| | | f(X _{IN}) : Stopped, f(X _{CIN}) = 32.768 kHz | 2.7 | | 5.5 | |
| AV _{cc} | Analog power source voltage | | V _{cc} | | V | |
| V _{ss} | Power source voltage | | 0 | | V | |
| AV _{ss} | Analog power source voltage | | 0 | | V | |
| V _{IH} | High-level input voltage P00 – P07, P30 – P33, P40 – P47, P50 – P57, P60 – P67, P70 – P77, P80 – P87, X _{IN} , RESET, CNV _{ss} , BYTE, X _{CIN} (Note 3) | 0.8 V _{cc} | | V _{cc} | V | |
| V _{IH} | High-level input voltage P10 – P17, P20 – P27 (in single-chip mode) | 0.8 V _{cc} | | V _{cc} | V | |
| V _{IH} | High-level input voltage P10 – P17, P20 – P27 (in memory expansion mode and microprocessor mode) | 0.5 V _{cc} | | V _{cc} | V | |
| V _{IL} | Low-level input voltage P00 – P07, P30 – P33, P40 – P47, P50 – P57, P60 – P67, P70 – P77, P80 – P87, X _{IN} , RESET, CNV _{ss} , BYTE, X _{CIN} (Note 3) | 0 | | 0.2V _{cc} | V | |
| V _{IL} | Low-level input voltage P10 – P17, P20 – P27 (in single-chip mode) | 0 | | 0.2V _{cc} | V | |
| V _{IL} | Low-level input voltage P10 – P17, P20 – P27 (in memory expansion mode and microprocessor mode) | 0 | | 0.16V _{cc} | V | |
| I _{OH(peak)} | High-level peak output current P00 – P07, P10 – P17, P20 – P27, P30 – P33, P40 – P47, P50 – P57, P60 – P67, P70 – P77, P80 – P87 | | | -10 | mA | |
| I _{OH(avg)} | High-level average output current P00 – P07, P10 – P17, P20 – P27, P30 – P33, P40 – P47, P50 – P57, P60 – P67, P70 – P77, P80 – P87 | | | -5 | mA | |
| I _{OL(peak)} | Low-level peak output current P00 – P07, P10 – P17, P20 – P27, P30 – P33, P40 – P43, P54 – P57, P60 – P67, P70 – P77, P80 – P87 | | | 10 | mA | |
| I _{OL(peak)} | Low-level peak output current P44 – P47, P50 – P53 | | | 16 | mA | |
| I _{OL(avg)} | Low-level average output current P00 – P07, P10 – P17, P20 – P27, P30 – P33, P40 – P43, P54 – P57, P60 – P67, P70 – P77, P80 – P87 | | | 5 | mA | |
| I _{OL(avg)} | Low-level average output current P44 – P47, P50 – P53 | | | 12 | mA | |
| f(X _{IN}) | Main-clock oscillation frequency (Note 4) | | | 12 | MHz | |
| f(X _{CIN}) | Sub-clock oscillation frequency | | 32.768 | 50 | kHz | |

- Notes**
1. Average output current is the average value of a 100 ms interval.
 2. The sum of I_{OL(peak)} for ports P0, P1, P2, P3, and P8 must be 80 mA or less, the sum of I_{OH(peak)} for ports P0, P1, P2, P3, and P8 must be 80 mA or less, the sum of I_{OL(peak)} for ports P4, P5, P6, and P7 must be 100 mA or less, and the sum of I_{OH(peak)} for ports P4, P5, P6, and P7 must be 80 mA or less.
 3. Limits V_{IH} and V_{IL} for X_{CIN} are applied when the sub clock external input selection bit = "1".
 4. The maximum value of f(X_{IN}) = 6 MHz when the main clock division selection bit = "1".

ELECTRICAL CHARACTERISTICS ($V_{CC} = 5\text{ V}$, $V_{SS} = 0\text{ V}$, $T_a = -40\text{ to }+85\text{ }^\circ\text{C}$, $f(X_{IN}) = 12\text{ MHz}$, unless otherwise noted)

| Symbol | Parameter | Test conditions | Limits | | | Unit | |
|-----------------------------------|--|---|-----------------------|-------|-------|---------|---------|
| | | | Min. | Typ. | Max. | | |
| V _{OH} | High-level output voltage P00 – P07, P10 – P17, P20 – P27, P33, P40 – P47, P50 – P57, P60 – P67, P70 – P77, P80 – P87 | V _{CC} = 5 V, I _{OH} = –10 mA | 3 | | | V | |
| | | V _{CC} = 3 V, I _{OH} = –1 mA | 2.5 | | | | |
| V _{OH} | High-level output voltage P00 – P07, P10 – P17, P20 – P27, P33 | V _{CC} = 5 V, I _{OH} = –400 μ A | 4.7 | | | V | |
| V _{OH} | High-level output voltage P30 – P32 | V _{CC} = 5 V, I _{OH} = –10 mA | 3.1 | | | V | |
| | | V _{CC} = 5 V, I _{OH} = –400 μ A | 4.8 | | | | |
| | | V _{CC} = 3 V, I _{OH} = –1 mA | 2.6 | | | | |
| V _{OH} | High-level output voltage \bar{E} | V _{CC} = 5 V, I _{OH} = –10 mA | 3.4 | | | V | |
| | | V _{CC} = 5 V, I _{OH} = –400 μ A | 4.8 | | | | |
| | | V _{CC} = 3 V, I _{OH} = –1 mA | 2.6 | | | | |
| V _{OL} | Low-level output voltage P00 – P07, P10 – P17, P20 – P27, P33, P40 – P43, P54 – P57, P60 – P67, P70 – P77, P80 – P87 | V _{CC} = 5 V, I _{OL} = 10 mA | | | 2 | V | |
| | | V _{CC} = 3 V, I _{OL} = 1 mA | | | 0.5 | | |
| V _{OL} | Low-level output voltage P44 – P47, P50 – P53 | V _{CC} = 5 V, I _{OL} = 16 mA | | | 1.8 | V | |
| | | V _{CC} = 3 V, I _{OL} = 10 mA | | | 1.5 | | |
| V _{OL} | Low-level output voltage P00 – P07, P10 – P17, P20 – P27, P33 | V _{CC} = 5 V, I _{OL} = 2 mA | | | 0.45 | V | |
| V _{OL} | Low-level output voltage P30 – P32 | V _{CC} = 5 V, I _{OL} = 10 mA | | | 1.9 | V | |
| | | V _{CC} = 5 V, I _{OL} = 2 mA | | | 0.43 | | |
| | | V _{CC} = 3 V, I _{OL} = 1 mA | | | 0.4 | | |
| V _{OL} | Low-level output voltage \bar{E} | V _{CC} = 5 V, I _{OL} = 10 mA | | | 1.6 | V | |
| | | V _{CC} = 5 V, I _{OL} = 2 mA | | | 0.4 | | |
| | | V _{CC} = 3 V, I _{OL} = 1 mA | | | 0.4 | | |
| V _{T+} – V _{T–} | Hysteresis $\overline{\text{HOLD}}$, $\overline{\text{RDY}}$, TA0IN – TA4IN, TB0IN – TB2IN, INT0 – INT2, ADTRG, $\overline{\text{CTS0}}$, $\overline{\text{CTS1}}$, $\overline{\text{CTS2}}$, CLK0, CLK1, CLK2, $\overline{\text{K10}}$ – $\overline{\text{K13}}$ | V _{CC} = 5 V | 0.4 | | 1 | V | |
| | | V _{CC} = 3 V | 0.1 | | 0.7 | | |
| V _{T+} – V _{T–} | Hysteresis $\overline{\text{RESET}}$ | V _{CC} = 5 V | 0.2 | | 0.5 | V | |
| | | V _{CC} = 3 V | 0.1 | | 0.4 | | |
| V _{T+} – V _{T–} | Hysteresis X _{IN} | V _{CC} = 5 V | 0.1 | | 0.4 | V | |
| | | V _{CC} = 3 V | 0.06 | | 0.26 | | |
| V _{T+} – V _{T–} | Hysteresis X _{CIN} (When external clock is input) | V _{CC} = 5 V | 0.1 | | 0.4 | V | |
| | | V _{CC} = 3 V | 0.06 | | 0.26 | | |
| I _{IH} | High-level input current P00 – P07, P10 – P17, P20 – P27, P30 – P33, P40 – P47, P50 – P57, P60 – P67, P70 – P77, P80 – P87, X _{IN} , $\overline{\text{RESET}}$, CNV _{SS} , BYTE | V _{CC} = 5 V, V _I = 5 V | | | 5 | μ A | |
| | | V _{CC} = 3 V, V _I = 3 V | | | 4 | | |
| I _{IL} | Low-level input current P00 – P07, P10 – P17, P20 – P27, P30 – P33, P40 – P47, P50 – P53, P60, P61, P65 – P67, P70 – P77, P80 – P87, X _{IN} , $\overline{\text{RESET}}$, CNV _{SS} , BYTE | V _{CC} = 5 V, V _I = 0 V | | | –5 | μ A | |
| | | V _{CC} = 3 V, V _I = 0 V | | | –4 | | |
| I _{IL} | Low-level input current P54 – P57, P62 – P64 | V _I = 0 V, without a pull-up transistor | V _{CC} = 5 V | | | –5 | μ A |
| | | | V _{CC} = 3 V | | | –4 | |
| | | V _I = 0 V, with a pull-up transistor | V _{CC} = 5 V | –0.25 | –0.5 | –1.0 | mA |
| | | | V _{CC} = 3 V | –0.08 | –0.18 | –0.35 | |
| V _{RAM} | RAM hold voltage | When clock is stopped. | 2 | | | V | |

ELECTRICAL CHARACTERISTICS ($V_{CC} = 5\text{ V}$, $V_{SS} = 0\text{ V}$, $T_a = -40\text{ to }+85\text{ }^\circ\text{C}$, unless otherwise noted)

| Symbol | Parameter | Test conditions | Limits | | | Unit | | |
|-----------------|----------------------|---|---|------|------|------|----|----|
| | | | Min. | Typ. | Max. | | | |
| I _{CC} | Power source current | When single-chip mode, output pins are open, and other pins are V _{SS} . | V _{CC} = 5 V, f(X _{IN}) = 12 MHz (square waveform), f(f ₂) = 6 MHz, f(X _{CIN}) = 32.768 kHz, in operating (Note 1) | | 4.5 | 9 | mA | |
| | | | V _{CC} = 3 V, f(X _{IN}) = 12 MHz (square waveform), f(f ₂) = 6 MHz, f(X _{CIN}) = 32.768 kHz, in operating (Note 1) | | 3 | 6 | mA | |
| | | | V _{CC} = 3 V, f(X _{IN}) = 12 MHz (square waveform), f(f ₂) = 0.75 MHz, f(X _{CIN}) : Stopped, in operating | | 0.4 | 0.8 | mA | |
| | | | V _{CC} = 3 V, f(X _{IN}) = 12 MHz (square waveform), f(X _{CIN}) = 32.768 kHz, when a WIT instruction is executed (Note 2) | | 6 | 12 | μA | |
| | | | V _{CC} = 3 V, f(X _{IN}) : Stopped, f(X _{CIN}) = 32.768 kHz, in operating (Note 3) | | 30 | 60 | μA | |
| | | | V _{CC} = 3 V, f(X _{IN}) : Stopped, f(X _{CIN}) = 32.768 kHz, when a WIT instruction is executed (Note 4) | | 3 | 6 | μA | |
| | | | T _a = 25 °C, when clock is stopped | | | | 1 | μA |
| | | | T _a = 85 °C, when clock is stopped | | | | 20 | μA |

- Notes 1.** This applies when the main clock external input selection bit = "1", the main clock division selection bit = "0", and the signal output stop bit = "1".
- 2.** This applies when the main clock external input selection bit = "1" and the system clock stop bit at wait state = "1".
- 3.** This applies when CPU and the clock timer are operating with the sub clock (32.768 kHz) selected as the system clock.
- 4.** This applies when the X_{COUT} drivability selection bit = "0" and the system clock stop bit at wait state = "1".

A–D CONVERTER CHARACTERISTICS

($V_{CC} = AV_{CC} = 5\text{ V}$, $V_{SS} = AV_{SS} = 0\text{ V}$, $T_a = -40\text{ to }+85\text{ }^\circ\text{C}$, $f(X_{IN}) = 12\text{ MHz}$, unless otherwise noted (Note))

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|-------------------|----------------------|------------------------------------|--------|------|------------------|------|
| | | | Min. | Typ. | Max. | |
| — | Resolution | V _{REF} = V _{CC} | | | 10 | Bits |
| — | Absolute accuracy | V _{REF} = V _{CC} | | | ± 3 | LSB |
| RLADDER | Ladder resistance | V _{REF} = V _{CC} | 10 | | 25 | kΩ |
| t _{CONV} | Conversion time | | 19.6 | | | μs |
| V _{REF} | Reference voltage | | 2.7 | | V _{CC} | V |
| V _{IA} | Analog input voltage | | 0 | | V _{REF} | V |

Note. This applies when the main clock division selection bit = "0" and f(f₂) = 6 MHz.

TIMING REQUIREMENTS ($V_{CC} = 2.7 - 5.5$ V, $V_{SS} = 0$ V, $T_a = -40$ to $+85$ °C, $f(X_{IN}) = 12$ MHz, unless otherwise noted (Note 1))

Notes 1. This applies when the main clock division selection bit = "0" and $f(f_2) = 6$ MHz.

2. Input signal's rise/fall time must be 100 ns or less, unless otherwise noted.

External clock input

| Symbol | Parameter | Limits | | Unit |
|------------|--|--------|------|------|
| | | Min. | Max. | |
| t_c | External clock input cycle time (Note 1) | 83 | | ns |
| $t_{w(H)}$ | External clock input high-level pulse width (Note 2) | 33 | | ns |
| $t_{w(L)}$ | External clock input low-level pulse width (Note 2) | 33 | | ns |
| t_r | External clock rise time | | 15 | ns |
| t_f | External clock fall time | | 15 | ns |

Notes 1. When the main clock division selection bit = "1", the minimum value of $t_c = 166$ ns.

2. When the main clock division selection bit = "1", values of $t_{w(H)} / t_c$ and $t_{w(L)} / t_c$ must be set to values from 0.45 through 0.55.

Single-chip mode

| Symbol | Parameter | Limits | | Unit |
|-----------------|--------------------------|--------|------|------|
| | | Min. | Max. | |
| $t_{su}(P0D-E)$ | Port P0 input setup time | 200 | | ns |
| $t_{su}(P1D-E)$ | Port P1 input setup time | 200 | | ns |
| $t_{su}(P2D-E)$ | Port P2 input setup time | 200 | | ns |
| $t_{su}(P3D-E)$ | Port P3 input setup time | 200 | | ns |
| $t_{su}(P4D-E)$ | Port P4 input setup time | 200 | | ns |
| $t_{su}(P5D-E)$ | Port P5 input setup time | 200 | | ns |
| $t_{su}(P6D-E)$ | Port P6 input setup time | 200 | | ns |
| $t_{su}(P7D-E)$ | Port P7 input setup time | 200 | | ns |
| $t_{su}(P8D-E)$ | Port P8 input setup time | 200 | | ns |
| $t_{h(E-P0D)}$ | Port P0 input hold time | 0 | | ns |
| $t_{h(E-P1D)}$ | Port P1 input hold time | 0 | | ns |
| $t_{h(E-P2D)}$ | Port P2 input hold time | 0 | | ns |
| $t_{h(E-P3D)}$ | Port P3 input hold time | 0 | | ns |
| $t_{h(E-P4D)}$ | Port P4 input hold time | 0 | | ns |
| $t_{h(E-P5D)}$ | Port P5 input hold time | 0 | | ns |
| $t_{h(E-P6D)}$ | Port P6 input hold time | 0 | | ns |
| $t_{h(E-P7D)}$ | Port P7 input hold time | 0 | | ns |
| $t_{h(E-P8D)}$ | Port P8 input hold time | 0 | | ns |

Memory expansion mode and microprocessor mode

| Symbol | Parameter | Limits | | Unit |
|-----------------------|-----------------------|--------|------|------|
| | | Min. | Max. | |
| $t_{su}(D-E)$ | Data input setup time | 50 | | ns |
| $t_{su}(RDY-\phi_1)$ | RDY input setup time | 80 | | ns |
| $t_{su}(HOLD-\phi_1)$ | HOLD input setup time | 80 | | ns |
| $t_{h(E-D)}$ | Data input hold time | 0 | | ns |
| $t_{h}(\phi_1-RDY)$ | RDY input hold time | 0 | | ns |
| $t_{h}(\phi_1-HOLD)$ | HOLD input hold time | 0 | | ns |

Timer A input (Count input in event counter mode)

| Symbol | Parameter | Limits | | Unit |
|---------------------|------------------------------------|--------|------|------|
| | | Min. | Max. | |
| t _{c(TA)} | TAiIN input cycle time | 250 | | ns |
| t _{w(TAH)} | TAiIN input high-level pulse width | 125 | | ns |
| t _{w(TAL)} | TAiIN input low-level pulse width | 125 | | ns |

Timer A input (Gating input in timer mode)

| Symbol | Parameter | Limits | | Unit |
|---------------------|---|--------|------|------|
| | | Min. | Max. | |
| t _{c(TA)} | TAiIN input cycle time (Note) | 666 | | ns |
| t _{w(TAH)} | TAiIN input high-level pulse width (Note) | 333 | | ns |
| t _{w(TAL)} | TAiIN input low-level pulse width (Note) | 333 | | ns |

Note. Limits change depending on f(X_{IN}). Refer to "DATA FORMULAS".

Timer A input (External trigger input in one-shot pulse mode)

| Symbol | Parameter | Limits | | Unit |
|---------------------|------------------------------------|--------|------|------|
| | | Min. | Max. | |
| t _{c(TA)} | TAiIN input cycle time (Note) | 666 | | ns |
| t _{w(TAH)} | TAiIN input high-level pulse width | 166 | | ns |
| t _{w(TAL)} | TAiIN input low-level pulse width | 166 | | ns |

Note. Limits change depending on f(X_{IN}). Refer to "DATA FORMULAS".

Timer A input (External trigger input in pulse width modulation mode)

| Symbol | Parameter | Limits | | Unit |
|---------------------|------------------------------------|--------|------|------|
| | | Min. | Max. | |
| t _{w(TAH)} | TAiIN input high-level pulse width | 166 | | ns |
| t _{w(TAL)} | TAiIN input low-level pulse width | 166 | | ns |

Timer A input (Up-down input in event counter mode)

| Symbol | Parameter | Limits | | Unit |
|-------------------------|-------------------------------------|--------|------|------|
| | | Min. | Max. | |
| t _{c(UP)} | TAiOUT input cycle time | 3333 | | ns |
| t _{w(UPH)} | TAiOUT input high-level pulse width | 1666 | | ns |
| t _{w(UPL)} | TAiOUT input low-level pulse width | 1666 | | ns |
| t _{su(UP-TiN)} | TAiOUT input setup time | 666 | | ns |
| t _{h(TiN-UP)} | TAiOUT input hold time | 666 | | ns |

Timer A input (Two-phase pulse input in event counter mode)

| Symbol | Parameter | Limits | | Unit |
|-------------------------------|-------------------------|--------|------|------|
| | | Min. | Max. | |
| t _{c(TA)} | TAjIN input cycle time | 2000 | | ns |
| t _{su(TAjIN-TAjOUT)} | TAjIN input setup time | 500 | | ns |
| t _{su(TAjOUT-TAjIN)} | TAjOUT input setup time | 500 | | ns |

Timer B input (Count input in event counter mode)

| Symbol | Parameter | Limits | | Unit |
|--------------|---|--------|------|------|
| | | Min. | Max. | |
| $t_{c(TB)}$ | TBiIN input cycle time (one edge count) | 250 | | ns |
| $t_{w(TBH)}$ | TBiIN input high-level pulse width (one edge count) | 125 | | ns |
| $t_{w(TBL)}$ | TBiIN input low-level pulse width (one edge count) | 125 | | ns |
| $t_{c(TB)}$ | TBiIN input cycle time (both edges count) | 500 | | ns |
| $t_{w(TBH)}$ | TBiIN input high-level pulse width (both edges count) | 250 | | ns |
| $t_{w(TBL)}$ | TBiIN input low-level pulse width (both edges count) | 250 | | ns |

Timer B input (Pulse period measurement mode)

| Symbol | Parameter | Limits | | Unit |
|--------------|---|--------|------|------|
| | | Min. | Max. | |
| $t_{c(TB)}$ | TBiIN input cycle time (Note) | 666 | | ns |
| $t_{w(TBH)}$ | TBiIN input high-level pulse width (Note) | 333 | | ns |
| $t_{w(TBL)}$ | TBiIN input low-level pulse width (Note) | 333 | | ns |

Note. Limits change depending on $f(X_{IN})$. Refer to "DATA FORMULAS".

Timer B input (Pulse width measurement mode)

| Symbol | Parameter | Limits | | Unit |
|--------------|---|--------|------|------|
| | | Min. | Max. | |
| $t_{c(TB)}$ | TBiIN input cycle time (Note) | 666 | | ns |
| $t_{w(TBH)}$ | TBiIN input high-level pulse width (Note) | 333 | | ns |
| $t_{w(TBL)}$ | TBiIN input low-level pulse width (Note) | 333 | | ns |

Note. Limits change depending on $f(X_{IN})$. Refer to "DATA FORMULAS".

A-D trigger input

| Symbol | Parameter | Limits | | Unit |
|--------------|--|--------|------|------|
| | | Min. | Max. | |
| $t_{c(AD)}$ | ADTRG input cycle time (minimum allowable trigger) | 1333 | | ns |
| $t_{w(ADL)}$ | ADTRG input low-level pulse width | 166 | | ns |

Serial I/O

| Symbol | Parameter | Limits | | Unit |
|---------------|-----------------------------------|--------|------|------|
| | | Min. | Max. | |
| $t_{c(CK)}$ | CLKi input cycle time | 333 | | ns |
| $t_{w(CKH)}$ | CLKi input high-level pulse width | 166 | | ns |
| $t_{w(CKL)}$ | CLKi input low-level pulse width | 166 | | ns |
| $t_{d(C-Q)}$ | TxDi output delay time | | 100 | ns |
| $t_{h(C-Q)}$ | TxDi hold time | 0 | | ns |
| $t_{su(D-C)}$ | RxDi input setup time | 65 | | ns |
| $t_{h(C-D)}$ | RxDi input hold time | 75 | | ns |

External interrupt \overline{INT}_i input, key input interrupt \overline{KI}_i input

| Symbol | Parameter | Limits | | Unit |
|--------------|---|--------|------|------|
| | | Min. | Max. | |
| $t_{w(INH)}$ | \overline{INT}_i input high-level pulse width | 250 | | ns |
| $t_{w(INL)}$ | \overline{INT}_i input low-level pulse width | 250 | | ns |
| $t_{w(KIL)}$ | \overline{KI}_i input low-level pulse width | 250 | | ns |

DATA FORMULAS

Timer A input (Gating input in timer mode)

| Symbol | Parameter | Limits | | Unit |
|-------------|------------------------------------|--|------|------|
| | | Min. | Max. | |
| $t_{c(TA)}$ | TAiIn input cycle time | $\frac{8 \times 10^9}{2 \cdot f(f_2)}$ | | ns |
| $t_w(TAH)$ | TAiIn input high-level pulse width | $\frac{4 \times 10^9}{2 \cdot f(f_2)}$ | | ns |
| $t_w(TAL)$ | TAiIn input low-level pulse width | $\frac{4 \times 10^9}{2 \cdot f(f_2)}$ | | ns |

Timer A input (External trigger input in one-shot pulse mode)

| Symbol | Parameter | Limits | | Unit |
|-------------|------------------------|--|------|------|
| | | Min. | Max. | |
| $t_{c(TA)}$ | TAiIn input cycle time | $\frac{8 \times 10^9}{2 \cdot f(f_2)}$ | | ns |

Timer B input (In pulse period measurement mode or pulse width measurement mode)

| Symbol | Parameter | Limits | | Unit |
|-------------|------------------------------------|--|------|------|
| | | Min. | Max. | |
| $t_{c(TB)}$ | TBiIn input cycle time | $\frac{8 \times 10^9}{2 \cdot f(f_2)}$ | | ns |
| $t_w(TBH)$ | TBiIn input high-level pulse width | $\frac{4 \times 10^9}{2 \cdot f(f_2)}$ | | ns |
| $t_w(TBL)$ | TBiIn input low-level pulse width | $\frac{4 \times 10^9}{2 \cdot f(f_2)}$ | | ns |

Note. $f(f_2)$ represents the clock f_2 frequency.

For the relation to the main clock and sub clock, refer to Table 9 in data sheet "M37733MHBXXXFP".

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

SWITCHING CHARACTERISTICS

($V_{CC} = 2.7 - 5.5 V$, $V_{SS} = 0 V$, $T_a = -40$ to $+85^\circ C$, $f(XIN) = 12 MHz$, unless otherwise noted (Note))

Single-chip mode

| Symbol | Parameter | Test conditions | Limits | | Unit |
|--------------|--------------------------------|-----------------|--------|------|------|
| | | | Min. | Max. | |
| $t_d(E-P0Q)$ | Port P0 data output delay time | Fig. 2 | | 300 | ns |
| $t_d(E-P1Q)$ | Port P1 data output delay time | | | 300 | ns |
| $t_d(E-P2Q)$ | Port P2 data output delay time | | | 300 | ns |
| $t_d(E-P3Q)$ | Port P3 data output delay time | | | 300 | ns |
| $t_d(E-P4Q)$ | Port P4 data output delay time | | | 300 | ns |
| $t_d(E-P5Q)$ | Port P5 data output delay time | | | 300 | ns |
| $t_d(E-P6Q)$ | Port P6 data output delay time | | | 300 | ns |
| $t_d(E-P7Q)$ | Port P7 data output delay time | | | 300 | ns |
| $t_d(E-P8Q)$ | Port P8 data output delay time | | | 300 | ns |

Note. This applies when the main clock division selection bit = "0" and $f(f_2) = 6 MHz$.

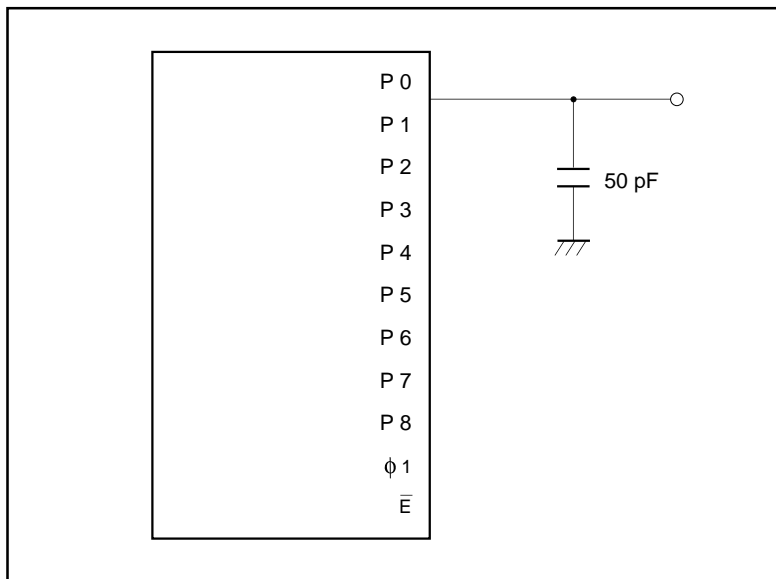


Fig. 2 Measuring circuit for ports P0 – P8 and $\phi 1$

Memory expansion mode and microprocessor mode

(V_{CC} = 2.7 – 5.5 V, V_{SS} = 0 V, T_a = –40 to +85°C, f(X_{IN}) = 12 MHz (Note 1), unless otherwise noted)

| Symbol | Parameter | (Note 2) Wait mode | Test conditions | Limits | | Unit |
|--------------------------|----------------------------------|-----------------------|-----------------|--------|------|------|
| | | | | Min. | Max. | |
| td(A _n –E) | Address output delay time | No wait | Fig. 2 | 20 | | ns |
| | | Wait 1 | | | | |
| | | Wait 0 | | 182 | | ns |
| td(A–E) | Address output delay time | No wait | | 20 | | ns |
| | | Wait 1 | | | | |
| | | Wait 0 | | 162 | | ns |
| th(E–A _n) | Address hold time | | | 40 | | ns |
| tw(ALE) | ALE pulse width | No wait | | 40 | | ns |
| | | Wait 1 | | | | |
| | | Wait 0 | | 123 | | ns |
| tsu(A–ALE) | Address output set up time | No wait | | 10 | | ns |
| | | Wait 1 | | | | |
| | | Wait 0 | | 93 | | ns |
| th(ALE–A) | Address hold time | No wait | | 9 | | ns |
| | | Wait 1 | | | | |
| | | Wait 0 | 40 | | ns | |
| td(ALE–E) | ALE output delay time | No wait | 4 | | ns | |
| | | Wait 1 | | | | |
| | | Wait 0 | 40 | | ns | |
| td(E–DQ) | Data output delay time | | | 90 | ns | |
| th(E–DQ) | Data hold time | | | 40 | ns | |
| tw(EL) | E pulse width | No wait | 131 | | ns | |
| | | Wait 1 | | | | |
| | | Wait 0 | 298 | | ns | |
| tpxz(E–DZ) | Floating start delay time | | | 10 | ns | |
| tpzx(E–DZ) | Floating release delay time | | | 53 | ns | |
| td(BHE–E) | BHE output delay time | No wait | 20 | | ns | |
| | | Wait 1 | | | | |
| | | Wait 0 | 182 | | ns | |
| td(R/W–E) | R/W output delay time | No wait | 20 | | ns | |
| | | Wait 1 | | | | |
| | | Wait 0 | 182 | | ns | |
| th(E–BHE) | BHE hold time | | 33 | | ns | |
| th(E–R/W) | R/W hold time | | 33 | | ns | |
| td(E–φ ₁) | φ ₁ output delay time | | 0 | 30 | ns | |
| td(φ ₁ –HLDA) | HLDA output delay time | | | 120 | ns | |

Notes 1. This applies when the main clock division selection bit = "0" and f(f₂) = 6 MHz.

2. No wait : Wait bit = "1".

Wait 1 : The external memory area is accessed with wait bit = "0" and wait selection bit = "1".

Wait 0 : The external memory area is accessed with wait bit = "0" and wait selection bit = "0".

Memory expansion mode and microprocessor mode

Bus timing data formulas ($V_{CC} = 2.7 - 5.5 V$, $V_{SS} = 0 V$, $T_a = -40$ to $+85$ °C, $f(XIN) = 12$ MHz (Max., Note), unless otherwise noted)


| Symbol | Parameter | Wait mode | Limits | | Unit |
|------------|------------------------------------|-----------|--|------|------|
| | | | Min. | Max. | |
| td(An-E) | Address output delay time | No wait | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 63 | ns |
| | | Wait 1 | $\frac{3 \times 10^9}{2 \cdot f(f_2)}$ | - 68 | |
| | | Wait 0 | $\frac{3 \times 10^9}{2 \cdot f(f_2)}$ | - 68 | |
| td(A-E) | Address output delay time | No wait | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 63 | ns |
| | | Wait 1 | $\frac{3 \times 10^9}{2 \cdot f(f_2)}$ | - 88 | |
| | | Wait 0 | $\frac{3 \times 10^9}{2 \cdot f(f_2)}$ | - 88 | |
| th(E-An) | Address hold time | | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 43 | ns |
| tw(ALE) | ALE pulse width | No wait | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 43 | ns |
| | | Wait 1 | $\frac{2 \times 10^9}{2 \cdot f(f_2)}$ | - 43 | |
| | | Wait 0 | $\frac{2 \times 10^9}{2 \cdot f(f_2)}$ | - 43 | |
| tsu(A-ALE) | Address output set up time | No wait | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 73 | ns |
| | | Wait 1 | $\frac{2 \times 10^9}{2 \cdot f(f_2)}$ | - 73 | |
| | | Wait 0 | $\frac{2 \times 10^9}{2 \cdot f(f_2)}$ | - 73 | |
| th(ALE-A) | Address hold time | No wait | 9 | | ns |
| | | Wait 1 | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 43 | |
| | | Wait 0 | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 43 | |
| td(ALE-E) | ALE output delay time | No wait | 4 | | ns |
| | | Wait 1 | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 43 | |
| | | Wait 0 | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 43 | |
| td(E-DQ) | Data output delay time | | | 90 | ns |
| th(E-DQ) | Data hold time | | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 43 | ns |
| tw(EL) | \bar{E} pulse width | No wait | $\frac{2 \times 10^9}{2 \cdot f(f_2)}$ | - 35 | ns |
| | | Wait 1 | $\frac{4 \times 10^9}{2 \cdot f(f_2)}$ | - 35 | |
| | | Wait 0 | $\frac{4 \times 10^9}{2 \cdot f(f_2)}$ | - 35 | |
| tpxz(E-DZ) | Floating start delay time | | | 10 | ns |
| tpzx(E-DZ) | Floating release delay time | | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 30 | ns |
| td(BHE-E) | \overline{BHE} output delay time | No wait | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 63 | ns |
| | | Wait 1 | $\frac{3 \times 10^9}{2 \cdot f(f_2)}$ | - 68 | |
| | | Wait 0 | $\frac{3 \times 10^9}{2 \cdot f(f_2)}$ | - 68 | |
| td(R/W-E) | R/\overline{W} output delay time | No wait | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 63 | ns |
| | | Wait 1 | $\frac{3 \times 10^9}{2 \cdot f(f_2)}$ | - 68 | |
| | | Wait 0 | $\frac{3 \times 10^9}{2 \cdot f(f_2)}$ | - 68 | |
| th(E-BHE) | \overline{BHE} hold time | | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 50 | ns |
| th(E-R/W) | R/\overline{W} hold time | | $\frac{1 \times 10^9}{2 \cdot f(f_2)}$ | - 50 | ns |
| td(E-φ 1) | φ 1 output delay time | | 0 | 30 | ns |

Notes 1. This applies when the main-clock division selection bit = "0".


2. $f(f_2)$ represents the clock f_2 frequency.


For the relation to the main clock and sub clock, refer to Table 9 in data sheet "M37733MHBXXXFP".

TIMING DIAGRAM

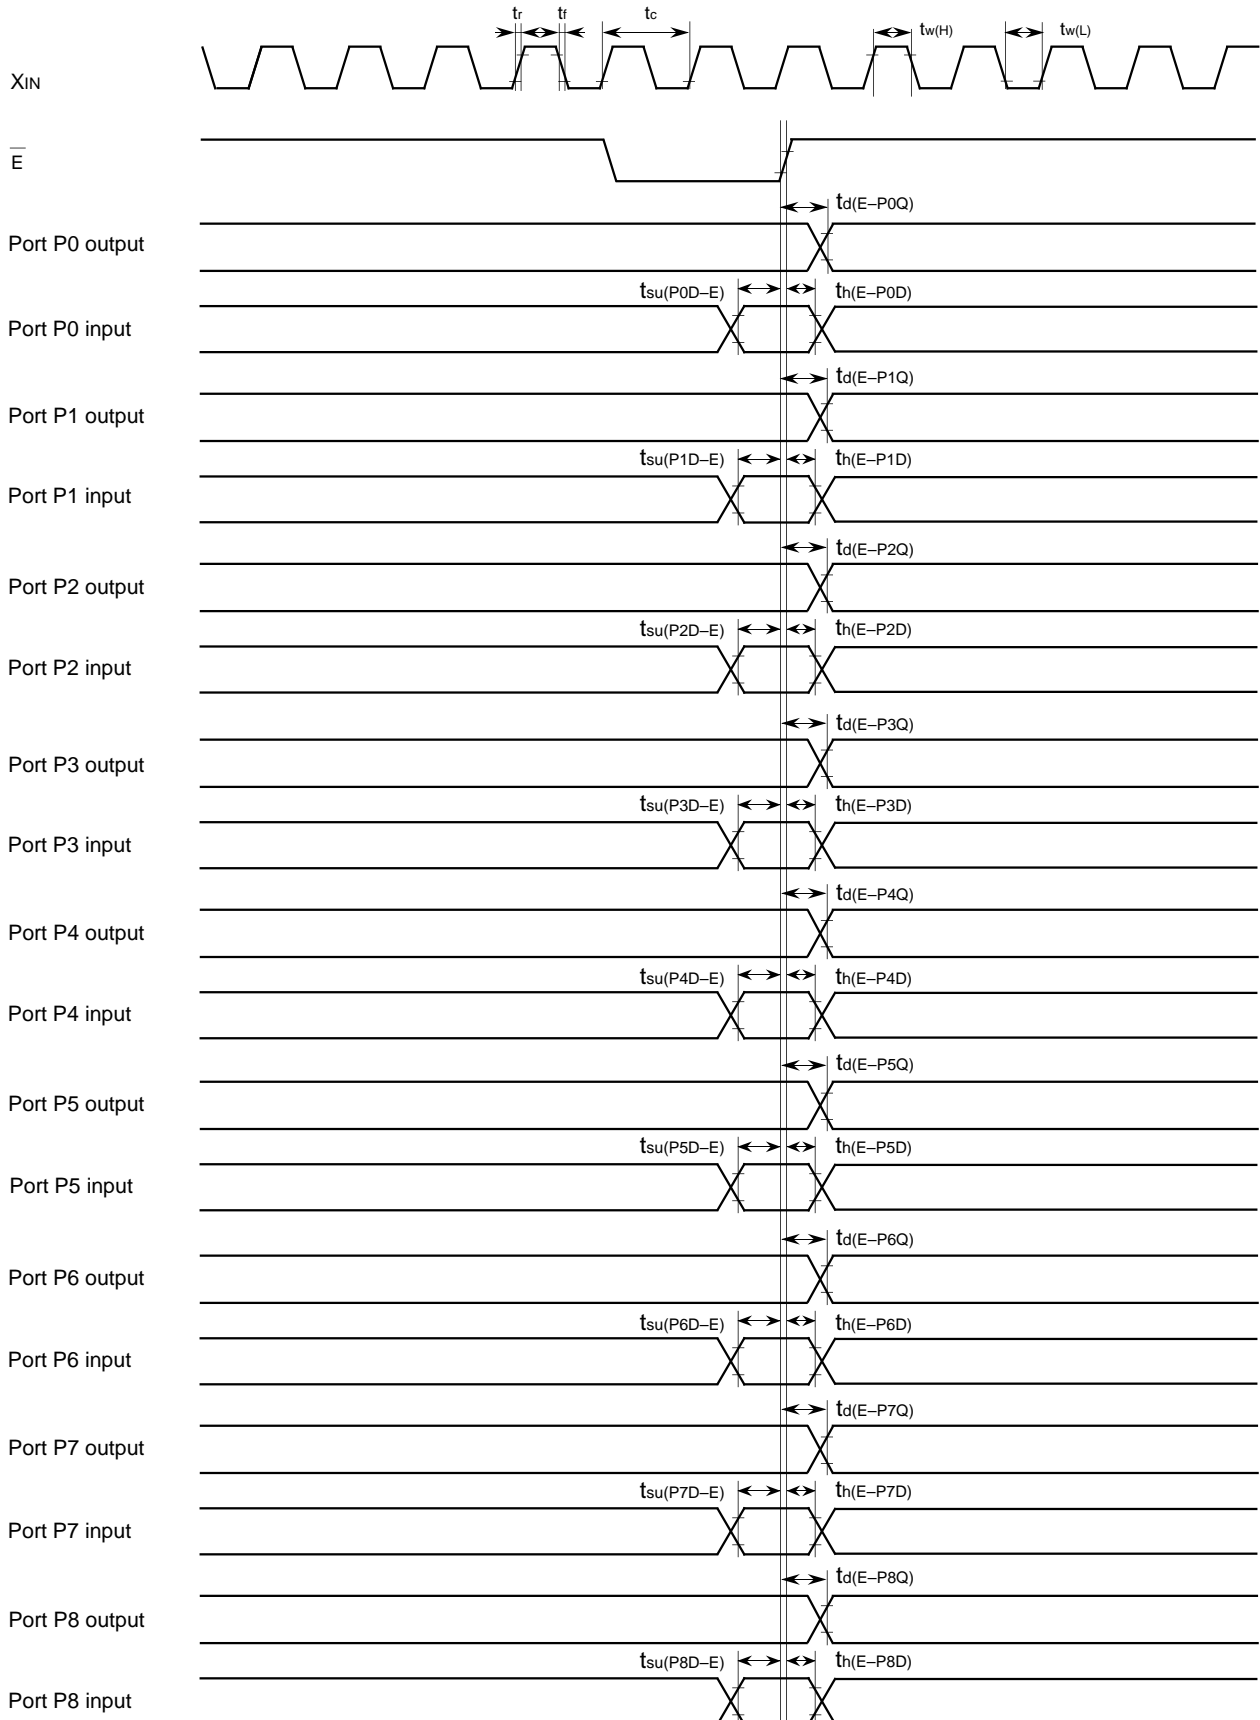


PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

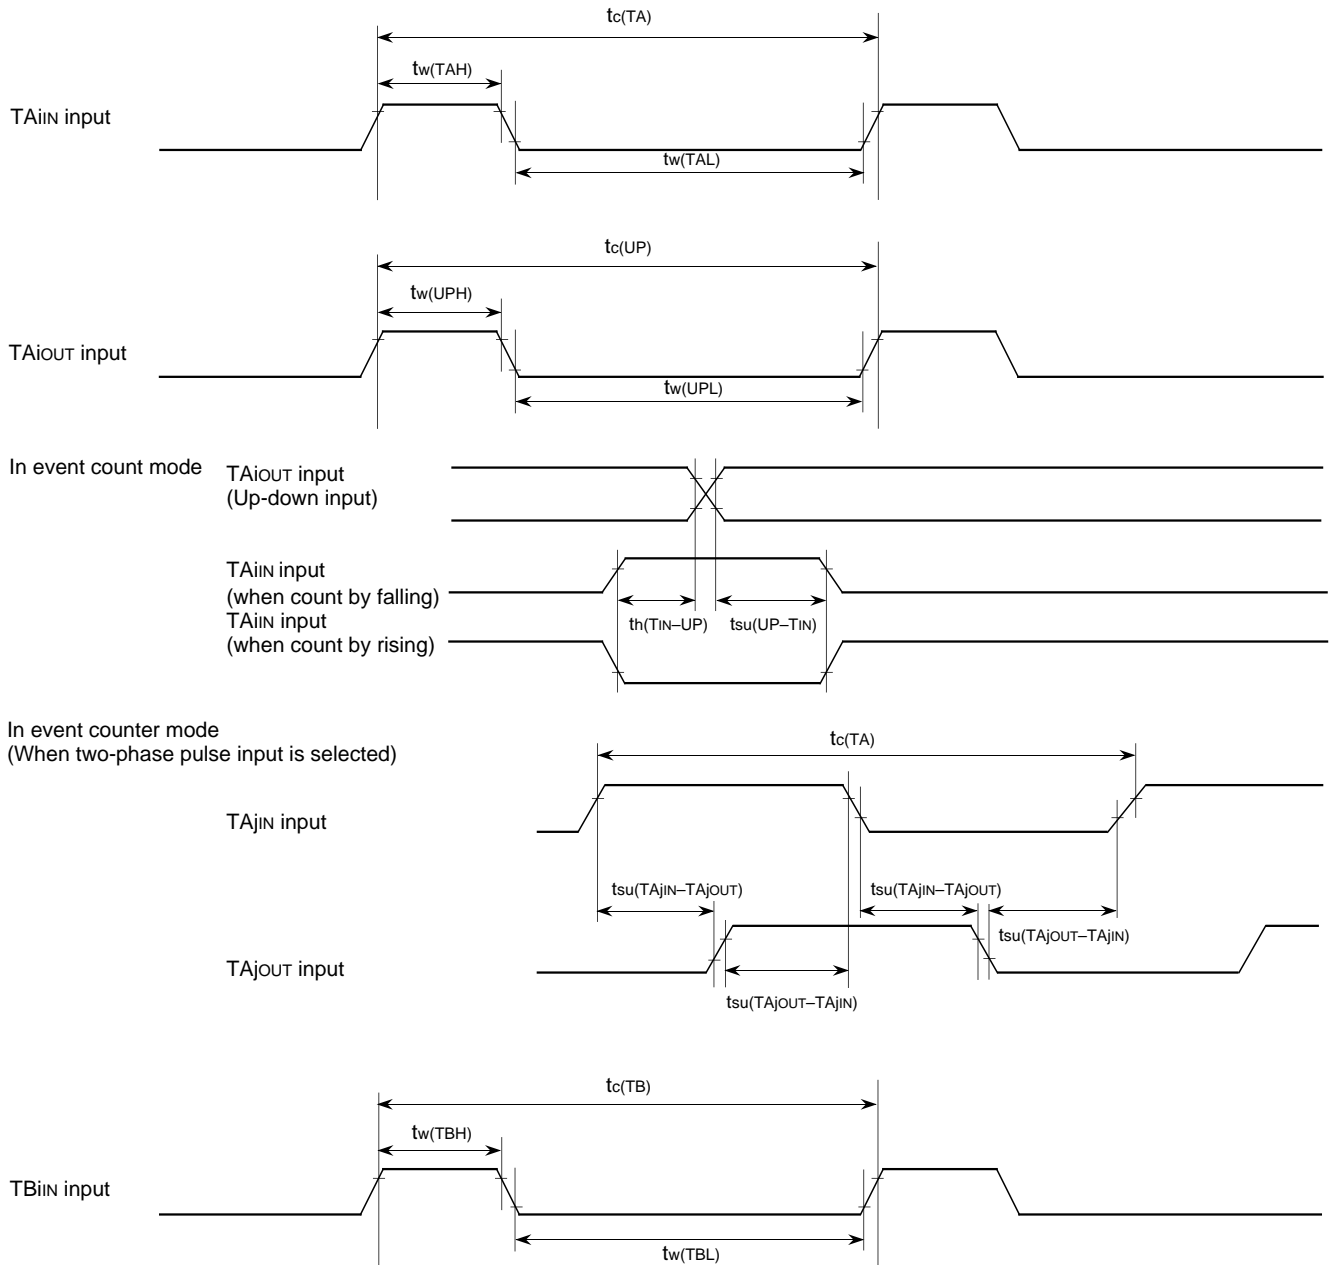


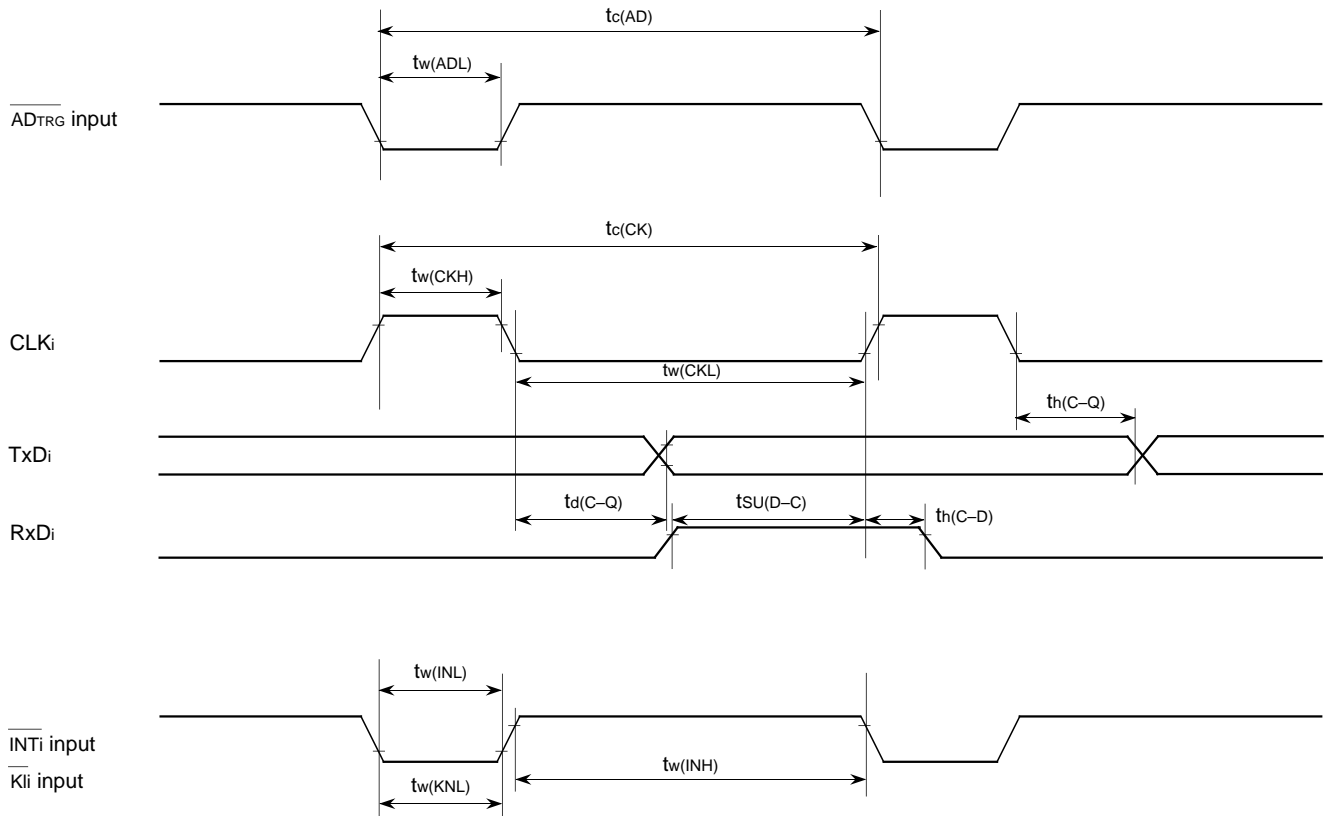


Memory expansion mode and microprocessor mode
 (When wait bit = "1")

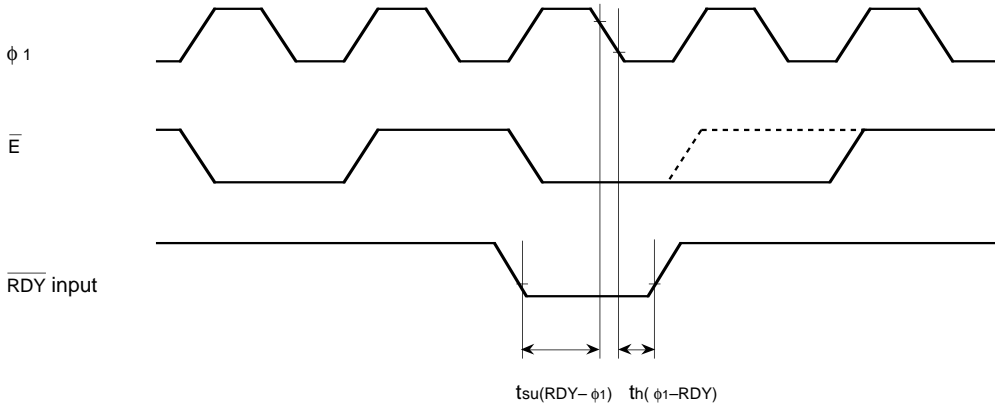

(When wait bit = "0")

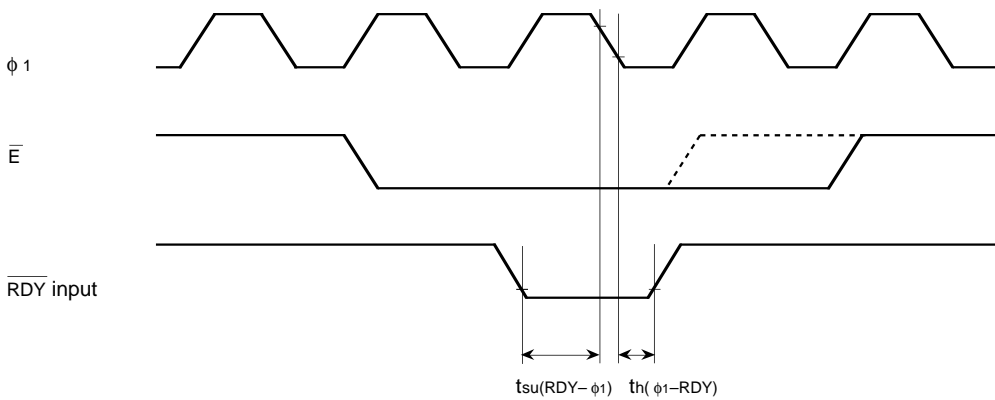


(When wait bit = "1" or "0" in common)

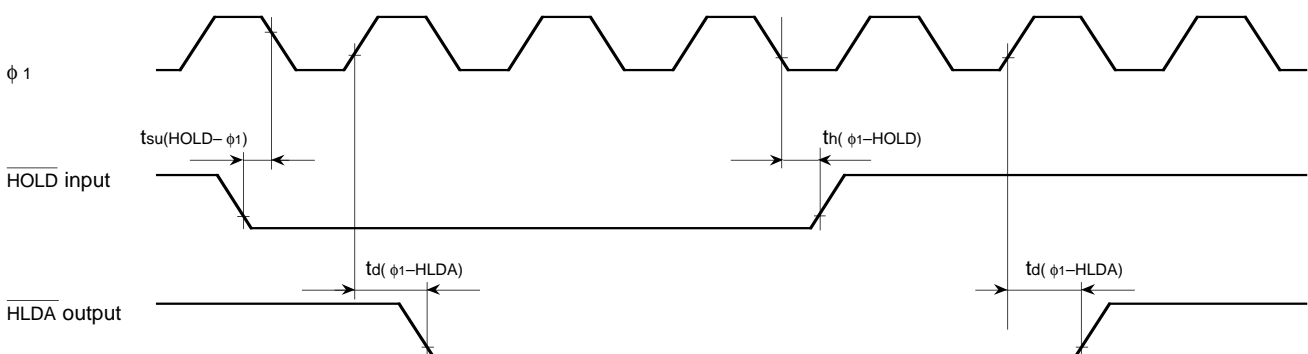

Test conditions

- $V_{CC} = 2.7 - 5.5 \text{ V}$
- Input timing voltage : $V_{IL} = 0.2 V_{CC}$, $V_{IH} = 0.8 V_{CC}$
- Output timing voltage : $V_{OL} = 0.8 \text{ V}$, $V_{OH} = 2.0 \text{ V}$

Memory expansion mode and microprocessor mode
 (No wait : When wait bit = "1")

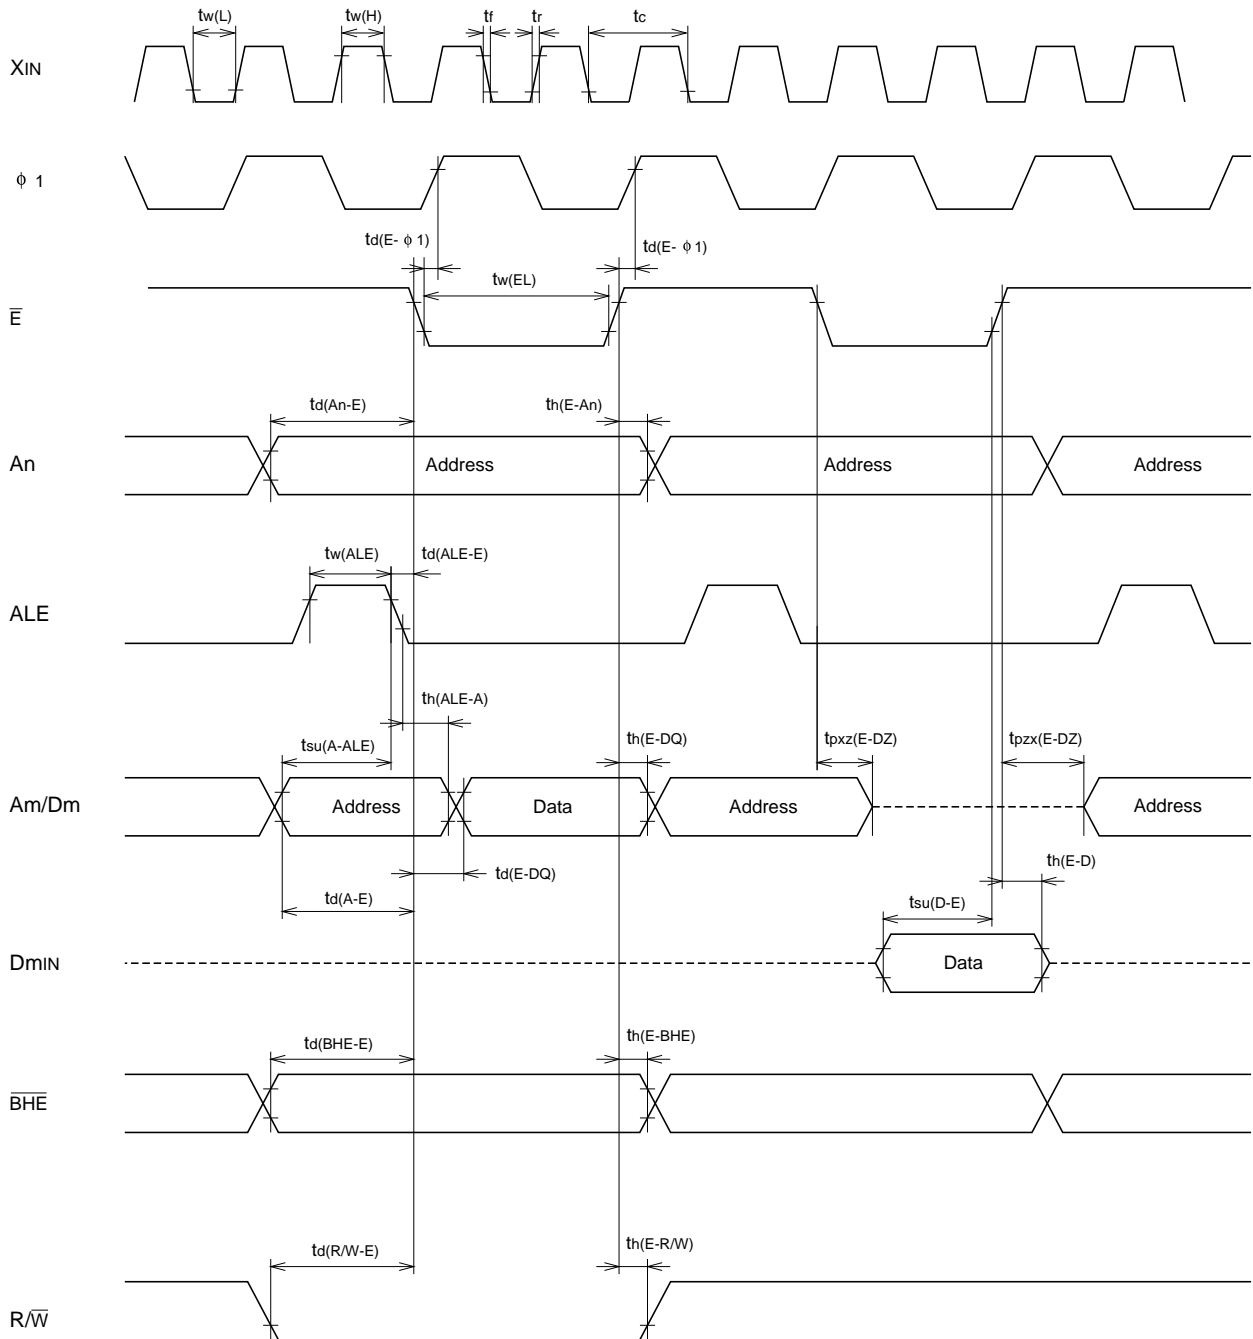


Test condition

- $V_{CC} = 2.7 - 5.5 \text{ V}$
- Output timing voltage : $V_{OL} = 0.8 \text{ V}$, $V_{OH} = 2.0 \text{ V}$
- Data input Dmin : $V_{IL} = 0.16 V_{CC}$, $V_{IH} = 0.5 V_{CC}$

Memory expansion mode and microprocessor mode

(Wait 1 : The external area is accessed when wait bit = "0" and wait selection bit = "1".)

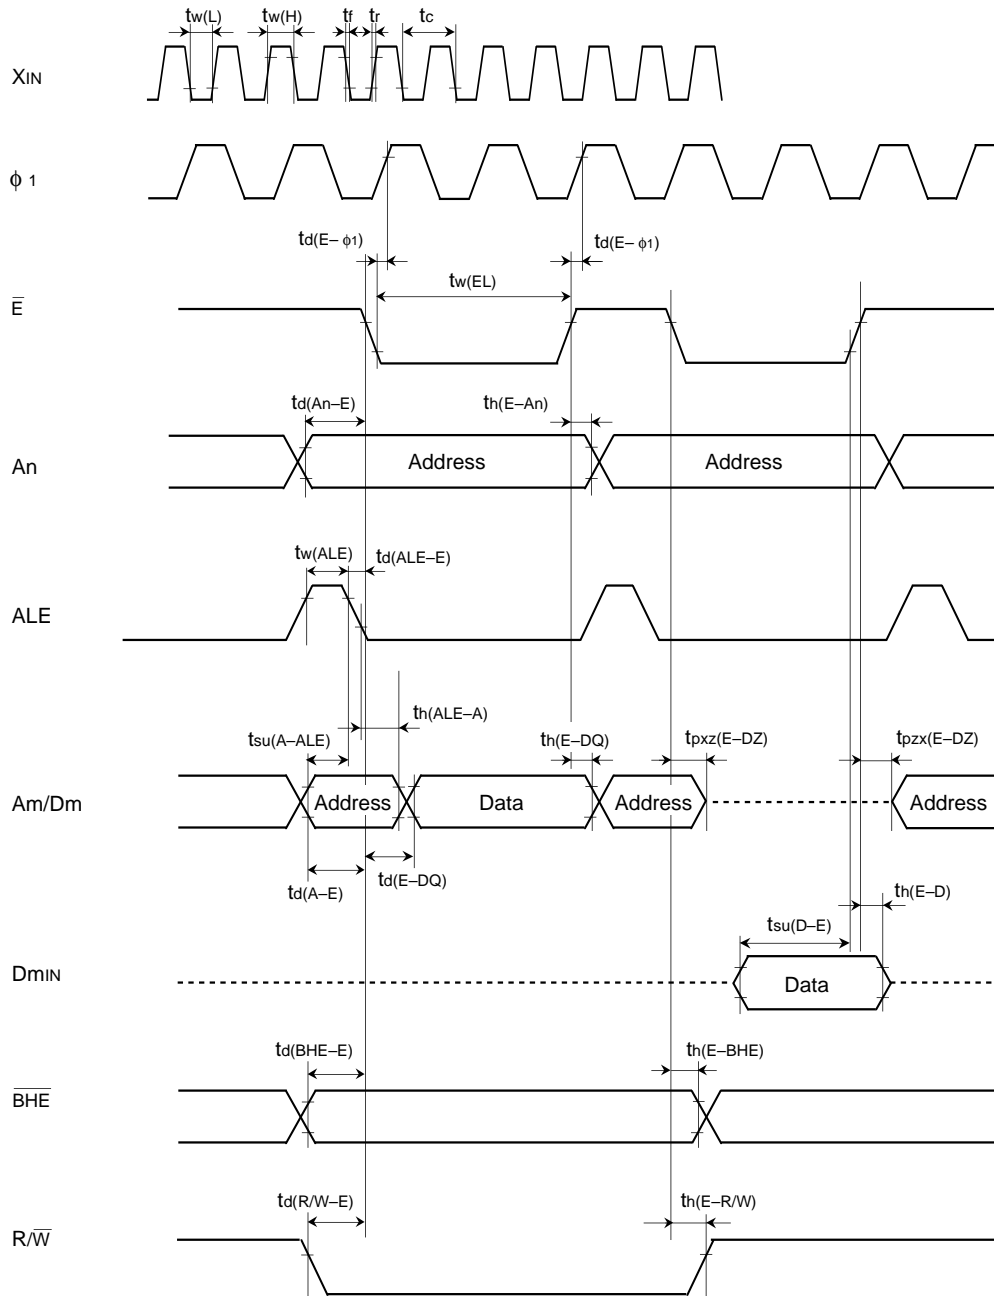


Test condition

- $V_{CC} = 2.7 - 5.5 V$
- Output timing voltage : $V_{OL} = 0.8 V$, $V_{OH} = 2.0 V$
- Data input D_{min} : $V_{IL} = 0.16 V_{CC}$, $V_{IH} = 0.5 V_{CC}$

Memory expansion mode and microprocessor mode

(Wait 0 : The external memory area is accessed when wait bit = "0" and wait selection bit = "0".)

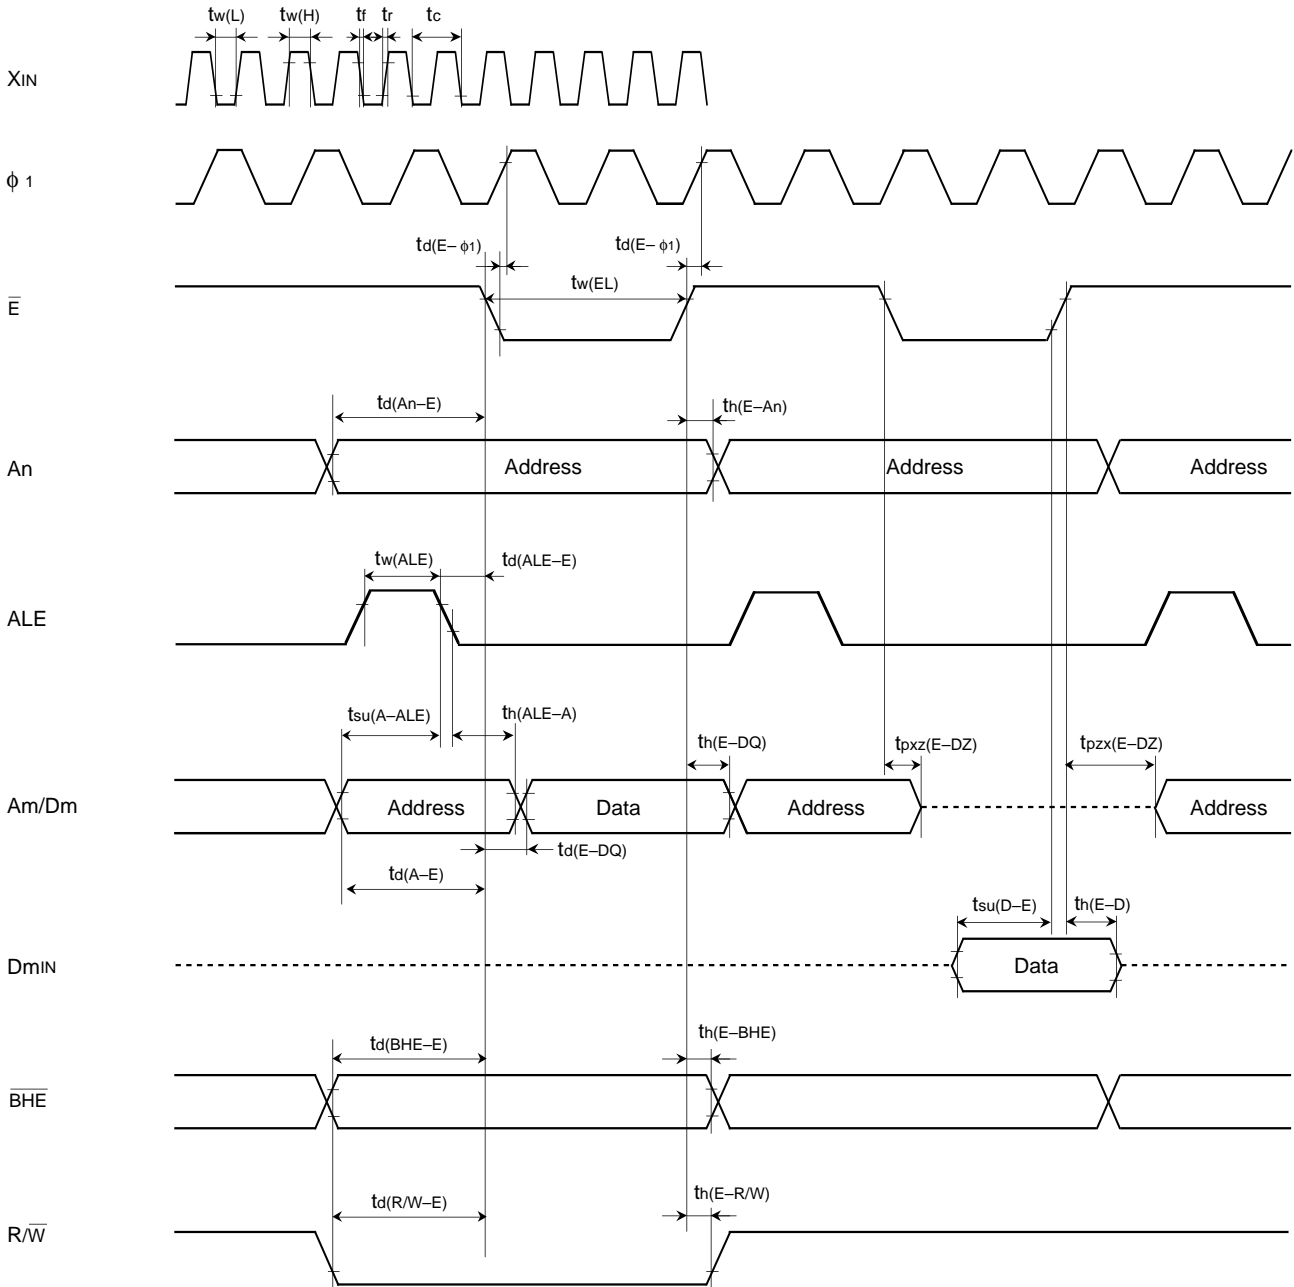

Test conditions


- $V_{CC} = 2.7 - 5.5 \text{ V}$
- Output timing voltage : $V_{OL} = 0.8 \text{ V}$, $V_{OH} = 2.0 \text{ V}$
- Data input D_{min} : $V_{IL} = 0.16 V_{CC}$, $V_{IH} = 0.5 V_{CC}$

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

PACKAGE OUTLINE

80P6D-A

Plastic 80pin 12x12mm body LQFP

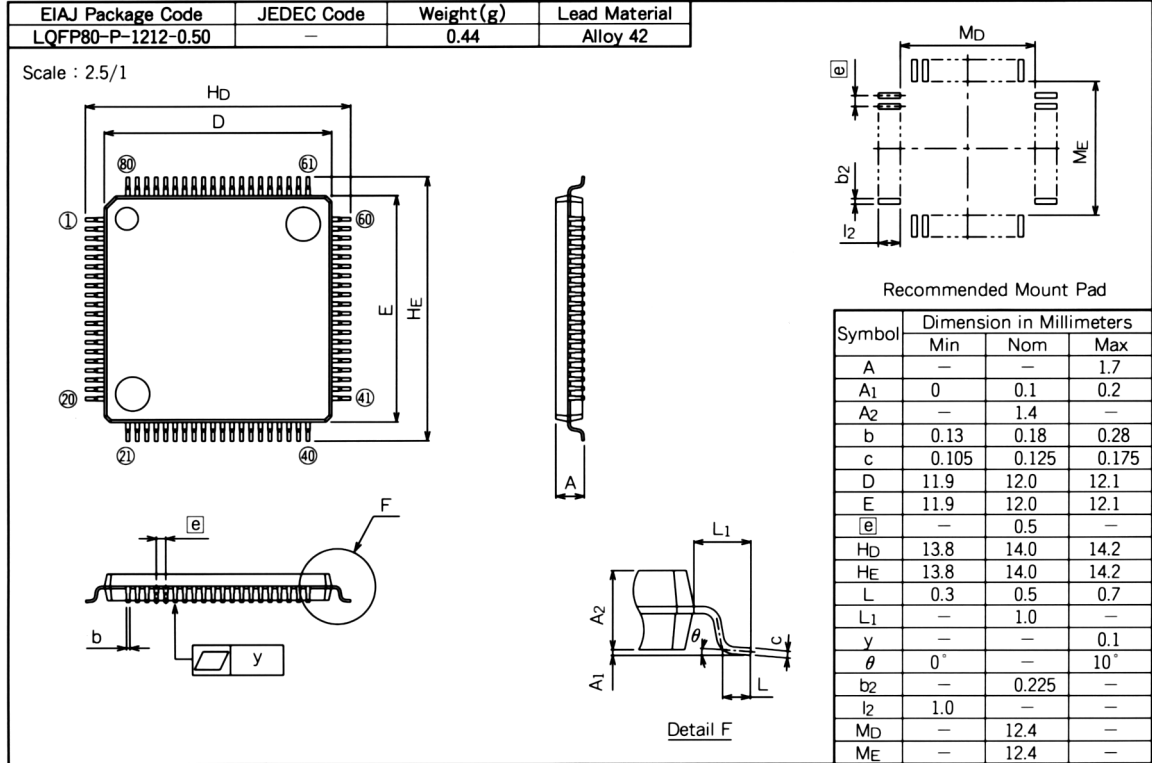

PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

GZZ-SH00-44B<68A0>

7700 FAMILY MASK ROM ORDER CONFIRMATION FORM
SINGLE-CHIP 16-BIT MICROCOMPUTER
M37733MHLXXXHP
MITSUBISHI ELECTRIC

| | |
|-----------------|--|
| Mask ROM number | |
|-----------------|--|

| | | |
|---------|------------------------|----------------------|
| Receipt | Date: | |
| | Section head signature | Supervisor signature |
| | | |

Note : Please fill in all items marked ※

| | | | | | | |
|---|----------|--------------|---------|---------------------|---------------------|------------|
| ※ | Customer | Company name | TEL () | Issuance signatures | Responsible officer | Supervisor |
| | | Date issued | Date: | | | |

※1. Confirmation


Specify the name of the product being ordered.
Three sets of EPROMs are required for each pattern (Check @ in the appropriate box).
If at least two of the three sets of EPROMs submitted contain the identical data, we will produce masks based on this data.
We shall assume the responsibility for errors only if the mask ROM data on the products we produce differ from this data.
Thus, the customer must be especially careful in verifying the data contained in the EPROMs submitted.

Checksum code for entire EPROM areas

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|

 (hexadecimal notation)

EPROM Type :

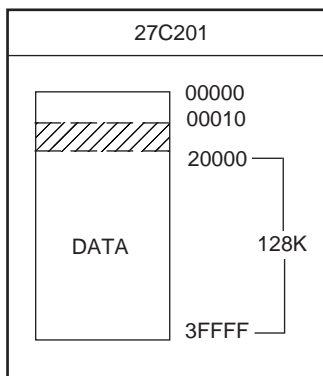

- (1) Set "FF₁₆" in the shaded area.
- (2) Address 0₁₆ to 10₁₆ are the area for storing the data on model designation and options. This area must be written with the data shown below.
Details for option data are given next in the section describing the STP instruction option.
Address and data are written in hexadecimal notation.

| Address | Address | Address |
|---------|---------|----------------|
| 4D 0 | 4C 8 | Option data 10 |
| 33 1 | FF 9 | |
| 37 2 | FF A | |
| 37 3 | FF B | |
| 33 4 | FF C | |
| 33 5 | FF D | |
| 4D 6 | FF E | |
| 48 7 | FF F | |

※2. STP instruction option

One of the following sets of data should be written to the option data address (10₁₆) of the EPROM you have ordered.
Check @ in the appropriate box.

- STP instruction enable

| | |
|--|--|
| | |
|--|--|

 Address 10₁₆
- STP instruction disable

| | |
|--|--|
| | |
|--|--|

 Address 10₁₆

※3. Mark specification

Mark specification must be submitted using the correct form for the type of package being ordered fill out the appropriate 80P6D Mark Specification Form (for M37733MHLXXXHP) and attach to the Mask ROM Order Confirmation Form.


※4. Comments

80P6S (80-PIN QFP) MARK SPECIFICATION FORM
80P6D (80-PIN Fine-pitch QFP)


Mitsubishi IC catalog name

Please choose one of the marking types below (A, B, C), and enter the Mitsubishi IC catalog name and the special mark (if needed).

A. Standard Mitsubishi Mark

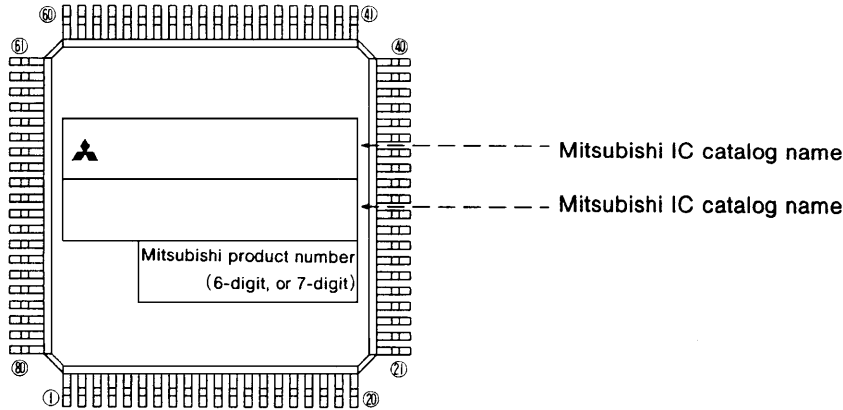

B. Customer's Parts Number + Mitsubishi IC Catalog Name

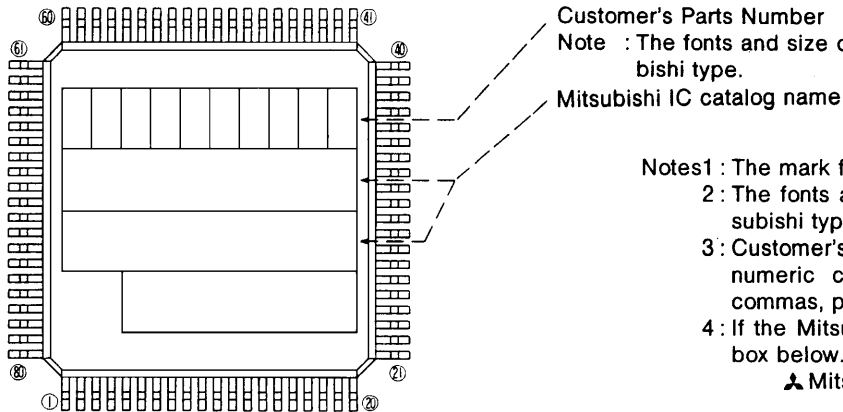


Customer's Parts Number
 Note : The fonts and size of characters are standard Mitsubishi type.
 Mitsubishi IC catalog name

- Notes1 : The mark field should be written right aligned.
 2: The fonts and size of characters are standard Mitsubishi type.
 3: Customer's parts number can be up to 10 alphanumeric characters for capital letters, hyphens, commas, periods and so on.
 4: If the Mitsubishi logo is not required, check the box below.
 Mitsubishi logo is not required

- 5: The allocation of Mitsubishi IC catalog name and Mitsubishi product number is different on the package owing to the number of Mitsubishi IC catalog name's characters, and the requiring Mitsubishi logo or not.

C. Special Mark Required

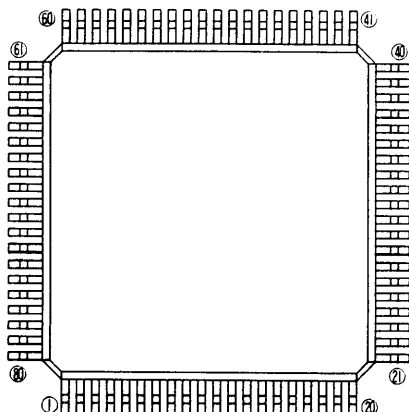

- Notes1 : If special mark is to be printed, indicate the desired layout of the mark in the left figure. The layout will be duplicated technically as close as possible. Mitsubishi product number (6-digit, or 7-digit) and Mask ROM number (3-digit) are always marked for sorting the products.
 2: If special character fonts (e.g., customer's trade mark logo) must be used in Special Mark, check the box below.
 For the new special character fonts a clean font original (ideally logo drawing) must be submitted.

Special character fonts required

PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.

MITSUBISHI MICROCOMPUTERS

M37733MHLXXXHP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

Keep safety first in your circuit designs!

- Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitute, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.

REVISION DESCRIPTION LIST

M37733MHLXXXHP Datasheet

| Rev. No. | Revision Description | | Rev. date | | | | | | | | | | | | | | | | | | | | |
|----------|--|--|---|--------|-----------|--------|--|------|------|------|----------|-----------------------|-----|----------------------|--------------------|-----|-----|-----|---|--|-----|--|-----|
| 1.00 | First Edition | | 970414 | | | | | | | | | | | | | | | | | | | | |
| 1.01 | The following are added: <ul style="list-style-type: none"> • MASK ROM ORDER CONFIRMATION FORM • MARK SPECIFICATION FORM | | 980421 | | | | | | | | | | | | | | | | | | | | |
| 2.00 | The following are revised: | | 980731 | | | | | | | | | | | | | | | | | | | | |
| | Page | Previous Version | Revised Version | | | | | | | | | | | | | | | | | | | | |
| | P1 PIN CONFIGURATION (TOP VIEW) | Outline 80P6D-A | Outline 80P6D-A, 80P6Q-A | | | | | | | | | | | | | | | | | | | | |
| | P5 Right column Line 2 | The M37733MHLXXXHP has 28 powerful addressing modes. Refer to the SINGLE-CHIP 16-BIT MICROCOMPUTERS DATA BOOK for the details of each addressing mode. MACHINE INSTRUCTION LIST The M37733MHLXXXHP has 103 machine instructions. Refer to the SINGLE-CHIP 16-BIT MICROCOMPUTERS DATA BOOK for details. | The M37733MHLXXXHP has 28 powerful addressing modes. Refer to the "7700 Family Software Manual" for the details. MACHINE INSTRUCTION LIST The M37733MHLXXXHP has 103 machine instructions. Refer to the "7700 Family Software Manual" for the details. | | | | | | | | | | | | | | | | | | | | |
| | Line 10 | (2) 80P6D mark specification form | (2) 80P6D, 80P6Q mark specification form | | | | | | | | | | | | | | | | | | | | |
| | P6 RECOMMENDED OPERATING CONDITIONS | Previous Version <table border="1"> <thead> <tr> <th rowspan="2">Symbol</th> <th rowspan="2">Parameter</th> <th colspan="3">Limits</th> <th rowspan="2">Unit</th> </tr> <tr> <th>Min.</th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Vcc</td> <td rowspan="2">Power source voltage</td> <td>f(XIN) : Operating</td> <td>4.5</td> <td>5.0</td> <td>5.5</td> <td rowspan="2">V</td> </tr> <tr> <td>f(XIN) : Stopped, f(XCIN) = 32.768 kHz</td> <td>2.7</td> <td></td> <td>5.5</td> </tr> </tbody> </table> | | Symbol | Parameter | Limits | | | Unit | Min. | Typ. | Max. | Vcc | Power source voltage | f(XIN) : Operating | 4.5 | 5.0 | 5.5 | V | f(XIN) : Stopped, f(XCIN) = 32.768 kHz | 2.7 | | 5.5 |
| Symbol | Parameter | Limits | | | | Unit | | | | | | | | | | | | | | | | | |
| | | Min. | Typ. | Max. | | | | | | | | | | | | | | | | | | | |
| Vcc | Power source voltage | f(XIN) : Operating | 4.5 | 5.0 | 5.5 | V | | | | | | | | | | | | | | | | | |
| | | f(XIN) : Stopped, f(XCIN) = 32.768 kHz | 2.7 | | 5.5 | | | | | | | | | | | | | | | | | | |
| | | Revised Version <table border="1"> <thead> <tr> <th rowspan="2">Symbol</th> <th rowspan="2">Parameter</th> <th colspan="3">Limits</th> <th rowspan="2">Unit</th> </tr> <tr> <th>Min.</th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Vcc</td> <td rowspan="2">Power source voltage</td> <td>f(XIN) : Operating</td> <td>2.7</td> <td></td> <td>5.5</td> <td rowspan="2">V</td> </tr> <tr> <td>f(XIN) : Stopped, f(XCIN) = 32.768 kHz</td> <td>2.7</td> <td></td> <td>5.5</td> </tr> </tbody> </table> | | Symbol | Parameter | Limits | | | Unit | Min. | Typ. | Max. | Vcc | Power source voltage | f(XIN) : Operating | 2.7 | | 5.5 | V | f(XIN) : Stopped, f(XCIN) = 32.768 kHz | 2.7 | | 5.5 |
| Symbol | Parameter | Limits | | | | Unit | | | | | | | | | | | | | | | | | |
| | | Min. | Typ. | Max. | | | | | | | | | | | | | | | | | | | |
| Vcc | Power source voltage | f(XIN) : Operating | 2.7 | | 5.5 | V | | | | | | | | | | | | | | | | | |
| | | f(XIN) : Stopped, f(XCIN) = 32.768 kHz | 2.7 | | 5.5 | | | | | | | | | | | | | | | | | | |
| | P9 Memory expansion mode and microprocessor mode | Previous Version <table border="1"> <thead> <tr> <th rowspan="2">Symbol</th> <th rowspan="2">Parameter</th> <th colspan="2">Limits</th> <th rowspan="2">Unit</th> </tr> <tr> <th>Min.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>tsu(D-E)</td> <td>Data input setup time</td> <td>80</td> <td></td> <td>ns</td> </tr> </tbody> </table> | | Symbol | Parameter | Limits | | Unit | Min. | Max. | tsu(D-E) | Data input setup time | 80 | | ns | | | | | | | | |
| Symbol | Parameter | Limits | | | | Unit | | | | | | | | | | | | | | | | | |
| | | Min. | Max. | | | | | | | | | | | | | | | | | | | | |
| tsu(D-E) | Data input setup time | 80 | | ns | | | | | | | | | | | | | | | | | | | |
| | | Revised Version <table border="1"> <thead> <tr> <th rowspan="2">Symbol</th> <th rowspan="2">Parameter</th> <th colspan="2">Limits</th> <th rowspan="2">Unit</th> </tr> <tr> <th>Min.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>tsu(D-E)</td> <td>Data input setup time</td> <td>50</td> <td></td> <td>ns</td> </tr> </tbody> </table> | | Symbol | Parameter | Limits | | Unit | Min. | Max. | tsu(D-E) | Data input setup time | 50 | | ns | | | | | | | | |
| Symbol | Parameter | Limits | | | | Unit | | | | | | | | | | | | | | | | | |
| | | Min. | Max. | | | | | | | | | | | | | | | | | | | | |
| tsu(D-E) | Data input setup time | 50 | | ns | | | | | | | | | | | | | | | | | | | |