

MITSUBISHI <ANALOG ASSP> M5T494P, FP, GP

SWITCHING REGULATOR CONTROL

DESCRIPTION

The M5T494 is a monolithic IC designed for a pulse-width-modulation control circuit.

It contains all functions necessary to control single-ended or push-pull switching power supplies. It employs an on-chip 5-volt regulator, two error amplifiers, an adjustable oscillator, a dead-time control comparator, a pulse-steering flip-flop, output-control circuitry and an undervoltage-lockout (UVLO) function.

The UVLO prevents irregular operation at the IC outputs when the IC supply voltage is excessively low.

FEATURES


- Undervoltage lockout (inhibits output for low V_{CC})
- Built-in 5-volt reference regulator
..... (Reference voltage $5V \pm 5\%$)
- Output control selectable for single-ended or push-pull operation.
- Uncommitted outputs for 200-mA sink or source.

APPLICATION


Switching voltage regulators, Step-up step-down regulators, Voltage inversion regulators.

RECOMMENDED OPERATING CONDITIONS

Supply voltage range 7 ~ 40V
 Pin 3 sink current Less than 0.3mA
 Timing capacitor, C_T 470pF ~ 3.3 μ F
 Timing resistor, R_T 1.8 ~ 500k Ω
 Oscillator frequency Lower than 300kHz

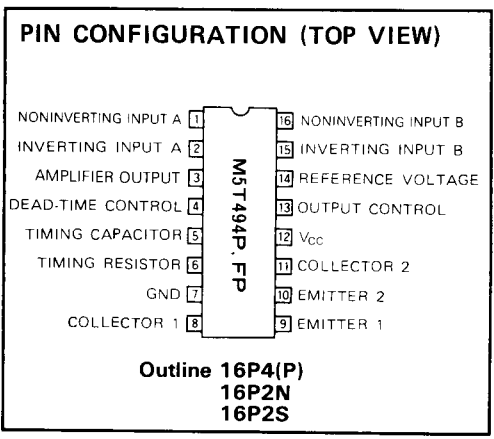

BLOCK DIAGRAM

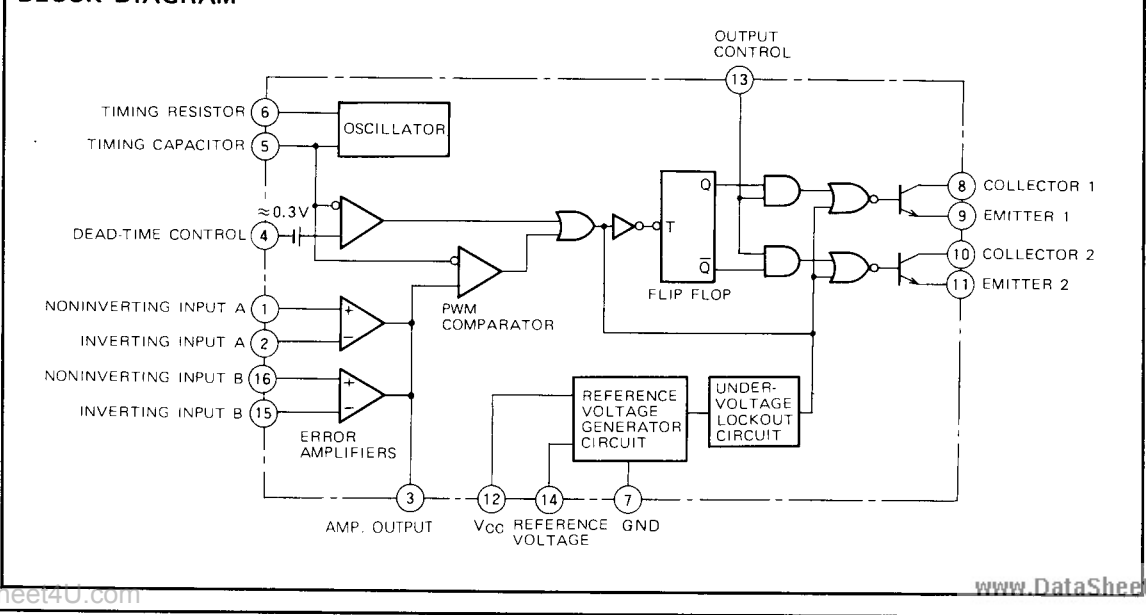

SWITCHING REGULATOR CONTROL

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C, unless otherwise noted)

Symbol	Parameter	Conditions	Limits	Unit
V _{CC}	Supply voltage		41	V
V _{ICM}	common input voltage		-0.3 ~ V _{CC}	V
V _{ID}	Differential input voltage		V _{CC}	V
V _O	Output voltage		41	V
I _O	Output current		200	mA
V _③	Input voltage		-0.3 ~ V _③ + 0.3	V
P _d	Power dissipation		1000(P)/800(FP)/550(GP)	mW
K _θ	Thermal derating	T _a ≥ 25°C	8(P)/6.4(FP)/4.4(GP)	mW/°C
T _{opr}	Operating temperature		-20 ~ +85	°C
T _{stg}	Storage temperature		-40 ~ +125	°C

ELECTRICAL CHARACTERISTICS (V_{CC} = 15V, f_{osc} = 40 kHz, Ta = -20 ~ +70°C, unless otherwise noted)


Symbol	Block	Parameter	Test conditions	Limits			Unit
				Min	Typ	Max	
V _{ref}	REFERENCE	Output voltage	I _{ref} = -1mA, T _J = 25°C	4.75	5	5.25	V
ΔV _{refIN}		Input regulation	V _{CC} = 7 ~ 40V, I _{ref} = -1mA, T _J = 25°C		1	10	mV
ΔV _{refL}		Load regulation	I _{ref} = -1 ~ -10mA, T _J = 25°C		2	20	mV
ΔV _{ref/ΔT_a}		Temperature coefficient output voltage	T _a = -20 + 85°C, I _{ref} = -1mA		0.01	0.03	%/°C
I _s	OSCILLATOR	Short circuit current	V _{ref} = 0	-50	-30	-15	mA
f _{osc}		Frequency	C _T = 4700pF, R _T = 6.2kΩ	37	41	45	kHz
Δf/f _s		Standard deviation of frequency	V _{CC} = 7 ~ 40V, T _a = 25°C, C _T , R _T		10		%
Δf/f _{IN}		Frequency change with voltage	V _{CC} = 7 ~ 40V, T _a = 25°C, C _T = 4700pF, R _T = 6.2kΩ		0.5	1.5	%
Δf/f _{T_a}	Frequency change with temperature	T _a = 0 ~ 70°C, C _T = 4700pF, R _T = 6.2kΩ		1	2	%	
I _④	DEAD-TIME CONTROL	Input bias current	V _④ = 0 ~ 5.25V	-7	-0.7		μA
D _{MAX}		Maximum duty cycle (each output)	V _④ = 0V	42	45	48	%
V _{④TH1}		Input threshold voltage 1	Zero duty cycle (each output)		2.45	2.80	V
V _{④TH2}		Input threshold voltage 2	Maximum duty cycle (each output)		0		V
V _{AMPIO}	ERROR AMPLIFIERS	Input offset voltage	V ₍₃₎ = 2.5V		1	7	mV
I _{AMPIO}		Input offset current	V ₍₃₎ = 2.5V		5	200	nA
I _{AMPIB}		Input bias current	V ₍₃₎ = 2.5V	-700	-100		nA
V _{AMPICM}		Common input voltage range	V _{CC} = 7 ~ 40V	-0.3		V _{CC} - 2	V
A _v		Open loop voltage gain	V ₍₃₎ = 0.5 ~ 3.5V, T _a = 25°C	70	110		dB
f _T		Gain bandwidth product	T _a = 25°C	500	900		kHz
CMRR		Common mode rejection ratio	V _{CC} = 40V, T _a = 25°C	65	85		dB
I _{③SINK}		Output sink current	V ₍₃₎ = 0.7V	0.3	0.7		mA
I _{③SOURCE}		Output source current	V ₍₃₎ = 3.5V		-10	-2	mA
V _{③RANGE}		Output voltage range	"L" level "H" level	I ₍₃₎ = 0		0.1 0.3	V
V _{③TH}	PWM COMPARATOR	Input threshold voltage	Zero duty cycle (each output)		3.4	3.8	V
I _{③SINK}		Input sink current	V ₍₃₎ = 0.7V	0.3	0.7		mA

SWITCHING REGULATOR CONTROL

ELECTRICAL CHARACTERISTICS


Symbol	Section	Parameter	Test conditions	Limits			Unit
				Min	Typ	Max	
I_{CL}	OUTPUT	Collector leak current	$V_{CE} = 40V, V_{CC} = 40V$ (Common-emitter)		0.01	100	μA
I_{EL}		Emitter leak current	$V_{CC} = V_C = 40V, V_E = 0$ (Emitter follower)	-100	-0.01		μA
V_{CESAT}		Output saturation voltage (Common-emitter)	$I_C = 200mA, V_E = 0$		0.95	1.3	V
V_{CEON}		Output saturation voltage (Emitter follower)	$I_E = -200mA, V_C = 15V$		1.6	2.5	V
t_{r1}		Output-voltage rise time	$V_{CC} = 15V, R_L = 150\Omega, I_C = 100mA,$		80	200	ns
t_{f1}		Output-voltage fall time	$T_a = 25^\circ C$ (Common-emitter)		30	100	ns
t_{r2}		Output-voltage rise time	$V_{CC} = V_C = 15V, R_L = 150\Omega, I_E =$		200	400	ns
t_{f2}		Output-voltage fall time	$-100mA, T_a = 25^\circ C$ (Emitter follower)		30	100	ns
I_{i3}		Output-control input current	$V_{i3} = V_{ref}$		270	550	1000
V_{CCLO}	UNDER VOLTAGE LOCK-OUT	Lockout voltage	Supply voltage at output cut-off	3.8	5	5.7	V
ΔV_{CCLO}		Hysteresis		100	200	380	mV
I_{CCSB}	CIRCUIT CURRENT	Standby supply current	$V_{CC} = 15V$ All other inputs and outputs open		6.7	11.5	mA
I_{CCBI}		Average bias current	$V_{i4} = 2V,$		7.3	13	mA

TEST CIRCUIT

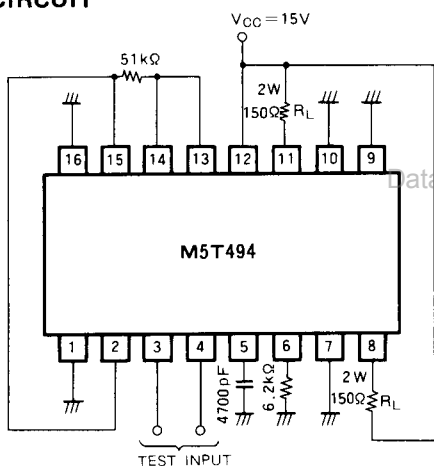


Note: To obtain output voltage from the emitter follower, connect pins ⑧ and ⑩ to V_{CC} , and connect each of pins ⑨ and ⑪ to ground through resistor R_L .


UNDERVOLTAGE LOCKOUT CHARACTERISTICS

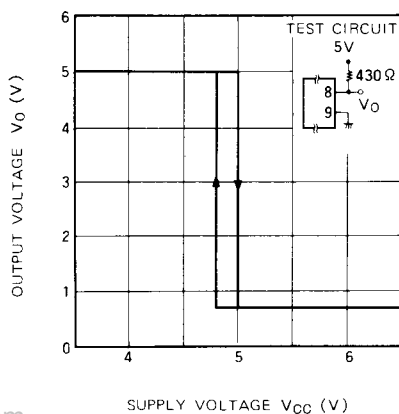

THERMAL DERATING (MAXIMUM RATING)

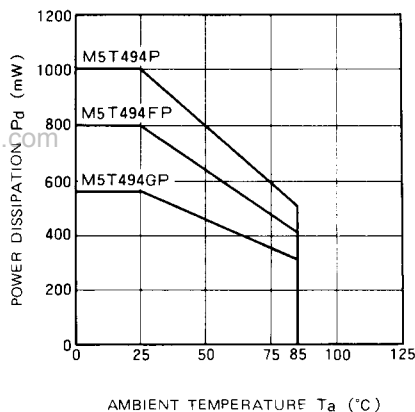


LOCKOUT VOLTAGE VS AMBIENT TEMPERATURE

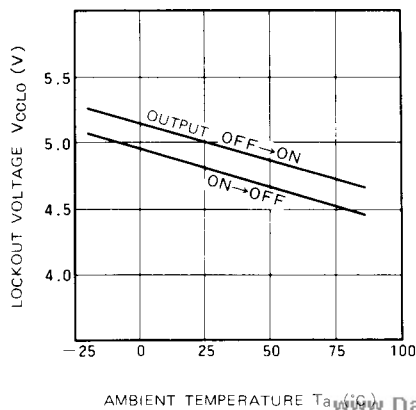


SWITCHING REGULATOR CONTROL


REFERENCE VOLTAGE VS SUPPLY VOLTAGE

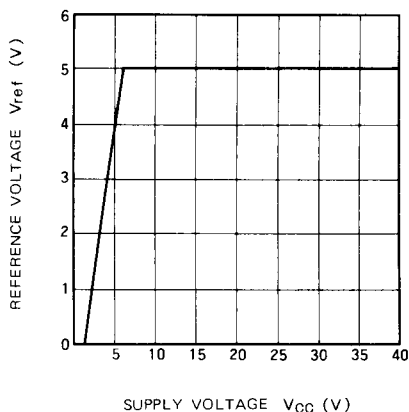


OSCILLATOR FREQUENCY VS TIMING RESISTANCE

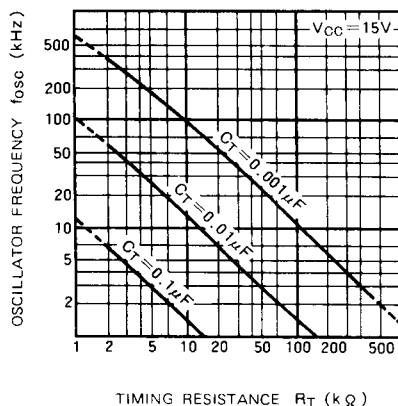


OSCILLATOR FREQUENCY CHANGE VS AMBIENT TEMPERATURE

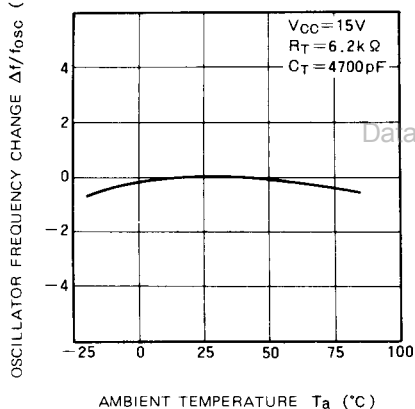


REFERENCE VOLTAGE CHANGE VS AMBIENT TEMPERATURE

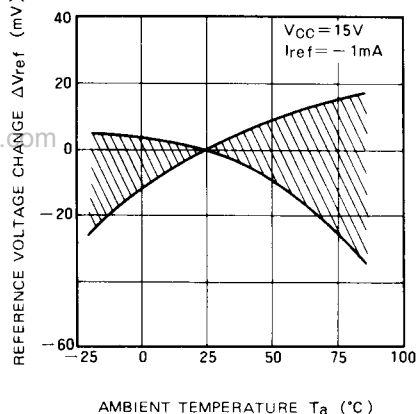



OUTPUT DUTY CYCLE VS DEAD-TIME CONTROL INPUT VOLTAGE

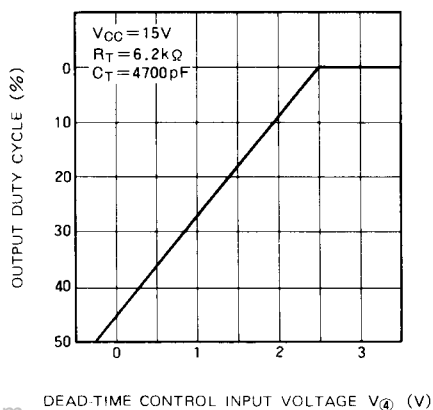

ERROR AMP OPEN LOOP VOLTAGE GAIN VS FREQUENCY

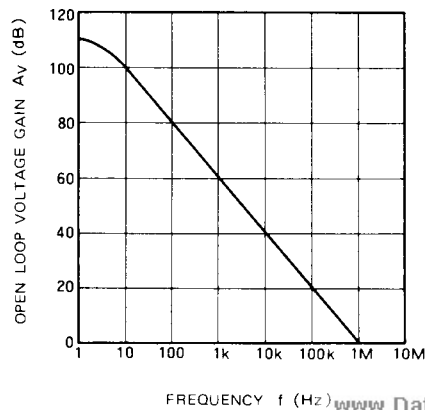


SWITCHING REGULATOR CONTROL

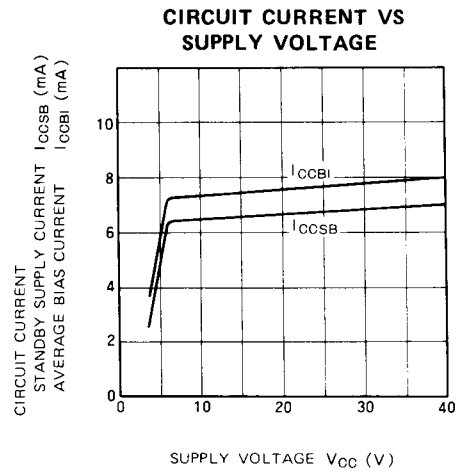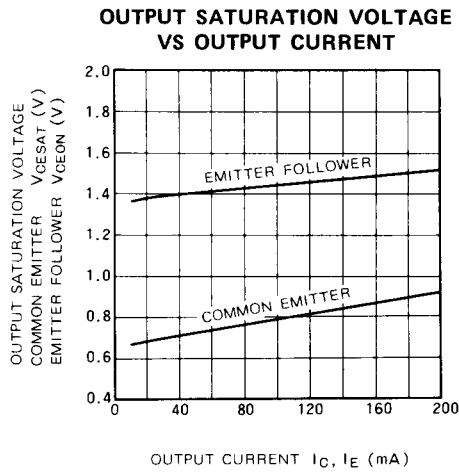

et4U.com

VOLTAGE WAVEFORMS

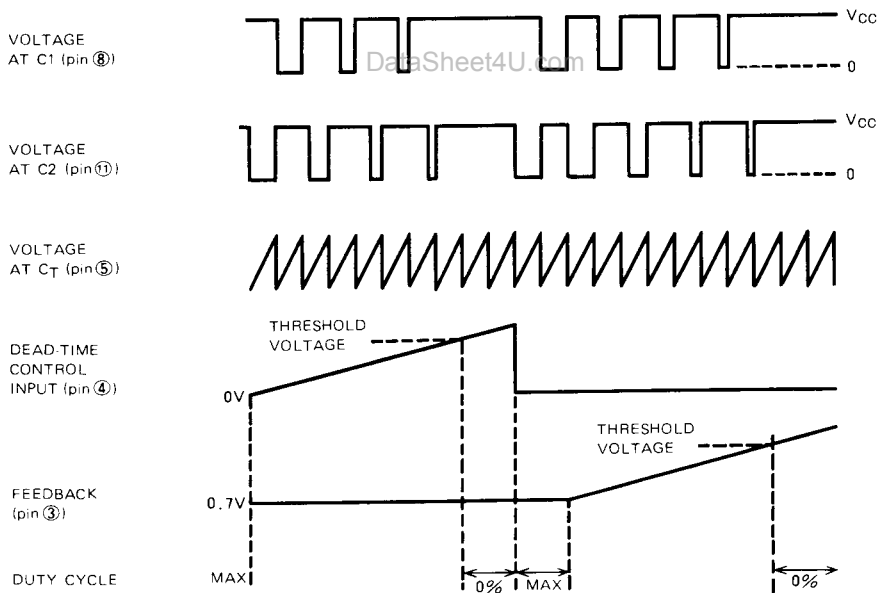

FUNCTION TABLE

OUTPUT CONTROL (pin 13)	OUTPUT FUNCTION
V_{ref}	Push-pull operation
GND	Single-ended or parallel operation