

1:1 Flux Coupled Balun Transformer 5 - 120 MHz

Rev. V3

Features


- 1:1 Impedance Ratio
- 75 Ω
- Surface Mount Package
- RoHS* Compliant

Description

The MABA-008965-CF1160 is a 1:1 RF flux coupled transformer in a surface mount package.

Ideally suited for high volume CATV application.

Schematic



Pin Configuration

Pin #	Function
1	Secondary (output)
2	Secondary Centre Tap
3	Secondary Dot (output)
4	Primary (ground)
5	Primary Dot (Input)

Electrical Specifications: Freq. = 5 - 120 MHz, $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$, $P_{IN} = 0 \text{ dBm}$

Parameter	Frequency	Units	Min.	Typ.	Max.
Insertion Loss 1 (Pin 5 to Pin 1)	5 - 80 MHz	dB	—	0.1	0.4
	80 - 120 MHz			0.3	0.5
Insertion Loss 2 (Pin 5 to Pin 3)	5 - 80 MHz	dB	—	0.2	0.4
	80 - 120 MHz			0.4	0.6
Amplitude Un-Balance	5 - 80 MHz	dB	—	± 0.06	± 0.2
	80 - 120 MHz			± 0.18	± 0.3
Phase Un-Balance	5 - 80 MHz	°	—	± 0.05	± 1.5
	80 - 120 MHz			± 0.10	± 2.0
Input Return Loss (Pin 5)	5 - 80 MHz	dB	19	25	—
	80 - 120 MHz		15	19	

Ordering Information

Part #	Description
MABA-008965-CF1160	2000 piece reel
MABA-008965-CF11TB	customer test board

Reference Application Note **M513** for reel size information.

Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C

1:1 Flux Coupled Balun Transformer 5 - 120 MHz


Rev. V3

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$, $P_{IN} = 0 \text{ dBm}$


Insertion Loss 1 (Pin5 - Pin1)

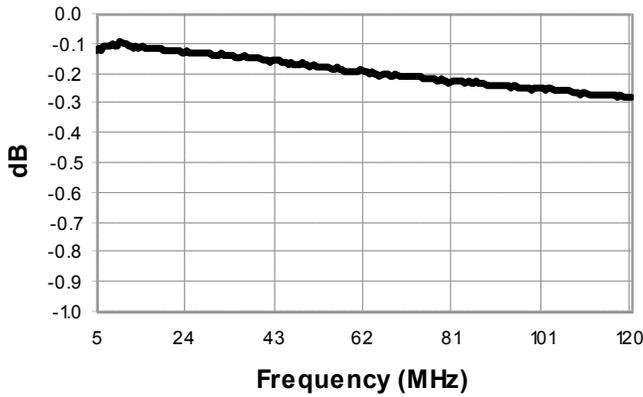


Insertion Loss 2 (Pin5 - Pin3)

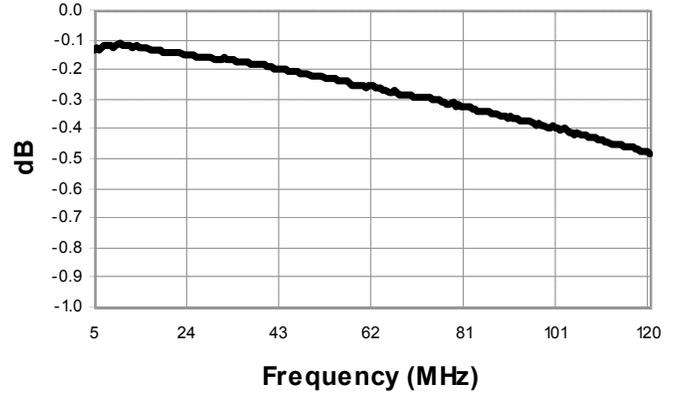


Amplitude Balance

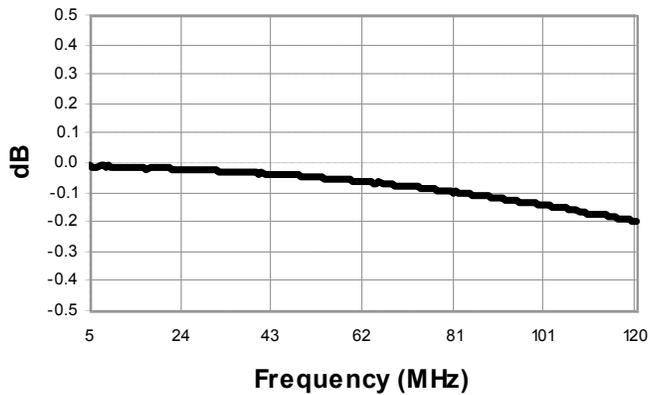



Phase Balance

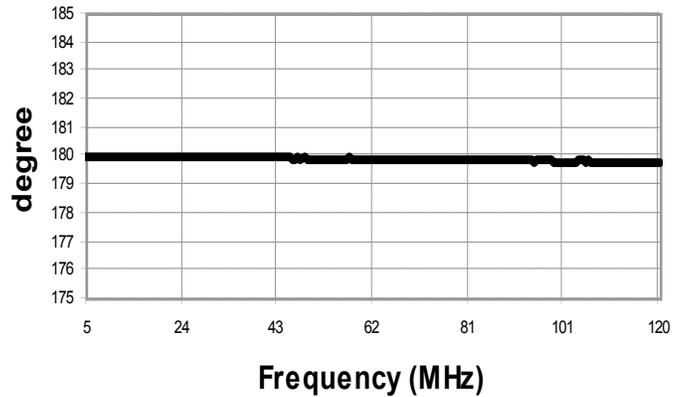



Return Loss: Input

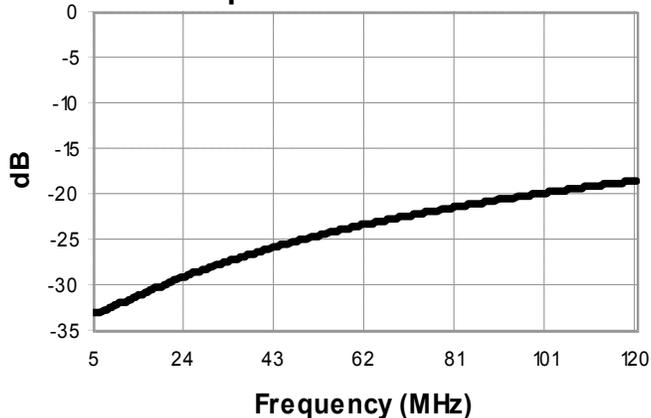

Case Style SM-22A



Recommended PCB



Dimensions are inches [millimeters] ± 0.015 [0.38] unless otherwise specified.

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.