


Low power consumption, Low ESR Cap. Compatible ME6216 Series

General Description

ME6216 series are highly precise, low power consumption, positive voltage regulators manufactured using CMOS technologies. The series provides large currents with a significantly small dropout voltage.

The series is compatible with low ESR ceramic capacitors. The current limiter's foldback circuit also operates as a short protect for the output current limiter and the output pin.


Selection Guide

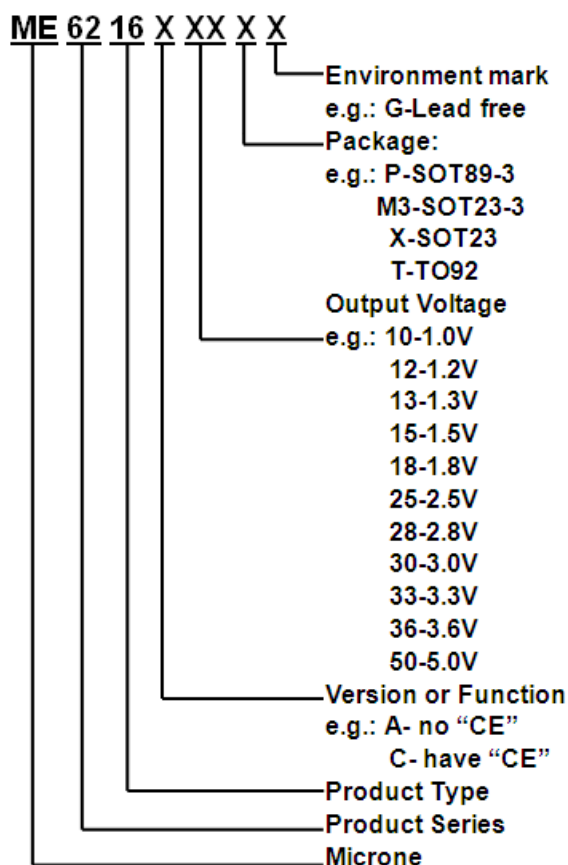


Features

- Highly Accurate: $\pm 1\%$
- Output voltage range: 1.0V~5.0V
- Low power consumption: 5uA(TYP.)
- Large output current: 300mA ($V_{IN}=4.3V, V_{OUT}=3.3V$)
- Input voltage: up to 6 V
- Dropout voltage:
0.11V at 100mA and 0.22V at 200mA
($V_{IN}=4.3V, V_{OUT}=3.3V$)
- Excellent Input Stability
- Be available to regulator and reference voltage
- Packages: SOT23-3, SOT89-3, SOT23, TO-92
- Communication tools
- Mobile phones
- Portable games
- Portable AV systems
- Cameras, Video systems
- Reference voltage sources

Typical Application Circuit

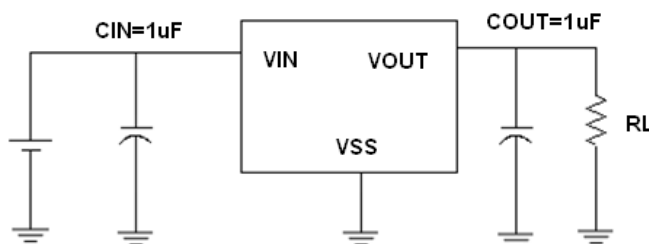

Pin Configuration

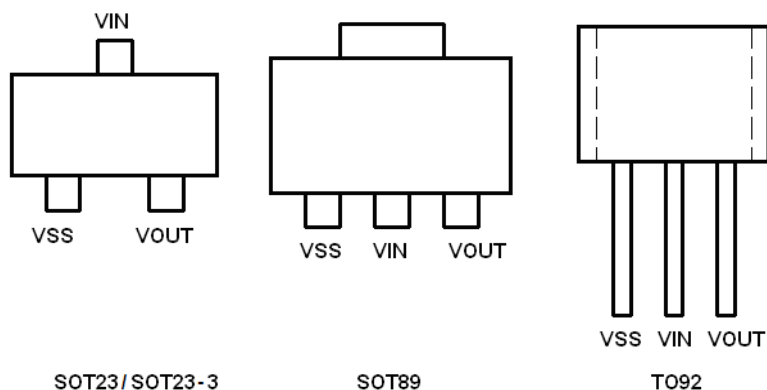

Pin Assignment

ME6216Axx

| Pin | | | | Name | Function |
|---------|---------|-------|-------|------|----------|
| M3 | P | X | T | | |
| SOT23-3 | SOT89-3 | SOT23 | TO-92 | | |
| 1 | 1 | 1 | 1 | VSS | Ground |
| 2 | 3 | 2 | 3 | VOUT | Output |
| 3 | 2 | 3 | 2 | VIN | Input |


ME6216Bxx

| Pin | Name | Function |
|---------|------|----------|
| P | | |
| SOT89-3 | | |
| 2 | VSS | Ground |
| 1 | VOUT | Output |
| 3 | VIN | Input |

Absolute Maximum Ratings

| Parameter | Symbol | Description | Units |
|-------------------------------|-----------|-------------------------------|--------|
| Input Voltage | V_{IN} | 6.5 | V |
| Output Current | I_{OUT} | 500 | mA |
| Output Voltage | V_{OUT} | $V_{SS}-0.3 \sim V_{OUT}+0.3$ | V |
| Power Dissipation | SOT23-3 | P_d | 300 mW |
| | SOT89-3 | P_d | 500 mW |
| | SOT23 | P_d | 300 mW |
| | TO-92 | P_d | 500 mW |
| Operating Ambient Temperature | T_{Opr} | -25 ~ +85 | °C |
| Storage Temperature | T_{stg} | -40 ~ +125 | °C |

Block Diagram

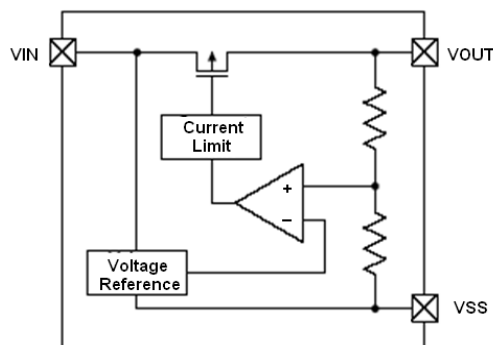

Electrical Characteristics

ME6216-1.0V

($V_{IN}=V_{OUT}+1V$, $C_{IN}=C_{OUT}=1\mu F$, $T_a=25^{\circ}C$ Unless otherwise stated)

| PARAMETER | SYMBOL | CONDITION | MIX | TYP | MAX | UNIT |
|-------------------------------------|--|--|------------------------|--------------------------|------------------------|---------|
| Output Voltage | $V_{OUT(E)}$ (Note 2) | $I_{OUT}=10mA$, $V_{IN}=V_{OUT}+1V$ | $V_{OUT(T)}$ -0.015 | $V_{OUT(T)}$ (Note 1) | $V_{OUT(T)}$ +0.015 | V |
| Input Voltage | V_{IN} | | | | 6 | V |
| Maximum Output Current | $I_{OUT} (max)$ | $V_{IN}= V_{OUT} +1V$ | | 200 | 250 | mA |
| Load Regulation | ΔV_{OUT} | $V_{IN}= V_{OUT} +1V$ $1mA \leq I_{OUT} \leq 100mA$ | | 6 | 10 | mV |
| Dropout Voltage (Note 3) | V_{dif1} | $I_{OUT} =50mA$ | | 280 | 300 | mV |
| | V_{dif2} | $I_{OUT} =80mA$ | | 390 | 410 | mV |
| Supply Current | I_{SS} | $V_{IN}= V_{OUT} +1V$ | | 5 | 8 | μA |
| Line Regulations | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | $I_{OUT} =10mA$ $V_{out}+1V \leq V_{IN} \leq 6V$ | | 0.05 | 0.2 | %/V |
| Power Supply Ripple Rejection Ratio | PSRR | $V_{IN} = [V_{OUT} +1]V$ $+1V_{p-pAC}$ $I_{OUT} =10mA, f=1kHz$ | | 65 | | dB |
| Short Circuit Current | I_{short} | $V_{IN} = V_{OUT} (T)+1V$ $V_{OUT} =V_{SS}$ | | 50 | 80 | mA |
| Over Current Protection | I_{limit} | $V_{IN}= V_{OUT} +1V$ | | 310 | | mA |

ME6216-1.2V

($V_{IN}=V_{OUT}+1V$, $C_{IN}=C_{OUT}=1\mu F$, $T_a=25^{\circ}C$ Unless otherwise stated)

| PARAMETER | SYMBOL | CONDITION | MIX | TYP | MAX | UNIT |
|------------------------|--------------------------|---|------------------------|--------------------------|------------------------|------|
| Output Voltage | $V_{OUT(E)}$ (Note 2) | $I_{OUT}=10mA$, $V_{IN}=V_{OUT}+1V$ | $V_{OUT(T)}$ -0.015 | $V_{OUT(T)}$ (Note 1) | $V_{OUT(T)}$ +0.015 | V |
| Input Voltage | V_{IN} | | | | 6 | V |
| Maximum Output Current | $I_{OUT} (max)$ | $V_{IN}= V_{OUT} +1V$ | | 250 | 300 | mA |
| Load Regulation | ΔV_{OUT} | $V_{IN}= V_{OUT} +1V$ | | 6 | 10 | mV |

| | | | | | | |
|--|---|--|--|------|-----|---------------|
| | | $1\text{mA} \leq I_{\text{OUT}} \leq 100\text{mA}$ | | | | |
| Dropout Voltage (Note 3) | V_{dif1} | $I_{\text{OUT}} = 50\text{mA}$ | | 150 | 170 | mV |
| | V_{dif2} | $I_{\text{OUT}} = 80\text{mA}$ | | 220 | 240 | mV |
| Supply Current | I_{SS} | $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$ | | 5 | 8 | μA |
| Line Regulations | $\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}} \cdot V_{\text{OUT}}}$ | $I_{\text{OUT}} = 10\text{mA}$ $V_{\text{OUT}} + 1\text{V} \leq V_{\text{IN}} \leq 6\text{V}$ | | 0.05 | 0.2 | %/V |
| Power Supply Ripple Rejection Ratio | PSRR | $V_{\text{IN}} = [V_{\text{OUT}} + 1]\text{V}$ $+1\text{Vp-pAC}$ $I_{\text{OUT}} = 10\text{mA}, f = 1\text{kHz}$ | | 65 | | dB |
| Short Circuit Current | I_{short} | $V_{\text{IN}} = V_{\text{OUT}}(\text{T}) + 1\text{V}$ $V_{\text{OUT}} = \text{VSS}$ | | 50 | 80 | mA |
| Over Current Protection | I_{limit} | $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$ | | 310 | | mA |

ME6216-1.3V

($V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}, C_{\text{IN}} = C_{\text{OUT}} = 1\mu\text{F}, T_{\text{a}} = 25^{\circ}\text{C}$ Unless otherwise stated)

| PARAMETER | SYMBOL | CONDITION | MIX | TYP | MAX | UNIT |
|--|---|--|--------------------------------------|--|--------------------------------------|---------------|
| Output Voltage | $V_{\text{OUT}}(\text{E})$ (Note 2) | $I_{\text{OUT}} = 10\text{mA},$ $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$ | $V_{\text{OUT}}(\text{T})$ -0.015 | $V_{\text{OUT}}(\text{T})$ (Note 1) | $V_{\text{OUT}}(\text{T})$ +0.015 | V |
| Input Voltage | V_{IN} | | | | 6 | V |
| Maximum Output Current | $I_{\text{OUT}}(\text{max})$ | $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$ | | 250 | 300 | mA |
| Load Regulation | ΔV_{OUT} | $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$ $1\text{mA} \leq I_{\text{OUT}} \leq 100\text{mA}$ | | 6 | 10 | mV |
| Dropout Voltage (Note 3) | V_{dif1} | $I_{\text{OUT}} = 50\text{mA}$ | | 160 | 180 | mV |
| | V_{dif2} | $I_{\text{OUT}} = 80\text{mA}$ | | 250 | 270 | mV |
| Supply Current | I_{SS} | $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$ | | 5 | 8 | μA |
| Line Regulations | $\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}} \cdot V_{\text{OUT}}}$ | $I_{\text{OUT}} = 10\text{mA}$ $V_{\text{OUT}} + 1\text{V} \leq V_{\text{IN}} \leq 6\text{V}$ | | 0.05 | 0.2 | %/V |
| Power Supply Ripple Rejection Ratio | PSRR | $V_{\text{IN}} = [V_{\text{OUT}} + 1]\text{V}$ $+1\text{Vp-pAC}$ $I_{\text{OUT}} = 10\text{mA}, f = 1\text{kHz}$ | | 65 | | dB |
| Short Circuit Current | I_{short} | $V_{\text{IN}} = V_{\text{OUT}}(\text{T}) + 1\text{V}$ $V_{\text{OUT}} = \text{VSS}$ | | 50 | 80 | mA |
| Over Current Protection | I_{limit} | $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$ | | 340 | | mA |

ME6216-1.5V

($V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}, C_{\text{IN}} = C_{\text{OUT}} = 1\mu\text{F}, T_{\text{a}} = 25^{\circ}\text{C}$ Unless otherwise stated)

| PARAMETER | SYMBOL | CONDITION | MIX | TYP | MAX | UNIT |
|----------------|--|---|--------|--|--------|------|
| Output Voltage | $V_{\text{OUT}}(\text{E})$ (Note 2) | $I_{\text{OUT}} = 10\text{mA},$ $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$ | X 0.99 | $V_{\text{OUT}}(\text{T})$ (Note 1) | X 1.01 | V |

| | | | | | | |
|--|--|---|--|------|-----|---------|
| Input Voltage | V_{IN} | | | | 6 | V |
| Maximum Output Current | $I_{OUT} (max)$ | $V_{IN} = V_{OUT} + 1V$ | | 300 | 350 | mA |
| Load Regulation | ΔV_{OUT} | $V_{IN} = V_{OUT} + 1V$ $1mA \leq I_{OUT} \leq 100mA$ | | 5 | 10 | mV |
| Dropout Voltage (Note 3) | V_{dif1} | $I_{OUT} = 50mA$ | | 120 | 140 | mV |
| | V_{dif2} | $I_{OUT} = 80mA$ | | 190 | 210 | mV |
| Supply Current | I_{SS} | $V_{IN} = V_{OUT} + 1V$ | | 5 | 8 | μA |
| Line Regulations | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | $I_{OUT} = 10mA$ $V_{out} + 1V \leq V_{IN} \leq 6V$ | | 0.05 | 0.2 | %/V |
| Power Supply Ripple Rejection Ratio | PSRR | $V_{IN} = [V_{OUT} + 1]V$ $+1Vp-pAC$ $I_{OUT} = 10mA, f = 1kHz$ | | 65 | | dB |
| Short Circuit Current | I_{short} | $V_{IN} = V_{OUT} (T) + 1V$ $V_{OUT} = VSS$ | | 50 | 80 | mA |
| Over Current Protection | I_{limit} | $V_{IN} = V_{OUT} + 1V$ | | 400 | | mA |

ME6216-1.8V

($V_{IN} = V_{OUT} + 1V, C_{IN} = C_{OUT} = 1\mu F, T_a = 25^{\circ}C$ Unless otherwise stated)

| PARAMETER | SYMBOL | CONDITION | MIX | TYP | MAX | UNIT |
|--|--|---|--------|--------------------------|--------|---------|
| Output Voltage | $V_{OUT}(E)$ (Note 2) | $I_{OUT} = 10mA,$ $V_{IN} = V_{OUT} + 1V$ | X 0.99 | $V_{OUT}(T)$ (Note 1) | X 1.01 | V |
| Input Voltage | V_{IN} | | | | 6 | V |
| Maximum Output Current | $I_{OUT} (max)$ | $V_{IN} = V_{OUT} + 1V$ | | 300 | 350 | mA |
| Load Regulation | ΔV_{OUT} | $V_{IN} = V_{OUT} + 1V$ $1mA \leq I_{OUT} \leq 100mA$ | | 5 | 10 | mV |
| Dropout Voltage (Note 3) | V_{dif1} | $I_{OUT} = 50mA$ | | 100 | 120 | mV |
| | V_{dif2} | $I_{OUT} = 80mA$ | | 150 | 170 | mV |
| Supply Current | I_{SS} | $V_{IN} = V_{OUT} + 1V$ | | 5 | 8 | μA |
| Line Regulations | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | $I_{OUT} = 10mA$ $V_{out} + 1V \leq V_{IN} \leq 6V$ | | 0.05 | 0.2 | %/V |
| Power Supply Ripple Rejection Ratio | PSRR | $V_{IN} = [V_{OUT} + 1]V$ $+1Vp-pAC$ $I_{OUT} = 10mA, f = 1kHz$ | | 65 | | dB |
| Short Circuit Current | I_{short} | $V_{IN} = V_{OUT} (T) + 1V$ $V_{OUT} = VSS$ | | 40 | 80 | mA |
| Over Current Protection | I_{limit} | $V_{IN} = V_{OUT} + 1V$ | | 420 | | mA |

ME6216-2.5V

($V_{IN}=V_{OUT}+1V$, $C_{IN}=C_{OUT}=1\mu F$, $T_a=25^{\circ}C$ Unless otherwise stated)

| PARAMETER | SYMBOL | CONDITION | MIX | TYP | MAX | UNIT |
|-------------------------------------|--|---|--------|--------------------------|--------|---------|
| Output Voltage | $V_{OUT(E)}$ (Note 2) | $I_{OUT}=10mA$, $V_{IN}=V_{OUT}+1V$ | X 0.99 | $V_{OUT(T)}$ (Note 1) | X 1.01 | V |
| Input Voltage | V_{IN} | | | | 6 | V |
| Maximum Output Current | $I_{OUT} (max)$ | $V_{IN}= V_{OUT} +1V$ | | 260 | 300 | mA |
| Load Regulation | ΔV_{OUT} | $V_{IN}= V_{OUT} +1V$ $1mA \leq I_{OUT} \leq 100mA$ | | 9 | 18 | mV |
| Dropout Voltage (Note 3) | V_{dif1} | $I_{OUT} =80mA$ | | 100 | 120 | mV |
| | V_{dif2} | $I_{OUT} =200mA$ | | 260 | 280 | mV |
| Supply Current | I_{SS} | $V_{IN}= V_{OUT} +1V$ | | 5 | 8 | μA |
| Line Regulations | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | $I_{OUT} =10mA$ $V_{out}+1V \leq V_{IN} \leq 6V$ | | 0.05 | 0.2 | %/V |
| Power Supply Ripple Rejection Ratio | PSRR | $V_{IN} = [V_{OUT} +1]V$ $+1Vp-pAC$ $I_{OUT} =10mA, f=1kHz$ | | 65 | | dB |
| Short Circuit Current | I_{short} | $V_{IN} = V_{OUT} (T)+1V$ $V_{OUT} =VSS$ | | 40 | 80 | mA |
| Over Current Protection | I_{limit} | $V_{IN}= V_{OUT} +1V$ | | 420 | | mA |

ME6216-3.0V

($V_{IN}=V_{OUT}+1V$, $C_{IN}=C_{OUT}=1\mu F$, $T_a=25^{\circ}C$ Unless otherwise stated)

| PARAMETER | SYMBOL | CONDITION | MIX | TYP | MAX | UNIT |
|-------------------------------------|--|---|--------|--------------------------|--------|---------|
| Output Voltage | $V_{OUT(E)}$ (Note 2) | $I_{OUT}=10mA$, $V_{IN}=V_{OUT}+1V$ | X 0.99 | $V_{OUT(T)}$ (Note 1) | X 1.01 | V |
| Input Voltage | V_{IN} | | | | 6 | V |
| Maximum Output Current | $I_{OUT} (max)$ | $V_{IN}= V_{OUT} +1V$ | | 300 | 350 | mA |
| Load Regulation | ΔV_{OUT} | $V_{IN}= V_{OUT} +1V$ $1mA \leq I_{OUT} \leq 100mA$ | | 10 | 18 | mV |
| Dropout Voltage (Note 3) | V_{dif1} | $I_{OUT} =80mA$ | | 90 | 110 | mV |
| | V_{dif2} | $I_{OUT} =200mA$ | | 220 | 240 | mV |
| Supply Current | I_{SS} | $V_{IN}= V_{OUT} +1V$ | | 5 | 8 | μA |
| Line Regulations | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | $I_{OUT} =10mA$ $V_{out}+1V \leq V_{IN} \leq 6V$ | | 0.05 | 0.2 | %/V |
| Power Supply Ripple Rejection Ratio | PSRR | $V_{IN} = [V_{OUT} +1]V$ $+1Vp-pAC$ $I_{OUT} =10mA, f=1kHz$ | | 65 | | dB |

| | | | | | | |
|-------------------------|-------------|--|--|-----|----|----|
| Short Circuit Current | I_{short} | $V_{IN} = V_{OUT}(T)+1V$ $V_{OUT} = V_{SS}$ | | 40 | 80 | mA |
| Over Current Protection | I_{limit} | $V_{IN} = V_{OUT} + 1V$ | | 450 | | mA |

ME6216-3.3V

($V_{IN} = V_{OUT} + 1V, C_{IN} = C_{OUT} = 1\mu F, T_a = 25^\circ C$ Unless otherwise stated)

| PARAMETER | SYMBOL | CONDITION | MIX | TYP | MAX | UNIT |
|-------------------------------------|--|--|--------|--------------------------|--------|---------|
| Output Voltage | $V_{OUT}(E)$ (Note 2) | $I_{OUT} = 10mA,$ $V_{IN} = V_{OUT} + 1V$ | X 0.99 | $V_{OUT}(T)$ (Note 1) | X 1.01 | V |
| Input Voltage | V_{IN} | | | | 6 | V |
| Maximum Output Current | $I_{OUT} (max)$ | $V_{IN} = V_{OUT} + 1V$ | | 300 | 350 | mA |
| Load Regulation | ΔV_{OUT} | $V_{IN} = V_{OUT} + 1V$ $1mA \leq I_{OUT} \leq 100mA$ | | 10 | 18 | mV |
| Dropout Voltage (Note 3) | V_{dif1} | $I_{OUT} = 80mA$ | | 80 | 100 | mV |
| | V_{dif2} | $I_{OUT} = 200mA$ | | 220 | 240 | mV |
| Supply Current | I_{SS} | $V_{IN} = V_{OUT} + 1V$ | | 6 | 8 | μA |
| Line Regulations | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | $I_{OUT} = 10mA$ $V_{OUT} + 1V \leq V_{IN} \leq 6V$ | | 0.07 | 0.2 | %/V |
| Power Supply Ripple Rejection Ratio | PSRR | $V_{IN} = [V_{OUT} + 1]V$ $+1V_{p-pAC}$ $I_{OUT} = 10mA, f = 1kHz$ | | 65 | | dB |
| Short Circuit Current | I_{short} | $V_{IN} = V_{OUT}(T)+1V$ $V_{OUT} = V_{SS}$ | | 40 | 80 | mA |
| Over Current Protection | I_{limit} | $V_{IN} = V_{OUT} + 1V$ | | 450 | | mA |

ME6216-5.0V

($V_{IN} = V_{OUT} + 1V, C_{IN} = C_{OUT} = 1\mu F, T_a = 25^\circ C$ Unless otherwise stated)

| PARAMETER | SYMBOL | CONDITION | MIX | TYP | MAX | UNIT |
|-----------------------------|--|--|--------|--------------------------|--------|---------|
| Output Voltage | $V_{OUT}(E)$ (Note 2) | $I_{OUT} = 10mA,$ $V_{IN} = V_{OUT} + 1V$ | X 0.99 | $V_{OUT}(T)$ (Note 1) | X 1.01 | V |
| Input Voltage | V_{IN} | | | | 6 | V |
| Maximum Output Current | $I_{OUT} (max)$ | $V_{IN} = V_{OUT} + 1V$ | | 300 | 400 | mA |
| Load Regulation | ΔV_{OUT} | $V_{IN} = V_{OUT} + 1V$ $1mA \leq I_{OUT} \leq 100mA$ | | 10 | 18 | mV |
| Dropout Voltage (Note 3) | V_{dif1} | $I_{OUT} = 80mA$ | | 65 | 80 | mV |
| | V_{dif2} | $I_{OUT} = 200mA$ | | 160 | 180 | mV |
| Supply Current | I_{SS} | $V_{IN} = V_{OUT} + 1V$ | | 5 | 8 | μA |
| Line Regulations | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | $I_{OUT} = 10mA$ $V_{OUT} + 1V \leq V_{IN} \leq 6V$ | | 0.05 | 0.2 | %/V |

| | | | | | | |
|-------------------------------------|-------------|--|--|-----|----|----|
| Power Supply Ripple Rejection Ratio | PSRR | $V_{IN} = [V_{OUT} + 1]V$ $+1V_{p-pAC}$ $I_{OUT} = 10mA, f = 1kHz$ | | 65 | | dB |
| Short Circuit Current | I_{short} | $V_{IN} = V_{OUT} (T) + 1V$ $V_{OUT} = VSS$ | | 40 | 80 | mA |
| Over Current Protection | I_{limit} | $V_{IN} = V_{OUT} + 1V$ | | 550 | | mA |


Note :

1. $V_{OUT} (T)$: Specified Output Voltage
2. $V_{OUT} (E)$: Effective Output Voltage (i.e. The output voltage when " $V_{OUT} (T) + 1.0V$ " is provided at the Vin pin while maintaining a certain I_{OUT} value.)
3. V_{dif} : $V_{IN1} - V_{OUT} (E)'$
 V_{IN1} : The input voltage when $V_{OUT}(E)'$ appears as input voltage is gradually decreased.
 $V_{OUT} (E)'$ = A voltage equal to 98% of the output voltage whenever an amply stabilized $I_{OUT} \{V_{OUT} (T) + 1.0V\}$ is input.

Type Characteristics (ME6216A33)


(1) Output Voltage VS. Output Current

($V_{IN}=V_{OUT}+1$, $T_a = 25\text{ }^\circ\text{C}$)

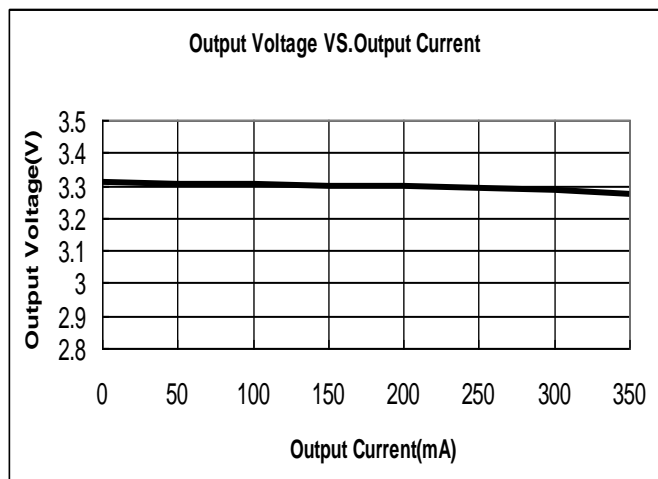


(2) Output Voltage VS. Input Voltage

($T_a = 25\text{ }^\circ\text{C}$)

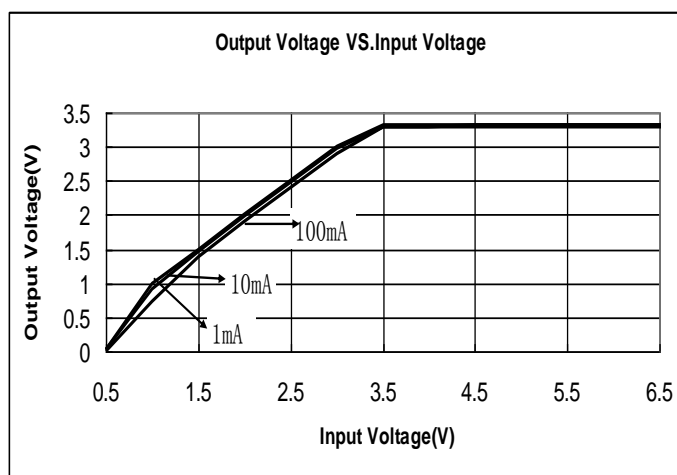


(3) Dropout Voltage VS. Output Current

($V_{IN}=V_{OUT}+1V$, $T_a = 25\text{ }^\circ\text{C}$)

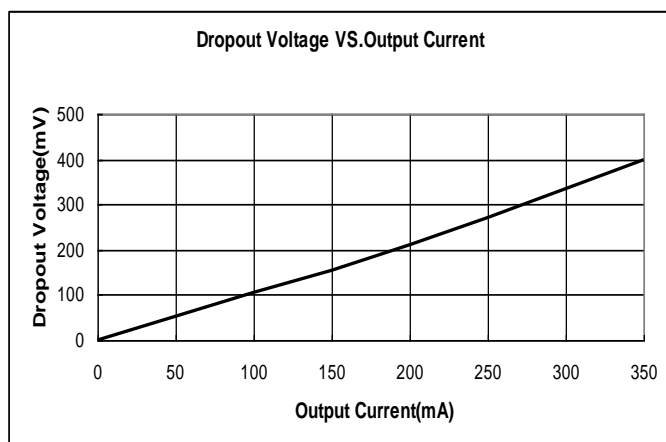


(4) Supply Current VS. Input Voltage

($T_a = 25\text{ }^\circ\text{C}$)

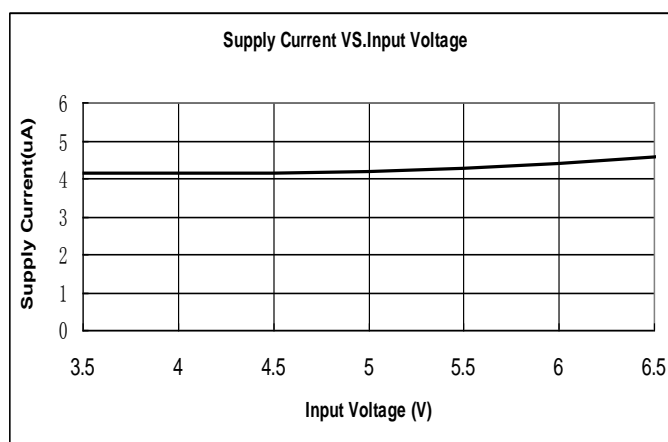


(5) Output Voltage VS. Temperature ($V_{IN}=V_{OUT}+1V$, $I_{OUT} = 10mA$)

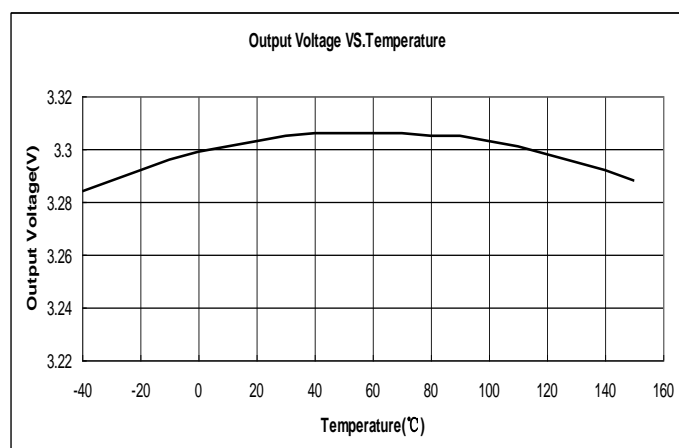


Packaging Information

● SOT89-3

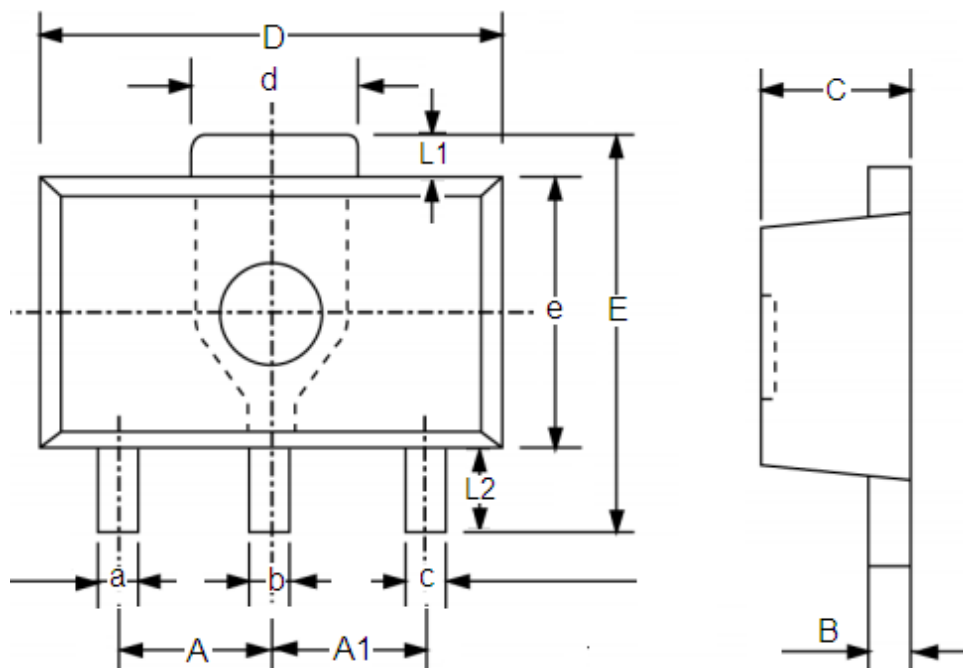


| DIM | Millimeters | | Inches | |
|-----|-------------|------|--------|--------|
| | Min | Max | Min | Max |
| A | 1.4 | 1.6 | 0.0551 | 0.0630 |
| A1 | 1.4 | 1.6 | 0.0551 | 0.0630 |
| a | 0.36 | 0.48 | 0.0142 | 0.0189 |
| b | 0.41 | 0.53 | 0.0161 | 0.0209 |
| c | 0.36 | 0.48 | 0.0142 | 0.0189 |
| d | 1.4 | 1.75 | 0.0551 | 0.0689 |
| B | 0.38 | 0.43 | 0.015 | 0.0169 |
| C | 1.4 | 1.6 | 0.0551 | 0.0630 |
| D | 4.4 | 4.6 | 0.1732 | 0.181 |
| E | - | 4.25 | - | 0.1673 |
| e | 2.4 | 2.6 | 0.0945 | 0.1023 |
| L1 | 0.4 | - | 0.0157 | - |
| L2 | 0.8 | - | 0.0315 | - |

● SOT23-3

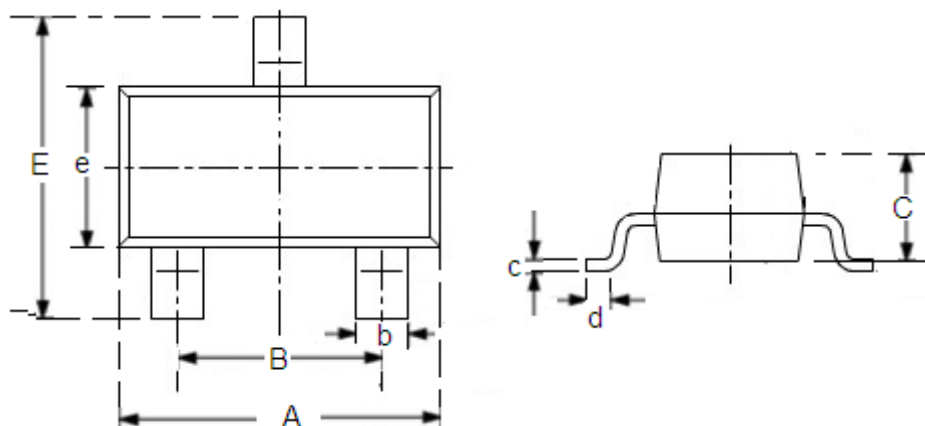


| DIM | Millimeters | | Inches | |
|-----|-------------|------|--------|--------|
| | Min | Max | Min | Max |
| A | 2.7 | 3.1 | 0.1063 | 0.122 |
| B | 1.7 | 2.1 | 0.0669 | 0.0827 |
| b | 0.35 | 0.5 | 0.0138 | 0.0197 |
| C | 1.0 | 1.2 | 0.0394 | 0.0472 |
| c | 0.1 | 0.25 | 0.0039 | 0.0098 |
| d | 0.2 | - | 0.0079 | - |
| E | 2.6 | 3.0 | 0.1023 | 0.1181 |
| e | 1.5 | 1.8 | 0.059 | 0.0708 |

● SOT23

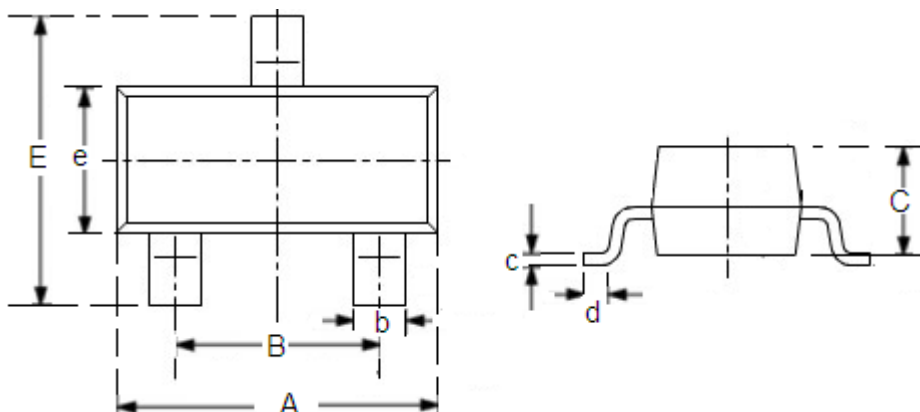

| DIM | Millimeters | | Inches | |
|-----|-------------|------|--------|--------|
| | Min | Max | Min | Max |
| A | 2.7 | 3.1 | 0.1063 | 0.122 |
| B | 1.7 | 2.1 | 0.0669 | 0.0827 |
| b | 0.35 | 0.5 | 0.0138 | 0.0197 |
| C | 1.0 | 1.2 | 0.0394 | 0.0472 |
| c | 0.1 | 0.25 | 0.0039 | 0.0098 |
| d | 0.2 | - | 0.0079 | - |
| E | 2.1 | 2.64 | 0.0827 | 0.1039 |
| e | 1.2 | 1.4 | 0.0472 | 0.0551 |

● TO-92

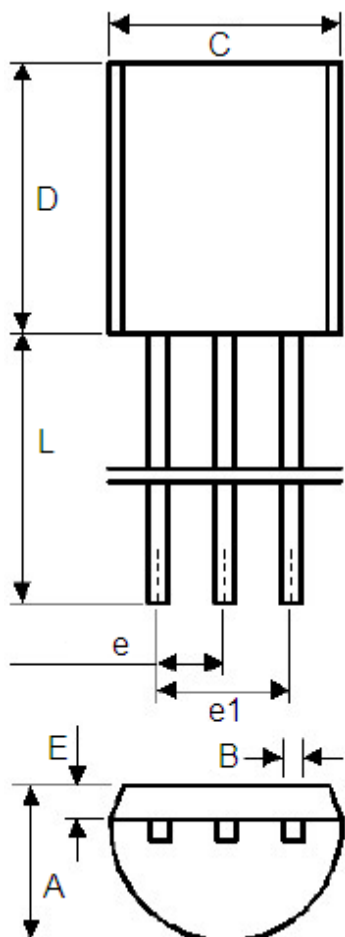

| | Min | Max | Min | Max |
|----|------|------|---------|--------|
| A | 3.4 | 3.8 | 0.13386 | 0.1496 |
| B | 0.3 | 0.5 | 0.0118 | 0.0197 |
| C | 4.4 | 4.8 | 0.1732 | 0.189 |
| D | 4.4 | 4.8 | 0.1732 | 0.189 |
| E | 0.9 | 1.5 | 0.0354 | 0.059 |
| e | 1.17 | 1.37 | 0.046 | 0.0539 |
| e1 | 2.39 | 2.69 | 0.094 | 0.1059 |
| L | 12 | 16 | 0.4724 | 0.6299 |

- The information described herein is subject to change without notice.
- Nanjing Micro One Electronics Inc is not responsible for any problems caused by circuits or diagrams described herein whose related industrial properties, patents, or other rights belong to third parties. The application circuit examples explain typical applications of the products, and do not guarantee the success of any specific mass-production design.
- Use of the information described herein for other purposes and/or reproduction or copying without the express permission of Nanjing Micro One Electronics Inc is strictly prohibited.
- The products described herein cannot be used as part of any device or equipment affecting the human body, such as exercise equipment, medical equipment, security systems, gas equipment, or any apparatus installed in airplanes and other vehicles, without prior written permission of Nanjing Micro One Electronics Inc.
- Although Nanjing Micro One Electronics Inc exerts the greatest possible effort to ensure high quality and reliability, the failure or malfunction of semiconductor products may occur. The user of these products should therefore give thorough consideration to safety design, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue.