



NPN Silicon Transistor

Description

• Audio power amplifier application


Features

- High h_{FE} : $h_{FE} = 100 \sim 320$
- Complementary pair with 2SA1981SF

Ordering Information

Type NO.	Marking	Package Code		
2SC5344SF	FA□	SOT-23F		
			_	

 \square : h_{FE} rank

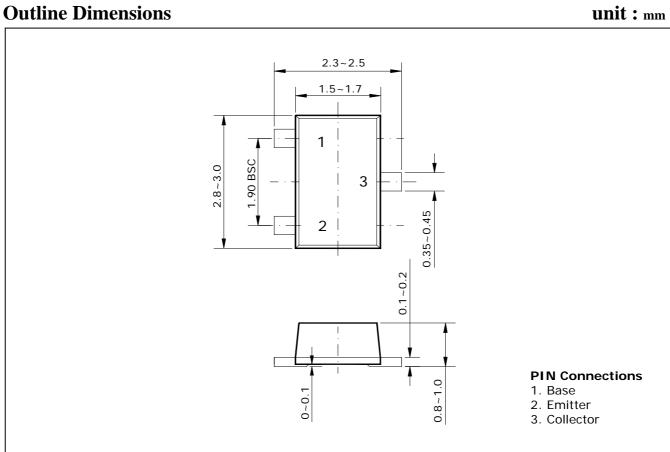

KST-2068-001 1

Absolute maximum ratings

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit	
Collector-Base voltage	V_{CBO}	35	V	
Collector-Emitter voltage	V_{CEO}	30	V	
Emitter-Base voltage	V_{EBO}	5	V	
Collector current	I _C	800	mA	
Collector dissipation	P _C	200	mW	
Junction temperature	T _j	150	°C	
Storage temperature	T_{stg}	-55~150	°C	

Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Collector-Base breakdown voltage	BV _{CBO}	$I_C = 100 \mu A, I_E = 0$	35	-	-	V
Collector-Emitter breakdown voltage	BV _{CEO}	$I_C=1$ mA, $I_B=0$	30	-	-	٧
Emitter-Base breakdown voltage	BV _{EBO}	$I_E=10\mu A,\ I_C=0$	5	-	-	٧
Collector cut-off current	I _{CBO}	$V_{CB} = 35V, I_{E} = 0$	-	-	0.1	μΑ
Emitter cut-off current	I _{EBO}	$V_{EB} = 5V, I_{C} = 0$	-	-	0.1	μΑ
DC current gain	h _{FE} *	$V_{CE} = 1V, I_{C} = 100 \text{mA}$	100	-	320	ı
Collector-Emitter saturation voltage	V _{CE(sat)}	I _C =500mA, I _B =50mA	-	-	0.5	V
Transition frequency	f _T	$V_{CE}=5V$, $I_{C}=10mA$	-	120	-	MHz
Collector output capacitance	C _{ob}	$V_{CB} = 10V, I_{E} = 0, f = 1MHz$	-	13	-	pF

^{*:} h_{FE} rank / O: 100 ~ 200, Y: 160 ~ 320

KST-2068-001 2

Electrical Characteristic Curves

Fig. 1 P_C - T_a




Fig. 3 $I_{C}\;$ - V_{CE}




Fig. 5 h_{FE} - I_C

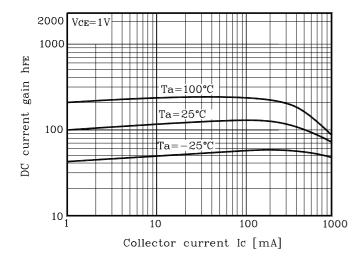


Fig. 2 $I_{C}\;$ - V_{BE}





Fig. 4 $V_{CE(sat)}\,\,$ - $\,\,I_{C}$

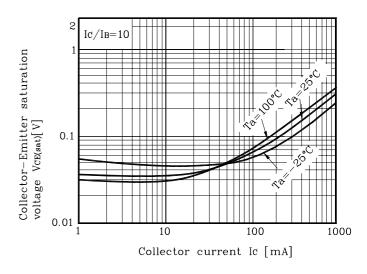

KST-2068-001 3

These AUK products are intended for usage in general electronic equipments (Office and communication equipment, measuring equipment, domestic electrification, etc.).

Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).

AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.

KST-2068-001 4