

Silicon PNP Power Transistor

MJ21193

DESCRIPTION

- Excellent Safe Operating Area
- DC Current Gain-
: $h_{FE} = 25-75 @ I_C = -8A, V_{CE} = -5V$
- Collector-Emitter Saturation Voltage-
: $V_{CE(sat)} = -1.4 V(Max) @ I_C = -8A$
- Complement to the NPN MJ21194
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Designed for high power audio output, disk head positioners and other linear applications.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-400	V
V_{CEO}	Collector-Emitter Voltage	-250	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-16	A
I_B	Base Current	-5	A
P_D	Total Power Dissipation @ $T_C = 25^\circ C$	250	W
T_j	Junction Temperature	200	$^\circ C$
T_{stg}	Storage Temperature	-65~200	$^\circ C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(j-c)}$	Thermal Resistance, Junction to Case	0.7	$^\circ C/W$

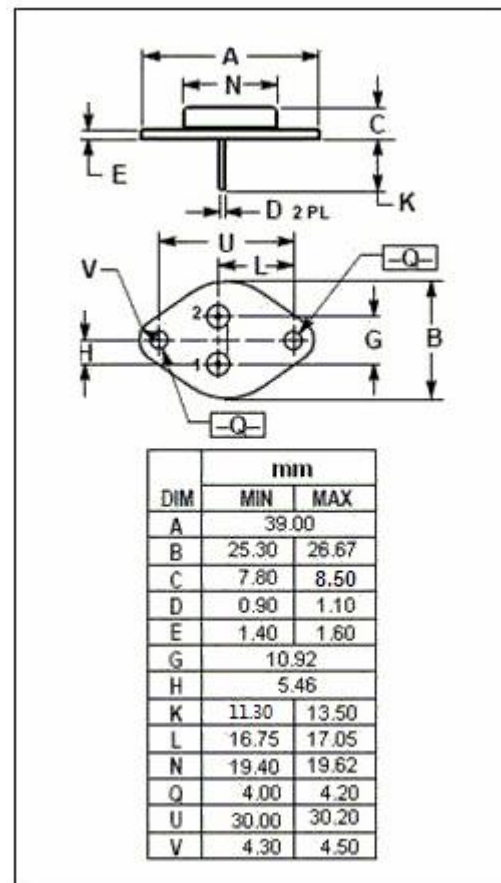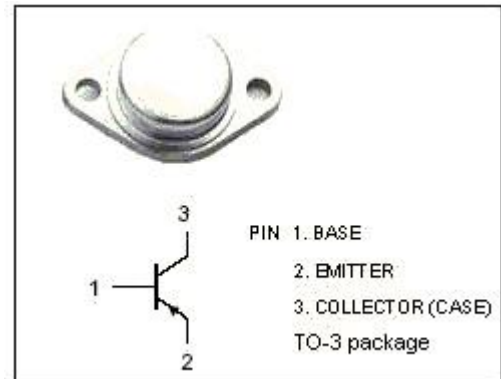

Silicon PNP Power Transistor

MJ21193

ELECTRICAL CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V _{CEO(SUS)}	Collector-Emitter Sustaining Voltage	I _C = -50mA ; I _B = 0	-250		V
V _{CE(sat)-1}	Collector-Emitter Saturation Voltage	I _C = -8A; I _B = -0.8A		-1.4	V
V _{CE(sat)-2}	Collector-Emitter Saturation Voltage	I _C = -16A; I _B = -3.2A		-4.0	V
V _{BE(on)}	Base-Emitter On Voltage	I _C =8A ; V _{CE} = 5V		-2.2	V
I _{CEO}	Collector Cutoff Current	V _{CE} = -200V; V _{BE(off)} = 0		-0.1	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} = -5V; I _C = 0		-0.1	mA
h _{FE-2}	DC Current Gain	I _C = -8A ; V _{CE} = -5V	25	75	
h _{FE-3}	DC Current Gain	I _C = -16A ; V _{CE} = -5V	8		
I _{s/b}	Second Breakdown Collector Current with Base Forward Biased	V _{CE} = -50Vdc, t= 1 s, Nonrepetitive	-5		A
C _{OB}	Output Capacitance	I _E = 0 ; V _{CB} = -10V; f _{test} = -1.0MHz	300		pF
f _T	Current-Gain—Bandwidth Product	I _C = -1A ; V _{CE} = -10V; f _{test} = -1.0MHz	4		MHz

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.