



**NEW!**

# Coupled Inductors-MSD1260




www.DataSheet4U.com  
For SEPIC and other Applications



The excellent coupling coefficient ( $k \geq 0.94$ ) makes the MSD1260 series of coupled inductors ideal for use in SEPIC applications. In SEPIC topologies, the required inductance for each winding in a coupled inductor is half the value needed for two separate inductors, allowing selection of a part with lower DCR and higher current handling.




These parts provide high inductance, high efficiency and excellent current handling in a rugged, low cost part. They are also well suited for use as a VRM inductors in high-current DC-DC converters and VRM/VRD controllers.

They can also be used as two single inductors connected in series or parallel, as a common mode choke or as a 1 : 1 transformer.

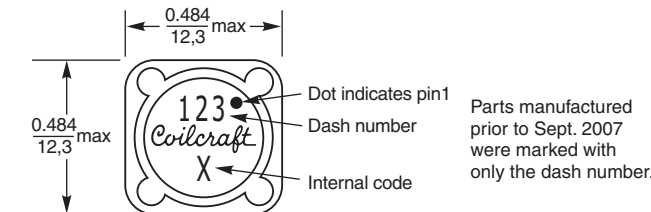

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$

### Recommended Land Pattern

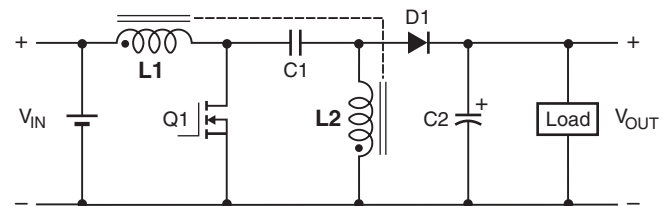

**Typical SEPIC schematic**  
Refer to Application Note, Document 639,  
"Selecting Coupled Inductors for SEPIC Applications"

**Core material** Ferrite

**Terminations** RoHS compliant matte tin over nickel over phos bronze. Other terminations available at additional cost.

**Weight:** 2.8 – 3.2 g

**Ambient temperature** -40°C to +85°C with  $I_{rms}$  current, +85°C to +125°C with derated current

**Storage temperature** Component: -40°C to +125°C.  
Packaging: -40°C to +80°C

**Winding to winding isolation** 500 Vrms

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**  
38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

**Packaging** 500/13" reel; Plastic tape: 24 mm wide, 0.35 mm thick, 16 mm pocket spacing, 6.6 mm pocket depth

**PCB washing** Only pure water or alcohol recommended

**Coilcraft**®

Specifications subject to change without notice.  
Please check our website for latest information.

Document 528-1 Revised 12/05/08

**NEW!**

# Coupled Inductors for SEPIC – MSD1260 Series

Part number <sup>1</sup>	Inductance <sup>2</sup> ( $\mu$ H)	DCR max <sup>3</sup> (Ohms)	SRF typ <sup>4</sup> (MHz)	Isat <sup>5</sup> (A)	Irms(A)	
					both windings <sup>6</sup>	one winding <sup>7</sup>
MSD1260-472ML_	4.7 $\pm$ 20%	0.036	32.0	10.3	3.16	4.47
MSD1260-562ML_	5.6 $\pm$ 20%	0.040	31.0	9.66	3.00	4.24
MSD1260-682ML_	6.8 $\pm$ 20%	0.048	28.0	9.21	2.75	3.88
MSD1260-822ML_	8.2 $\pm$ 20%	0.052	25.0	8.55	2.63	3.72
MSD1260-103ML_	10 $\pm$ 20%	0.060	22.0	7.40	2.45	3.46
MSD1260-123ML_	12 $\pm$ 20%	0.074	21.0	6.86	2.21	3.12
MSD1260-153ML_	15 $\pm$ 20%	0.085	17.6	6.09	2.06	2.92
MSD1260-183ML_	18 $\pm$ 20%	0.097	17.0	5.30	1.93	2.73
MSD1260-223ML_	22 $\pm$ 20%	0.116	15.0	5.01	1.76	2.49
MSD1260-273ML_	27 $\pm$ 20%	0.124	13.6	4.66	1.70	2.41
MSD1260-333ML_	33 $\pm$ 20%	0.134	12.7	4.22	1.64	2.32
MSD1260-393ML_	39 $\pm$ 20%	0.142	11.7	3.80	1.59	2.25
MSD1260-473ML_	47 $\pm$ 20%	0.174	8.7	3.25	1.44	2.03
MSD1260-563ML_	56 $\pm$ 20%	0.198	7.6	3.07	1.35	1.91
MSD1260-683ML_	68 $\pm$ 20%	0.216	6.1	2.83	1.29	1.83
MSD1260-823ML_	82 $\pm$ 20%	0.274	5.3	2.55	1.15	1.62
MSD1260-104ML_	100 $\pm$ 20%	0.322	5.0	2.20	1.06	1.50
MSD1260-124KL_	120 $\pm$ 10%	0.418	4.4	2.05	0.93	1.31
MSD1260-154KL_	150 $\pm$ 10%	0.476	4.0	1.82	0.87	1.23
MSD1260-184KL_	180 $\pm$ 10%	0.536	3.6	1.60	0.82	1.16
MSD1260-224KL_	220 $\pm$ 10%	0.691	3.2	1.51	0.72	1.02
MSD1260-274KL_	270 $\pm$ 10%	0.806	2.8	1.41	0.67	0.95
MSD1260-334KL_	330 $\pm$ 10%	1.09	2.5	1.28	0.57	0.81
MSD1260-394KL_	390 $\pm$ 10%	1.20	2.3	1.16	0.55	0.77
MSD1260-474KL_	470 $\pm$ 10%	1.59	2.1	1.00	0.48	0.67
MSD1260-564KL_	560 $\pm$ 10%	1.81	2.0	0.95	0.45	0.63
MSD1260-684KL_	680 $\pm$ 10%	2.06	1.8	0.88	0.42	0.59
MSD1260-824KL_	820 $\pm$ 10%	2.65	1.5	0.79	0.37	0.52
MSD1260-105KL_	1000 $\pm$ 10%	3.06	1.2	0.69	0.34	0.49

1. When ordering, please specify **termination** and **packaging** codes:

**MSD1260-105KL D**

**Termination:** L = RoHS compliant matte tin over nickel over phos bronze.  
Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or  
S = non-RoHS tin-lead (63/37).

**Packaging:** D = 13" machine-ready reel. EIA-481 embossed plastic  
tape (500 parts per full reel).

B = Less than full reel. In tape, but not machine ready.  
To have a leader and trailer added (\$25 charge), use  
code letter D instead.

- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
  - DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
  - SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
  - DC current, at which the inductance drops 30% (typ) from its value without current. It is the sum of the current flowing in both windings.
  - Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
  - Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
  - Electrical specifications at 25°C.
- Refer to Doc 639 "Selecting Coupled Inductors for SEPIC Applications."  
Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

## Temperature rise calculation based on specified Irms

Winding power loss =  $(I_{L1}^2 + I_{L2}^2) \times \text{DCR}$

Temperature rise ( $\Delta t$ ) = Winding power loss  $\times \frac{55.6^\circ\text{C}}{\text{W}}$

$\Delta t = (I_{L1}^2 + I_{L2}^2) \times \text{DCR} \times \frac{55.6^\circ\text{C}}{\text{W}}$

**Example 1.** MSD1260-153ML (Equal current in each winding)

Winding power loss =  $(2.06^2 + 2.06^2) \times 0.085 = 0.721 \text{ W}$

$\Delta t = 0.721 \text{ W} \times \frac{55.6^\circ\text{C}}{\text{W}} = 40^\circ\text{C}$

**Example 2.** MSD1260-153ML ( $I_{L1} = 2.4 \text{ A}$ ,  $I_{L2} = 1.3 \text{ A}$ )

Winding power loss =  $(2.4^2 + 1.3^2) \times 0.085 = 0.633 \text{ W}$

$\Delta t = 0.633 \text{ W} \times \frac{55.6^\circ\text{C}}{\text{W}} = 35.2^\circ\text{C}$

## Coupled Inductor Core and Winding Loss Calculator

This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. Visit [www.coilcraft.com/coupledloss](http://www.coilcraft.com/coupledloss).

# Coilcraft®

Specifications subject to change without notice.  
Please check our website for latest information.

Document 528-2 Revised 12/05/08




**NEW!**


# Coupled Inductors for SEPIC – MSD1260 Series

www.DataSheet4U.com


## Typical L vs Current

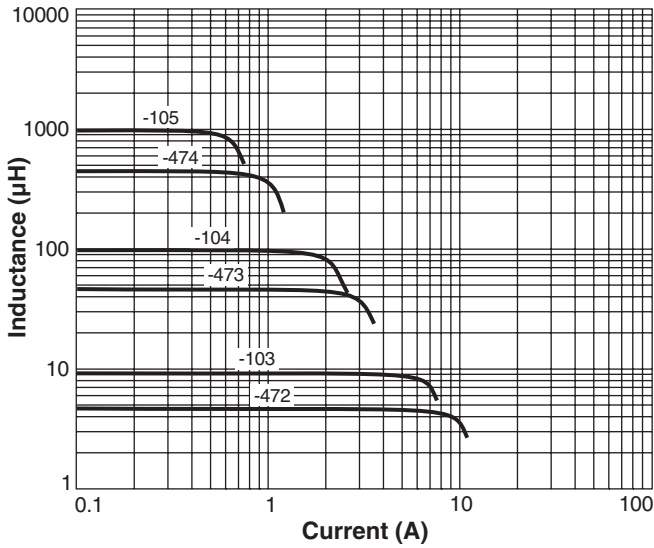

## Typical L vs Frequency

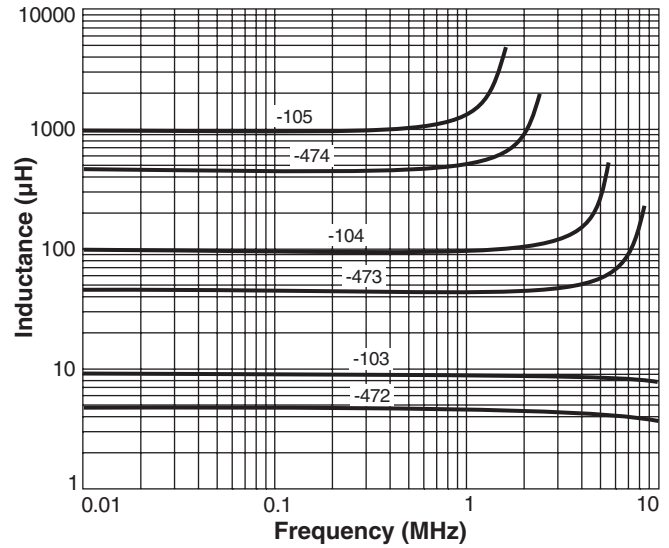

## Current Derating

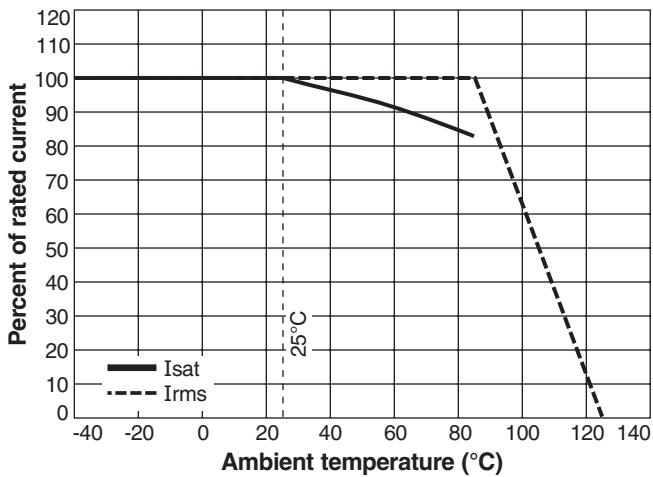

Specifications subject to change without notice.  
Please check our website for latest information.

Document 528-3 Revised 12/05/08