

DDR2 SDRAM VLP RDIMM

MT72HVQ1G72P – 8GB

For component data sheets, refer to Micron's Web site: www.micron.com

Features

- Fits with ATCA form factor
- 240-pin, very low profile registered dual in-line memory module (VLP RDIMM)
- Fast data transfer rates: PC2-4200 or PC2-5300
- 8GB module density (1 Gig x 72)
- Supports ECC error detection and correction
- Register parity function denoted with a "P" in the module part number
- $V_{DD} = V_{DDQ} = +1.8V$
- $V_{DDSPD} = +1.7V$ to $+3.6V$
- JEDEC-standard 1.8V I/O (SSTL_18-compatible)
- Differential data strobe (DQS, DQS#) option
- 4n-bit prefetch architecture
- Quad rank
- Multiple internal device banks for concurrent operation
- Programmable CAS# latency (CL)
- Posted CAS# additive latency (AL)
- WRITE latency = READ latency - 1 t_{CK}
- Programmable burst lengths: 4 or 8
- 64ms, 8,192-cycle refresh
- On-die termination (ODT)
- Serial presence-detect (SPD) with EEPROM
- Gold edge contacts
- Includes heat sink

Figure 1: 240-Pin VLP RDIMM (ATCA Form Factor)

PCB height: 17.9mm (0.704in)



Options

- Operating temperature¹
 - Commercial ($0^{\circ}C \leq T_A \leq +70^{\circ}C$)
 - Industrial ($-40^{\circ}C \leq T_A \leq +85^{\circ}C$)
- Package
 - 240-pin DIMM (Pb-free)
- Frequency/CAS latency²
 - 3ns @ CL = 5 (DDR2-667)
 - 3.75ns @ CL = 4 (DDR2-533)
- PCB height
 - 17.9mm (0.704in)

Marking

None
I
Y
-667
-53E

- Notes: 1. Contact Micron for industrial temperature module offerings.
2. CL = CAS (READ) latency; registered mode will add one clock cycle to CL.

Table 1: Key Timing Parameters

Speed Grade	Industry Nomenclature	Data Rate (MT/s)		t_{RCD} (ns)	t_{RP} (ns)	t_{RC} (ns)
		CL = 5	CL = 4			
-667	PC2-5300	667	533	15	15	55
-53E	PC2-4200	–	533	15	15	55



8GB (x72, ECC, QR) 240-Pin DDR2 SDRAM VLP RDIMM Features

Table 2: Addressing

Parameter	8GB
Refresh count	8K
Row address	16K (A0–A13)
Device bank address	8 (BA0–BA2)
Device page size per bank	1KB
Device configuration	4Gb QuadDie (1 Gig x 4)
Column address	2K (A0–A9, A11)
Module rank address	4 (S0#–S3#)

Table 3: Part Numbers and Timing Parameters – 8GB Modules

Base device: MT47H1G4THT,¹ 4Gb QuadDie DDR2 SDRAM

Part Number ²	Module Density	Configuration	Module Bandwidth	Memory Clock/ Data Rate	Clock Cycles (CL- ^t RCD- ^t RP)
MT72HVQ1G72PY-667__	8GB	1 Gig x 72	5.3 GB/s	3ns/667 MT/s	5-5-5
MT72HVQ1G72PY-53E__	8GB	1 Gig x 72	4.3 GB/s	3.75ns/533 MT/s	4-4-4

- Notes:
1. Data sheets for the monolithic device can be found on Micron's Web site.
 2. All part numbers end with a two-place code (not shown), designating component and PCB revisions. Consult factory for current revision codes. Example: MT72HVQ1G72PY-53EE1.



8GB (x72, ECC, QR) 240-Pin DDR2 SDRAM VLP RDIMM Pin Assignments and Descriptions

Pin Assignments and Descriptions

Table 4: Pin Assignments

240-Pin VLP RDIMM Front							
Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
1	VREF	31	DQ19	61	A4	91	Vss
2	Vss	32	Vss	62	VDDQ	92	DQS5#
3	DQ0	33	DQ24	63	A2	93	DQS5
4	DQ1	34	DQ25	64	VDD	94	Vss
5	Vss	35	Vss	65	Vss	95	DQ42
6	DQS0#	36	DQS3#	66	Vss	96	DQ43
7	DQS0	37	DQS3	67	VDD	97	Vss
8	Vss	38	Vss	68	PAR_IN	98	DQ48
9	DQ2	39	DQ26	69	VDD	99	DQ49
10	DQ3	40	DQ27	70	A10	100	Vss
11	Vss	41	Vss	71	BA0	101	SA2
12	DQ8	42	CB0	72	VDDQ	102	NC
13	DQ9	43	CB1	73	WE#	103	Vss
14	Vss	44	Vss	74	CAS#	104	DQS6#
15	DQS1#	45	DQS8#	75	VDDQ	105	DQS6
16	DQS1	46	DQS8	76	S1#	106	Vss
17	Vss	47	Vss	77	ODT1	107	DQ50
18	RESET#	48	CB2	78	VDDQ	108	DQ51
19	NC	49	CB3	79	Vss	109	Vss
20	Vss	50	Vss	80	DQ32	110	DQ56
21	DQ10	51	VDDQ	81	DQ33	111	DQ57
22	DQ11	52	CKE0	82	Vss	112	Vss
23	Vss	53	VDD	83	DQS4#	113	DQS7#
24	DQ16	54	BA2	84	DQS4	114	DQS7
25	DQ17	55	ERR_OUT	85	Vss	115	Vss
26	Vss	56	VDDQ	86	DQ34	116	DQ58
27	DQS2#	57	A11	87	DQ35	117	DQ59
28	DQS2	58	A7	88	Vss	118	Vss
29	Vss	59	VDD	89	DQ40	119	SDA
30	DQ18	60	A5	90	DQ41	120	SCL


240-Pin VLP RDIMM Back							
Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
121	Vss	151	Vss	181	VDDQ	211	DQS14
122	DQ4	152	DQ28	182	A3	212	DQS14#
123	DQ5	153	DQ29	183	A1	213	Vss
124	Vss	154	Vss	184	VDD	214	DQ46
125	DQS9	155	DQS12	185	CK0	215	DQ47
126	DQS9#	156	DQS12#	186	CK0#	216	Vss
127	Vss	157	Vss	187	VDD	217	DQ52
128	DQ6	158	DQ30	188	A0	218	DQ53
129	DQ7	159	DQ31	189	VDD	219	Vss
130	Vss	160	Vss	190	BA1	220	S2#
131	DQ12	161	CB4	191	VDDQ	221	S3#
132	DQ13	162	CB5	192	RAS#	222	Vss
133	Vss	163	Vss	193	S0#	223	DQS15
134	DQS10	164	DQS17	194	VDDQ	224	DQS15#
135	DQS10#	165	DQS17#	195	ODT0	225	Vss
136	Vss	166	Vss	196	A13	226	DQ54
137	RFU	167	CB6	197	VDD	227	DQ55
138	RFU	168	CB7	198	Vss	228	Vss
139	Vss	169	Vss	199	DQ36	229	DQ60
140	DQ14	170	VDDQ	200	DQ37	230	DQ61
141	DQ15	171	CKE1	201	Vss	231	Vss
142	Vss	172	VDD	202	DQS13	232	DQS16
143	DQ20	173	A15	203	DQS13#	233	DQS16#
144	DQ21	174	A14	204	Vss	234	Vss
145	Vss	175	VDDQ	205	DQ38	235	DQ62
146	DQS11	176	A12	206	DQ39	236	DQ63
147	DQS11#	177	A9	207	Vss	237	Vss
148	Vss	178	VDD	208	DQ44	238	VDDSPD
149	DQ22	179	A8	209	DQ45	239	SA0
150	DQ23	180	A6	210	Vss	240	SA1

Table 5: Pin Descriptions

Symbol	Type	Description
ODT0, ODT1	Input (SSTL_18)	On-die termination: ODT (registered HIGH) enables termination resistance internal to the DDR2 SDRAM. When enabled, ODT is only applied to the following pins: DQ, DQS, DQS#, and CB. The ODT input will be ignored if disabled via the LOAD MODE command.
CK0, CK0#	Input (SSTL_18)	Clock: CK and CK# are differential clock inputs. All address and control input signals are sampled on the crossing of the positive edge of CK and the negative edge of CK#. Output data (DQs and DQS/DQS#) is referenced to the crossings of CK and CK#.
CKE0, CKE1	Input (SSTL_18)	Clock enable: CKE (registered HIGH) activates and CKE (registered LOW) deactivates clocking circuitry on the DDR2 SDRAM.
S0#–S3#	Input (SSTL_18)	Chip select: S# enables (registered LOW) and disables (registered HIGH) the command decoder.
RAS#, CAS#, WE#	Input (SSTL_18)	Command inputs: RAS#, CAS#, and WE# (along with S#) define the command being entered.
BA0–BA2	Input (SSTL_18)	Bank address inputs: BA0–BA2 define to which device bank an ACTIVE, READ, WRITE, or PRECHARGE command is being applied. BA0–BA2 define which mode register, including MR, EMR, EMR(2), and EMR(3), is loaded during the LOAD MODE command.
A0–A13	Input (SSTL_18)	Address inputs: Provide the row address for ACTIVE commands, and the column address and auto precharge bit (A10) for READ/WRITE commands, to select one location out of the memory array in the respective bank. A10 sampled during a PRECHARGE command determines whether the PRECHARGE applies to one device bank (A10 LOW, device bank selected by BA0–BA2) or all device banks (A10 HIGH). The address inputs also provide the op-code during a LOAD MODE command. A14–A15 are connected for parity.
PAR_IN	Input (SSTL_18)	Parity bit for the address and control bus.
SCL	Input (SSTL_18)	Serial clock for presence-detect: SCL is used to synchronize the presence-detect data transfer to and from the module.
SA0–SA2	Input (SSTL_18)	Presence-detect address inputs: These pins are used to configure the presence-detect device.
RESET#	Input (LVCMOS)	Asynchronously forces all registered outputs LOW when RESET# is LOW. This signal can be used during power-up to ensure that CKE is LOW and DQs are High-Z.
DQS0–DQS17, DQS0#–DQS17#	I/O (SSTL_18)	Data strobe: Output with read data, input with write data for source synchronous operation. Edge-aligned with read data, center-aligned with write data. DQS# is only used when differential data strobe mode is enabled via the LOAD MODE command.
DQ0–DQ63	I/O (SSTL_18)	Data input/output: Bidirectional data bus.
CB0–CB7	I/O (SSTL_18)	Check bits.
SDA	I/O (SSTL_18)	Serial presence-detect data: SDA is a bidirectional pin used to transfer addresses and data into and out of the presence-detect portion of the module.
ERR_OUT	Output (open drain)	Parity error found on the address and control bus.
VDD/VDDQ	Supply	Power supply: 1.8V ±0.1V.
VREF	Supply	SSTL_18 reference voltage.
Vss	Supply	Ground.
VDDSPD	Supply	Serial EEPROM positive power supply: +1.7V to +3.6V.
NC	–	No connect: These pins should be left unconnected.
RFU	–	Reserved for future use.

Functional Block Diagram

Figure 2: Functional Block Diagram

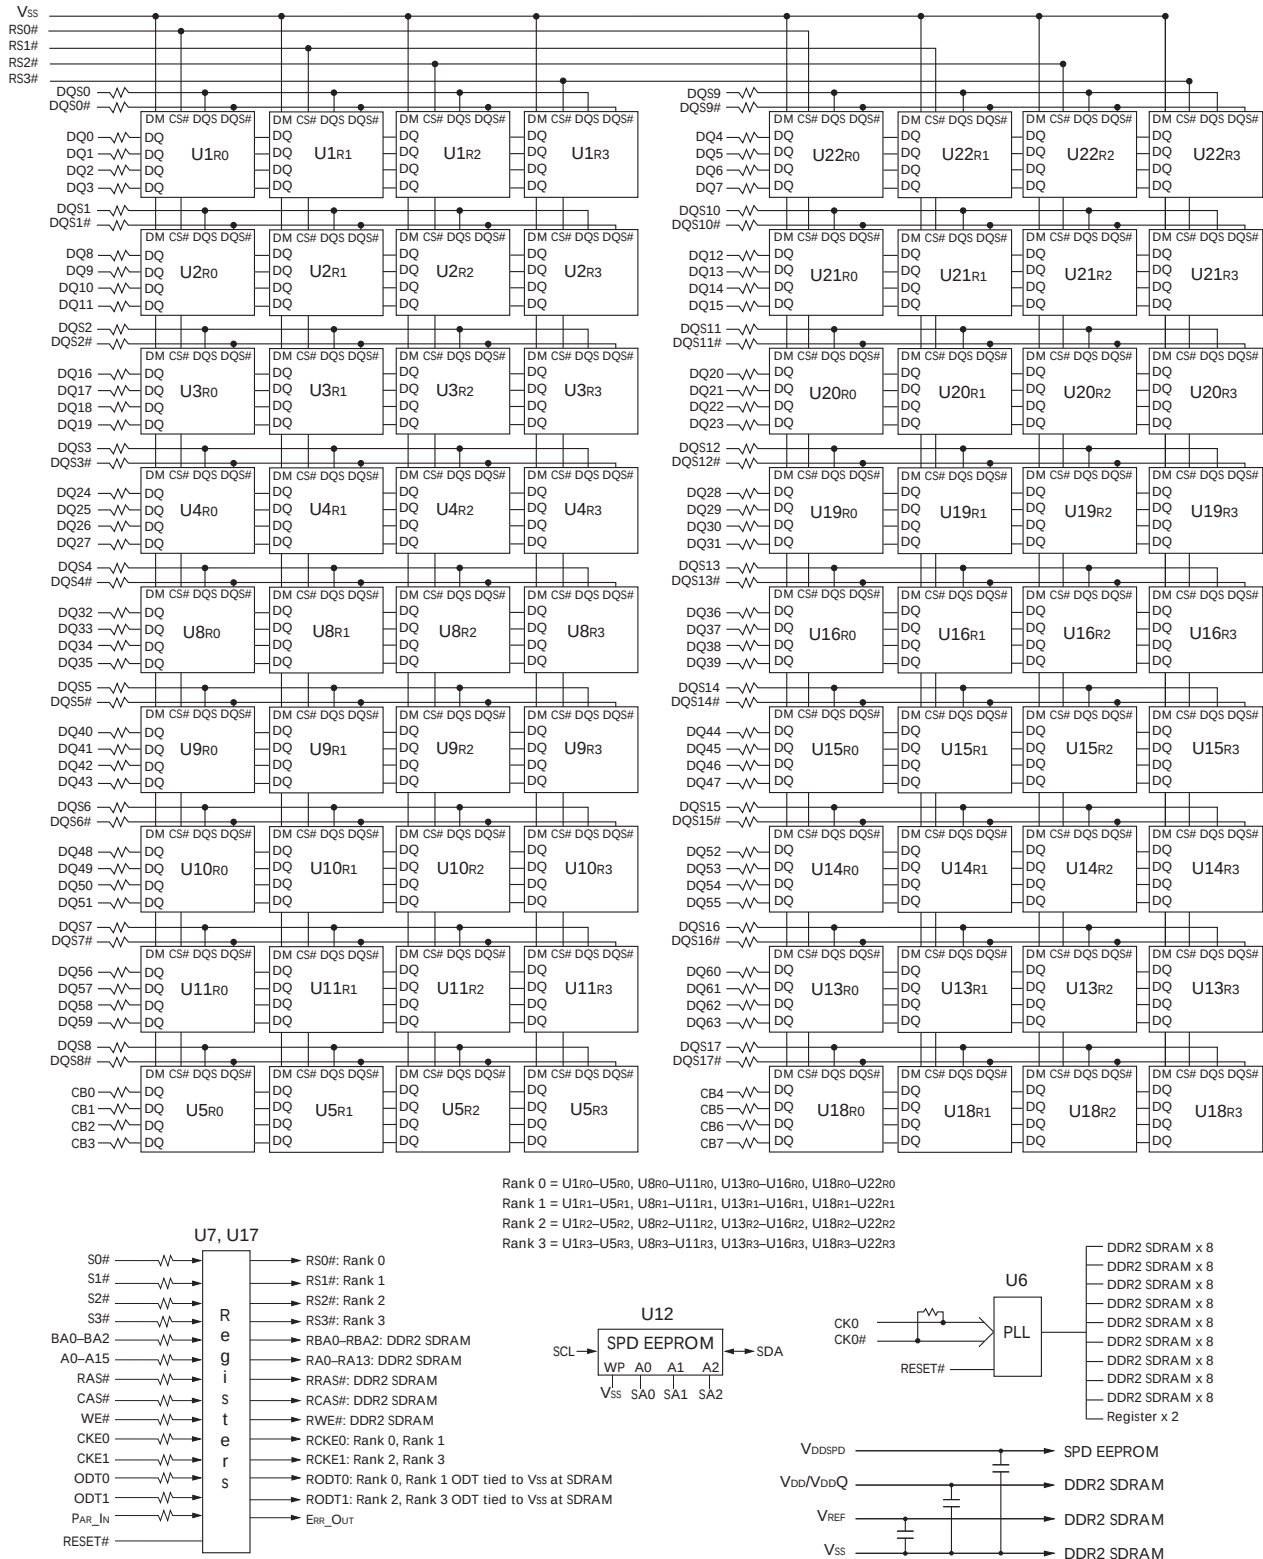

General Description

The MT72HVQ1G72P DDR2 SDRAM module is a high-speed, CMOS dynamic random-access 8GB memory module, organized in a x72 configuration. This DDR2 SDRAM module is internally configured as an 8-bank 4Gb QuadDie DDR2 SDRAM device.

DDR2 SDRAM modules use double data rate architecture to achieve high-speed operation. The double data rate architecture is essentially a $4n$ -prefetch architecture with an interface designed to transfer two data words per clock cycle at the I/O pins. A single read or write access for the DDR2 SDRAM module effectively consists of a single $4n$ -bit-wide, one-clock-cycle data transfer at the internal DRAM core and four corresponding n -bit-wide, one-half-clock-cycle data transfers at the I/O pins.

A bidirectional data strobe (DQS, DQS#) is transmitted externally, along with data, for use in data capture at the receiver. DQS is a strobe transmitted by the DDR2 SDRAM device during READs and by the memory controller during WRITEs. DQS is edge-aligned with data for READs and center-aligned with data for WRITEs.

DDR2 SDRAM modules operate from a differential clock (CK and CK#); the crossing of CK going HIGH and CK# going LOW will be referred to as the positive edge of CK. Commands are registered at every positive edge of CK. Input data is registered on both edges of DQS, and output data is referenced to both edges of DQS, as well as to both edges of CK.

Register and PLL Operation

DDR2 SDRAM modules operate in registered mode, where the command/address input signals are latched in the registers on the rising clock edge and sent to the DDR2 SDRAM devices on the following rising clock edge (data access is delayed by one clock cycle). A phase-lock loop (PLL) on the module receives and redrives the differential clock signals (CK, CK#) to the DDR2 SDRAM devices. The register(s) and PLL reduce address, command, control, and clock signal loading by isolating DRAM from the system controller. PLL clock timing is defined by JEDEC specifications and ensured by use of the JEDEC clock reference board. Registered mode will add one clock cycle to CL.

Serial Presence-Detect Operation

DDR2 SDRAM modules incorporate serial presence-detect (SPD). The SPD function is implemented using a 2,048-bit EEPROM. This nonvolatile storage device contains 256 bytes. The first 128 bytes are programmed by Micron to identify the module type and various SDRAM organizations and timing parameters. The remaining 128 bytes of storage are available for use by the customer. System READ/WRITE operations between the master (system logic) and the slave EEPROM device occur via a standard I²C bus using the DIMM's SCL (clock) and SDA (data) signals, together with SA (2:0), which provide eight unique DIMM/EEPROM addresses. Write protect (WP) is tied to VSS on the module, permanently disabling hardware write protect.

Electrical Specifications

Stresses greater than those listed in Table 6 may cause permanent damage to the module. This is a stress rating only, and functional operation of the module at these or any other conditions outside those indicated in the device data sheet are not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Table 6: Absolute Maximum Ratings

Symbol	Parameter	Min	Max	Units
V _{DD} /V _{DDQ}	V _{DD} /V _{DDQ} supply voltage relative to V _{SS}	−0.5	+2.3	V
V _{IN} , V _{OUT}	Voltage on any pin relative to V _{SS}	−0.5	+2.3	V
I _I	Input leakage current; Any input 0V ≤ V _{IN} ≤ V _{DD} ; V _{REF} input 0V ≤ V _{IN} ≤ 0.95V (All other pins not under test = 0V)	−10	+10	μA
	Address inputs RAS#, CAS#, WE#, S#, CKE, ODT, BA			
	CK, CK#	−250	+250	
I _{OZ}	Output leakage current; 0V ≤ V _{OUT} ≤ V _{DDQ} ; DQs and ODT are disabled	−20	+20	μA
I _{VREF}	V _{REF} leakage current; V _{REF} = valid V _{REF} level	−144	+144	μA
T _A	Module ambient operating temperature			
	Commercial	0	+70	°C
	Industrial	−40	+85	°C
T _C ¹	DDR2 SDRAM component case operating temperature ²			
	Commercial	0	+85	°C
	Industrial	−40	+95	°C

- Notes: 1. The refresh rate is required to double when 85°C < T_C ≤ 95°C.
2. For further information, refer to technical note [TN-00-08: Thermal Applications](#) available on Micron's Web site.

Input Capacitance

Micron encourages designers to simulate the performance of the module to achieve optimum values. Simulations are significantly more accurate and realistic than a gross estimation of module capacitance when inductance and delay parameters associated with trace lengths are used in simulations. JEDEC modules are currently designed using simulations to close timing budgets.

Component Timing and Operating Conditions

Recommended AC operating conditions are given in the DDR2 component data sheets. Component specifications are available on Micron's Web site. Module speed grades correlate with component speed grades as, shown in Table 7.

Table 7: Module and Component Speed Grades

Module Speed Grade	Component Speed Grade
−667	−3
−53E	−37E

I_{DD} Specifications

Table 8: DDR2 I_{DD} Specifications and Conditions – 8GB

Values shown for MT47H1G4THT DDR2 SDRAM only and are computed from values specified in the monolithic component data sheet

Parameter/Condition	Symbol	-667	-53E	Units
Operating one bank active-precharge current: $t_{CK} = t_{CK} (I_{DD})$, $t_{RC} = t_{RC} (I_{DD})$, $t_{RAS} = t_{RAS} \text{ MIN} (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching	I _{DD0}	2,592	2,322	mA
Operating one bank active-read-precharge current: I _{OUT} = 0mA; BL = 4, CL = CL (I _{DD}), AL = 0; $t_{CK} = t_{CK} (I_{DD})$, $t_{RC} = t_{RC} (I_{DD})$, $t_{RAS} = t_{RAS} \text{ MIN} (I_{DD})$, $t_{RCD} = t_{RCD} (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data pattern is same as I _{DD4W}	I _{DD1}	2,852	2,772	mA
Precharge power-down current: All device banks idle; $t_{CK} = t_{CK} (I_{DD})$; CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating	I _{DD2P}	594	594	mA
Precharge quiet standby current: All device banks idle; $t_{CK} = t_{CK} (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are stable; Data bus inputs are floating	I _{DD2Q}	1,782	1,782	mA
Precharge standby current: All device banks idle; $t_{CK} = t_{CK} (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are switching; Data bus inputs are switching	I _{DD2N}	1,782	1,782	mA
Active power-down current: All device banks open; $t_{CK} = t_{CK} (I_{DD})$; CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating	I _{DD3P}	1,008	1,008	mA
		648	648	mA
Active standby current: All device banks open; $t_{CK} = t_{CK} (I_{DD})$, $t_{RAS} = t_{RAS} \text{ MAX} (I_{DD})$, $t_{RP} = t_{RP} (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching	I _{DD3N}	2,052	1,872	mA
Operating burst write current: All device banks open; Continuous burst writes; BL = 4, CL = CL (I _{DD}), AL = 0; $t_{CK} = t_{CK} (I_{DD})$, $t_{RAS} = t_{RAS} \text{ MAX} (I_{DD})$, $t_{RP} = t_{RP} (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching	I _{DD4W}	3,222	3,042	mA
Operating burst read current: All device banks open; Continuous burst reads; I _{OUT} = 0mA; BL = 4, CL = CL (I _{DD}), AL = 0; $t_{CK} = t_{CK} (I_{DD})$, $t_{RAS} = t_{RAS} \text{ MAX} (I_{DD})$, $t_{RP} = t_{RP} (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching	I _{DD4R}	3,222	3,042	mA
Burst refresh current: $t_{CK} = t_{CK} (I_{DD})$; REFRESH command at every $t_{RFC} (I_{DD})$ interval; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching	I _{DD5}	4,932	4,842	mA
Self refresh current: CK and CK# at 0V; CKE ≤ 0.2V; Other control and address bus inputs are floating; Data bus inputs are floating	I _{DD6}	594	594	mA
Operating bank interleave read current: All device banks interleaving reads; I _{OUT} = 0mA; BL = 4, CL = CL (I _{DD}), AL = $t_{RCD} (I_{DD}) - 1 \times t_{CK} (I_{DD})$; $t_{CK} = t_{CK} (I_{DD})$, $t_{RC} = t_{RC} (I_{DD})$, $t_{RRD} = t_{RRD} (I_{DD})$, $t_{RCD} = t_{RCD} (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are stable during deselections; Data bus inputs are switching	I _{DD7}	6,102	5,922	mA

Register and PLL Specifications

Table 9: Register Specifications
SSTU32868 devices or equivalent JESD82-14

Parameter	Symbol	Pins	Condition	Min	Max	Units
DC high-level input voltage	V _{IH} (DC)	Address, control, command	SSTL_18	V _{REF} (DC) + 125	V _{DDQ} + 250	mV
DC low-level input voltage	V _{IL} (DC)	Address, control, command	SSTL_18	V _{SS}	V _{REF} (DC) - 125	mV
AC high-level input voltage	V _{IH} (AC)	Address, control, command	SSTL_18	V _{REF} (DC) + 250	V _{DDQ}	mV
AC low-level input voltage	V _{IL} (AC)	Address, control, command	SSTL_18	V _{SS}	V _{REF} (DC) - 250	mV
Output high voltage	V _{OH}	Parity output	LVC MOS	1.2	–	V
Output low voltage	V _{OL}	Parity output	LVC MOS	–	+0.5	V
Input current	I _I	All pins	V _I = V _{DDQ} or V _{SSQ}	–5	+5	μA
Static standby	I _{DD}	All pins	RESET# = V _{SSQ} (I _O = 0)	–	+100	μA
Static operating	I _{DD}	All pins	RESET# = V _{SSQ} ; V _I = V _{IH} (AC) or V _{IL} (DC) I _O = 0	–	+80	mA
Dynamic operating (clock tree)	I _{DDD}	n/a	RESET# = V _{DD} , V _I = V _{IH} (AC) or V _{IL} (AC), I _O = 0; CK and CK# switching 50% duty cycle	–	Varies by manufacturer	μA
Dynamic operating (per each input)	I _{DDD}	n/a	RESET# = V _{DD} , V _I = V _{IH} (AC) or V _{IL} (AC), I _O = 0; CK and CK# switching 50% duty cycle; One data input switching at ^t CK/2, 50% duty cycle	–	Varies by manufacturer	μA
Input capacitance (per device, per pin)	C _I	All inputs except RESET#	V _I = V _{REF} ±250mV; V _{DDQ} = 1.8V	2.5	4	pF
Input capacitance (per device, per pin)	C _I	RESET#	V _I = V _{DDQ} or V _{SSQ}	–	Varies by manufacturer	pF

Notes: 1. Timing and switching specifications for the register listed above are critical for proper operation of the DDR2 SDRAM registered DIMMs. These are meant to be a subset of the parameters for the specific device used on the module. Detailed information for this register is available in JEDEC standard JESD82.

Table 10: PLL Specifications
CU877 device or equivalent JESD82-8.18

Parameter	Symbol	Pins	Condition	Min	Max	Units
DC high-level input voltage	V _{IH}	RESET#	LVC MOS	0.65 × V _{DD}	–	V
DC low-level input voltage	V _{IL}	RESET#	LVC MOS	–	0.35 × V _{DD}	V
Input voltage (limits)	V _{IN}	RESET#, CK, CK#		–0.3	V _{DDQ} + 0.3	V
DC high-level input voltage	V _{IH}	CK, CK#	Differential input	0.65 × V _{DD}	–	V
DC low-level input voltage	V _{IL}	CK, CK#	Differential input	–	0.35 × V _{DD}	V
Input differential-pair cross voltage	V _{IX}	CK, CK#	Differential input	(V _{DDQ} /2) - 0.15	(V _{DDQ} /2) + 0.15	V
Input differential voltage	V _{ID} (DC)	CK, CK#	Differential input	0.3	V _{DDQ} + 0.4	V
Input differential voltage	V _{ID} (AC)	CK, CK#	Differential input	0.6	V _{DDQ} + 0.4	V
Input current	I _I	RESET#	V _I = V _{DDQ} or V _{SSQ}	–10	+10	μA
		CK, CK#	V _I = V _{DDQ} or V _{SSQ}	–250	+250	μA
Output disabled current	I _{ODL}		RESET# = V _{SSQ} ; V _I = V _{IH} (AC) or V _{IL} (DC)	100	–	μA
Static supply current	I _{DDL}		CK = CK# = LOW	–	+500	μA
Dynamic supply	I _{DD}	n/a	CK, CK# = 410 MHz, all outputs open (not connected to PCB)	–	+300	mA
Input capacitance	C _{IN}	Each input	V _I = V _{DDQ} or V _{SSQ}	2	3	pF

Table 11: PLL Clock Driver Timing Requirements and Switching Characteristics

Parameter	Symbol	Min	Max	Units
Stabilization time	t _L	–	15	μs
Input clock slew rate	slr(i)	1	4	V/ns
SSC modulation frequency		30	33	kHz
SSC clock input frequency deviation		0	–0.5	%
PLL loop bandwidth (–3dB from unity gain)		2	–	MHz

Notes: 1. PLL timing and switching specifications are critical for proper operation of the DDR2 DIMM. This is a subset of parameters for the specific PLL used. Detailed PLL information is available in JEDEC standard JESD82.

Serial Presence-Detect

Table 12: Serial Presence-Detect EEPROM DC Operating Conditions

All voltages referenced to V_{SS}

Parameter/Condition	Symbol	Min	Max	Units
Supply voltage	V _{DDSPD}	1.7	3.6	V
Input high voltage: Logic 1; All inputs	V _{IH}	V _{DDSPD} × 0.7	V _{DDSPD} + 0.5	V
Input low voltage: Logic 0; All inputs	V _{IL}	−0.6	V _{DDSPD} × 0.3	V
Output low voltage: I _{OUT} = 3mA	V _{OL}	−	0.4	V
Input leakage current: V _{IN} = GND to V _{DD}	I _{LI}	0.1	3	μA
Output leakage current: V _{OUT} = GND to V _{DD}	I _{LO}	0.05	3	μA
Standby current	I _{SB}	1.6	4	μA
Power supply current, READ: SCL clock frequency = 100 kHz	I _{CCR}	0.4	1	mA
Power supply current, WRITE: SCL clock frequency = 100 kHz	I _{CCW}	2	3	mA

Table 13: Serial Presence-Detect EEPROM AC Operating Conditions

All voltages referenced to V_{SS}

Parameter/Condition	Symbol	Min	Max	Units	Notes
SCL LOW to SDA data-out valid	t _{AA}	0.2	0.9	μs	1
Time the bus must be free before a new transition can start	t _{BUF}	1.3	−	μs	
Data-out hold time	t _{DH}	200	−	ns	
SDA and SCL fall time	t _F	−	300	ns	2
Data-in hold time	t _{HD:DAT}	0	−	μs	
Start condition hold time	t _{HD:STA}	0.6	−	μs	
Clock HIGH period	t _{HIGH}	0.6	−	μs	
Noise suppression time constant at SCL, SDA inputs	t _I	−	50	ns	
Clock LOW period	t _{LOW}	1.3	−	μs	
SDA and SCL rise time	t _R	−	0.3	μs	2
SCL clock frequency	f _{SCL}	−	400	kHz	
Data-in setup time	t _{SU:DAT}	100	−	ns	
Start condition setup time	t _{SU:STA}	0.6	−	μs	3
Stop condition setup time	t _{SU:STO}	0.6	−	μs	
WRITE cycle time	t _{WRC}	−	10	ms	4

- Notes:
1. To avoid spurious start and stop conditions, a minimum delay is placed between SCL = 1 and the falling or rising edge of SDA.
 2. This parameter is sampled.
 3. For a restart condition, or following a WRITE cycle.
 4. The SPD EEPROM WRITE cycle time (t_{WRC}) is the time from a valid stop condition of a write sequence to the end of the EEPROM internal ERASE/PROGRAM cycle. During the WRITE cycle, the EEPROM bus interface circuit is disabled, SDA remains HIGH due to pull-up resistance, and the EEPROM does not respond to its slave address.

Table 14: Serial Presence-Detect Matrix

Byte	Description	Entry (Version)	8GB
0	Number of SPD bytes used by Micron	128	80
1	Total number of bytes in SPD device	256	08
2	Fundamental memory type	DDR2 SDRAM	08
3	Number of row addresses on SDRAM	14	0E
4	Number of column addresses on SDRAM	11	0B
5	DIMM height and module ranks	17.9mm, quad rank	13
6	Module data width	72	48
7	Reserved	0	00
8	Module voltage interface levels	SSTL 1.8V	05
9	SDRAM cycle time, t_{CK} (CL = MAX value, see byte 18)	-667 -53E	30 3D
10	SDRAM access from clock, t_{AC} (CL = MAX value, see byte 18)	-667 -53E	45 50
11	Module configuration type	ECC and parity	06
12	Refresh rate/type	7.81μs/SELF	82
13	SDRAM device width (primary SDRAM)	4	04
14	Error-checking SDRAM data width	4	04
15	Reserved	0	00
16	Burst lengths supported	4, 8	0C
17	Number of banks on SDRAM device	8	08
18	CAS latencies supported	-667 (5, 4, 3) -53E (4, 3)	38 18
19	Module thickness	–	04
20	DDR2 DIMM type	Registered DIMM	01
21	SDRAM module attributes	1 PLL, 2 Reg	05
22	SDRAM device attributes: weak driver (01) or weak driver and 50Ω ODT (03)	-667 -53E	03 01
23	SDRAM cycle time, t_{CK} , MAX CL - 1	-667 -53E	3D 50
24	SDRAM access from CK, t_{AC} , MAX CL - 1	-667 -53E	45 50
25	SDRAM access from CK, t_{AC} , MAX CL - 1	-667 -53E	50 00
26	SDRAM access from CK, t_{AC} , MAX CL - 2	-667 -53E	45 00
27	MIN row precharge time, t_{RP}	–	3C
28	MIN row active-to-row active, t_{RRD}	–	1E
29	MIN RAS#-to-CAS# delay, t_{RCD}	–	3C
30	MIN active-to-precharge time, t_{RAS}	–	2D
31	Module rank density	2GB	02
32	Address and command setup time, t_{IS_b}	-667 -53E	20 25
33	Address and command hold time, t_{IH_b}	-667 -53E	27 37
34	Data/data mask input setup time, t_{DS_b}	–	10
35	Data/data mask input hold time, t_{DH_b}	-667 -53E	17 22


Table 14: Serial Presence-Detect Matrix (continued)

Byte	Description	Entry (Version)	8GB
36	Write recovery time, t_{WR}	–	3C
37	WRITE-to-READ command delay, t_{WTR}	–	1E
38	READ-to-PRECHARGE command delay, t_{RTP}	–	1E
39	Memory analysis probe	–	00
40	Extension for bytes 41 and 42	–	06
41	MIN active-to-active/refresh time, t_{RC}^1	–	3C
42	MIN AUTO REFRESH-to-ACTIVE/AUTO REFRESH command period, t_{RFC}	–	7F
43	SDRAM device MAX cycle time, $t_{CK} (MAX)$	–	80
44	SDRAM device MAX DQS–DQ skew time, t_{DQSQ}	–667 –53E	18 1E
45	SDRAM device MAX read data hold skew factor, t_{QHS}	–667 –53E	22 28
46	PLL relock time	–	0F
47–61	Optional features, not supported	–	00
62	SPD revision	Release 1.2	12
63	Checksum for bytes 0–62	–667 –53E	C5 70
64	Manufacturer's JEDEC ID code	MICRON	2C
65–71	Manufacturer's JEDEC ID code	(continued)	00
72	Manufacturing location	1–12	01–0C
73–90	Module part number (ASCII)	–	Variable data
91	PCB identification code	1–9	01–09
92	Identification code (continued)	0	00
93	Year of manufacture in BCD	–	Variable data
94	Week of manufacture in BCD	–	Variable data
95–98	Module serial number	–	Variable data
99–127	Reserved for manufacturer-specific data	–	00
128–255	Reserved for customer-specific data	–	FF

Notes: 1. The t_{RC} SPD values shown are JEDEC DDR2 device specification values. The actual Micron DDR2 device specification is $t_{RC} = 55ns$ for all speed grades.

Module Dimensions

Figure 3: 240-Pin DDR2 VLP RDIMM

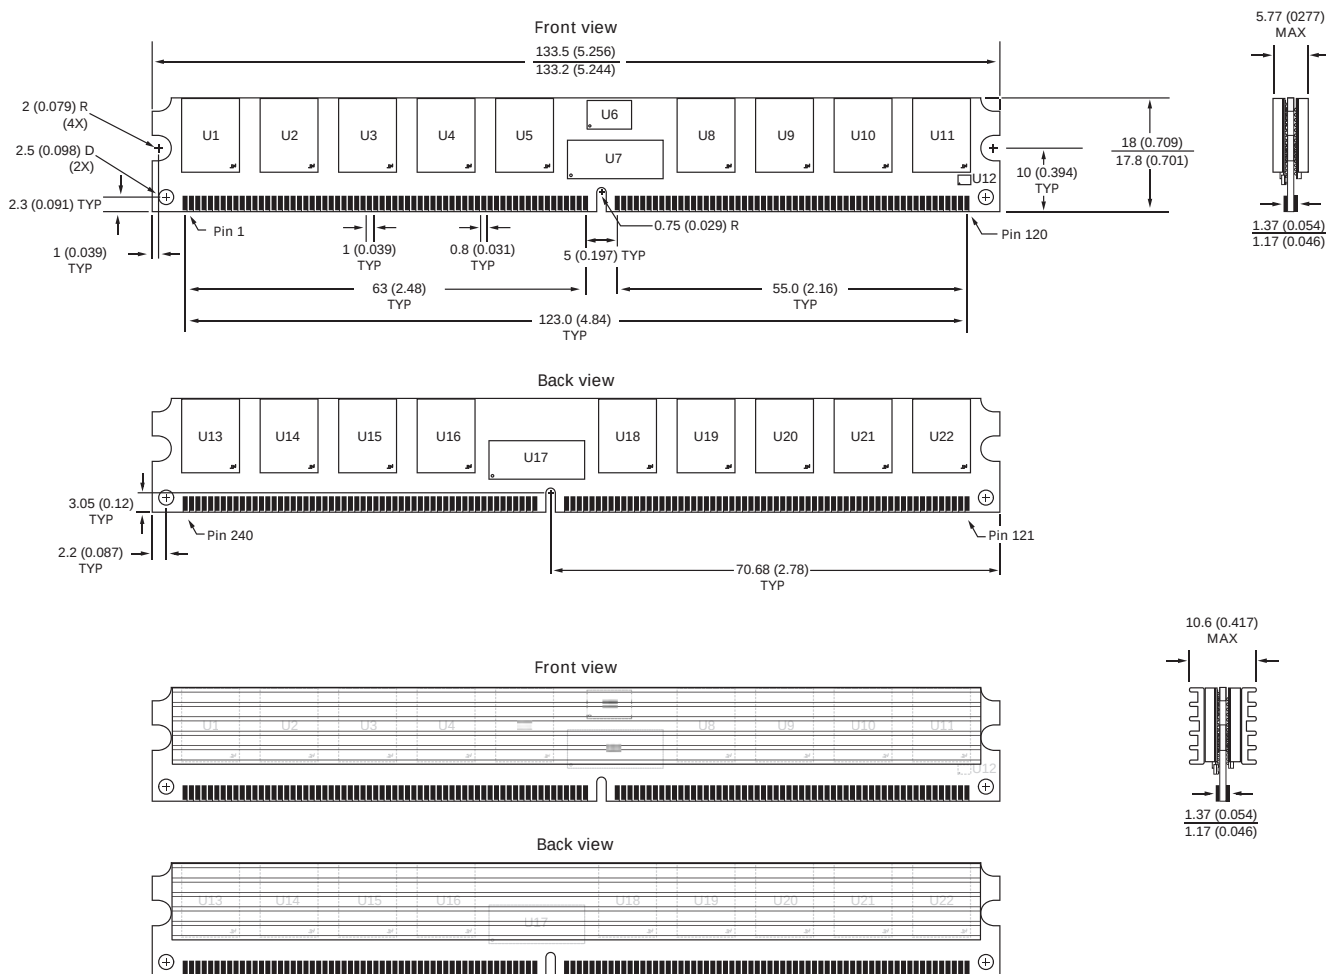

- Notes:
1. All dimensions are in millimeters (inches); MAX/MIN or typical (TYP) where noted.
 2. The dimensional diagram is for reference only. Refer to the JEDEC MO document for complete design dimensions.



8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-3900

prodmktg@micron.com www.micron.com Customer Comment Line: 800-932-4992

Micron, the M logo, and the Micron logo are trademarks of Micron Technology, Inc. All other trademarks are the property of their respective owners.

This data sheet contains minimum and maximum limits specified over the power supply and temperature range set forth herein. Although considered final, these specifications are subject to change, as further product development and data characterization sometimes occur.