

Silicon NPN Power Transistors

2SD1026

DESCRIPTION

- With TO-247 package
- High DC current gain
- DARLINGTON

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter




Fig.1 simplified outline (TO-247) and symbol

Absolute maximum ratings (Ta=25℃)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	100	V
V_{CEO}	Collector-emitter voltage	Open base	100	V
V_{EBO}	Emitter-base voltage	Open collector	7	V
I_C	Collector current-Continuous		15	A
I_{CM}	Collector current-Peak		22	A
I_B	Base current		1	A
I_{BM}	Base current-Peak		2	A
P_T	Total power dissipation	$T_C=25^\circ\text{C}$	100	W
T_j	Junction temperature		150	℃
T_{stg}	Storage temperature		-55~150	℃

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-c}$	Thermal resistance junction to case	1.25	℃/W

Silicon NPN Power Transistors

2SD1026

CHARACTERISTICS

Tj=25°C unless otherwise specified

www.datasheet4u.com

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V_{CEsat}	Collector-emitter saturation voltage	$I_C=10A$; $I_B=20mA$			1.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=10A$; $I_B=20mA$			2.0	V
I_{CEO}	Collector cut-off current	$V_{CE}=100V$; $I_B=0$			0.1	mA
I_{CBO}	Collector cut-off current	$V_{CB}=100V$; $I_E=0$			0.1	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=7V$; $I_C=0$			5	mA
h_{FE}	DC current gain	$I_C=10A$; $V_{CE}=3V$	1500		30000	
f_T	Transition frequency	$I_C=1.5A$; $V_{CE}=10V$		20		MHz
t_{on}	Turn-on time	$I_C=15A$; $I_{B1}=I_{B2}=20mA$ $R_L=2\Omega$; $V_{BB2}=4V$			2	μs
t_s	Storage time				5	μs
t_f	Fall time				3	μs

Silicon NPN Power Transistors

2SD1026

PACKAGE OUTLINE

www.datasheet4u.com

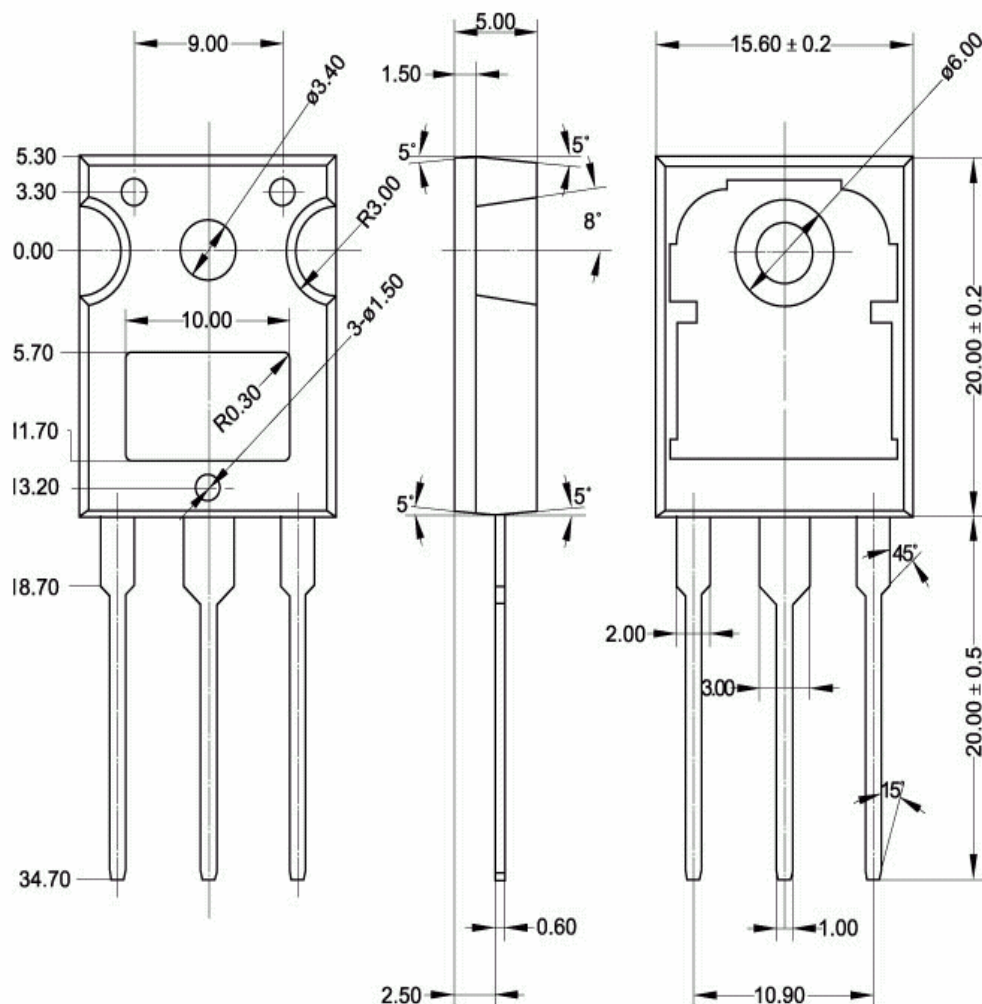


Fig.2 Outline dimensions