

2SD1052

SILICON NPN TRIPLE DIFFUSED TYPE (PCT PROCESS)

AUDIO FREQUENCY POWER AMPLIFIER APPLICATIONS.


FEATURES :

- High DC Current Gain of 250 to 750 at $V_{CE}=5V, I_C=0.5A$
- Low $V_{CE(sat)}$ of 1.0V (MAX.) at $I_C=1A, I_B=0.02A$
- Collector Power Dissipation of 30W at $T_c=25^\circ C$

MAXIMUM RATINGS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT	
Collector-Base Voltage	V_{CB0}	50	V	
Collector-Emitter Voltage	V_{CE0}	50	V	
Emitter-Base Voltage	V_{EB0}	7	V	
Collector Current	I_C	3	A	
Base Current	I_B	0.5	A	
Collector Power Dissipation	P_C	$T_a=25^\circ C$	1.5	W
		$T_c=25^\circ C$	30	
Junction Temperature	T_j	150	$^\circ C$	
Storage Temperature Range	T_{stg}	-55~150	$^\circ C$	

Unit in mm

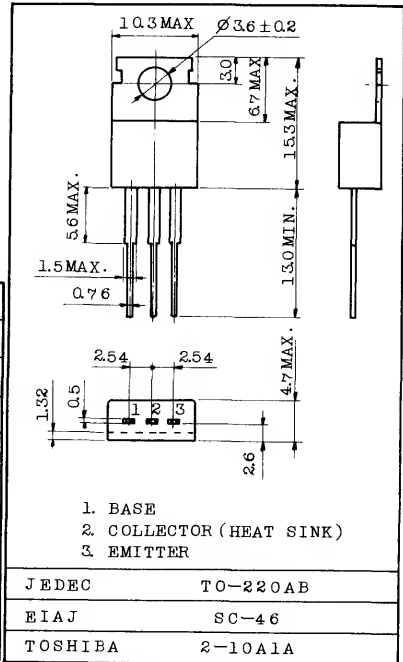

Mounting kit No.AC75
Weight : 1.9g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CB0}	$V_{CB}=50V, I_E=0$	-	-	100	μA
Emitter Cut-off Current	I_{EB0}	$V_{EB}=7V, I_C=0$	-	-	100	μA
Collector-Emitter Breakdown Voltage	$V(BR)_{CEO}$	$I_C=50mA, I_B=0$	50	-	-	V
DC Current Gain	h_{FE}	$V_{CE}=5V, I_C=0.5A$	250	-	750	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=1.0A, I_B=0.02A$	-	0.25	1.0	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=5V, I_C=0.5A$	-	0.7	1.0	V
Transition Frequency	f_T	$V_{CE}=5V, I_C=0.5A$	-	5.0	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	70	-	pF
Switching Time	Turn-on Time	T_{on}	-	1.5	-	μs
	Storage Time	T_{stg}	-	4.5	-	
	Fall Time	T_f	-	3.0	-	

