

Model No.: N133IB - L01 **Tentative** 

# **TFT LCD Tentative Specification**

**MODEL NO.: N133IB - L01** 

Customer:	
Approved by:	
Note:	

記錄	工作	審核	角色	投票
2008-04-02 17:18:32 CST	PMMD Director	cs_lee(李志聖 /56510/44926)	Director	Accept





Tentative

# - CONTENTS -

REVISION HISTORY	 2
1. GENERAL DESCRIPTION 1.1 OVERVIEW 1.2 FEATURES 1.3 APPLICATION 1.4 GENERAL SPECIFICATIONS 1.5 MECHANICAL SPECIFICATIONS	 3
2. ABSOLUTE MAXIMUM RATINGS 2.1 ABSOLUTE RATINGS OF ENVIRONMENT 2.2 ELECTRICAL ABSOLUTE RATINGS 2.2.1 TFT LCD MODULE 2.2.2 BACKLIGHT UNIT	4
3. ELECTRICAL CHARACTERISTICS 3.1 TFT LCD MODULE 3.2 BACKLIGHT UNIT	6
4. BLOCK DIAGRAM 4.1 TFT LCD MODULE 4.2 BACKLIGHT UNIT	10
5. INPUT TERMINAL PIN ASSIGNMENT 5.1 TFT LCD MODULE 5.2 BACKLIGHT UNIT 5.3 TIMING DIAGRAM OF LVDS INPUT SIGNAL 5.4 COLOR DATA INPUT ASSIGNMENT 5.5 EDID DATA STRUCTURE	11
6. INTERFACE TIMING 6.1 INPUT SIGNAL TIMING SPECIFICATIONS 6.2 POWER ON/OFF SEQUENCE	 17
7. OPTICAL CHARACTERISTICS 7.1 TEST CONDITIONS 7.2 OPTICAL SPECIFICATIONS	 19
8. PRECAUTIONS 8.1 HANDLING PRECAUTIONS 8.2 STORAGE PRECAUTIONS 8.3 OPERATION PRECAUTIONS	 23
9. PACKING 9.1 CARTON 9.2 PALLET	 24
10. DEFINITION OF LABELS 10.1 CMO MODULE LABEL 10.2 CMO CARTON LABE 10.3 CUSTOMER CARTON LABEL 10.4 CUSTOMER PALLET LABEL	 26



**Tentative** 

**②** 

# **REVISION HISTORY**

Version Date Rage (New) Section	n Description
Version Date (New) Section (New) Mar. 27, 2008 All All	Tentative specification was first issued.



Model No.: N133IB - L01

**Tentative** 

## 1. GENERAL DESCRIPTION

Global LCD Panel Exchange Center

#### 1.1 OVERVIEW

N133IB - L01 is a 13.3" TFT Liquid Crystal Display module with LED Backlight unit and 20 pins LVDS interface. This module supports 1280 x 800 Wide-XGA mode and can display 262,144 colors. The optimum viewing angle is at 6 o'clock direction. The converter module for Backlight is not built in.

## 1.2 FEATURES

- WXGA (1280 x 800 pixels) resolution
- 3.3V LVDS (Low Voltage Differential Signaling) interface with 1 pixel/clock
- Meet RoHS requirement
- LED Backlight

#### 1.3 APPLICATION

- TFT LCD Notebook

#### 1.4 GENERAL SPECIFICATIONS


Item	Specification	Unit	Note
Active Area	286.08 (H) x 178.8 (V)	mm	(1)
Bezel Opening Area	289.1 (H) x 181.8 (V)	mm	(1)
Driver Element	a-si TFT active matrix	-	-
Pixel Number	1280 x R.G.B. x 800	pixel	-
Pixel Pitch	0.2235 (H) x 0.2235 (V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	262,144	color	-
Transmissive Mode	Normally white	-	-
Surface Treatment	Glare , AR<1%, 2H	-	-

### 1.5 MECHANICAL SPECIFICATIONS

ŀ	tem	Min.	Тур.	Max.	Unit	Note		
	Horizontal(H)	298.5	299	299.5	mm			
Module Size	Vertical(V)	194.5	195	195.5	mm	(1)		
+	Depth(D)			5.5	mm			
W	eight eight		350	365	g	-		
I/F connector mounting position		The mounting i	(2)					
	center within ±0.5mm as the horizontal.							

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

Note (2) Connector mounting position





Model No.: N133IB - L01

Tentative

## 2. ABSOLUTE MAXIMUM RATINGS


#### 2.1 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Va	lue	Unit	Note	
item	Symbol	Min.	Max.	Offic	Note	
Storage Temperature	T <sub>ST</sub>	-20	+60	۰C	(1)	
Operating Ambient Temperature	T <sub>OP</sub>	0	+50	۰C	(1), (2)	
Shock (Non-Operating)	S <sub>NOP</sub>	-	200/2	G/ms	(3), (5)	
Vibration (Non-Operating)	$V_{NOP}$	-	1.5	G	(4), (5)	

Note (1) Temperature and relative humidity range is shown in the figure below.


- (a) 90 %RH Max. (Ta 40 °C).
- (b) Wet-bulb temperature should be 39 °C Max. (Ta > 40 °C).
- (c) No condensation.

# **Relative Humidity (%RH)**

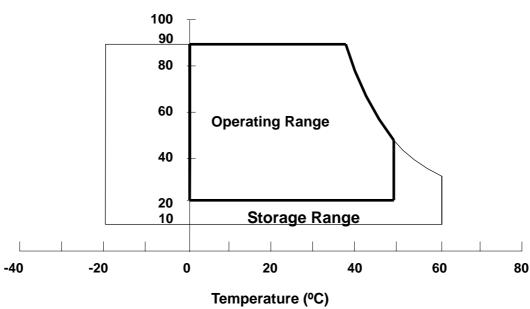

- Note (2) The temperature of panel surface should be 0 °C Min. and 60 °C Max.
- Note (3) 1 time for  $\pm X$ ,  $\pm Y$ ,  $\pm Z$ . for Condition (200G / 2ms) is half Sine Wave,
- Note (4) 10 ~ 200 Hz, 0.5 Hr / Cycle, 1 cycles for each X, Y, Z axis.
- Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

The fixing condition is shown as below:





Global LCD Panel Exchange Center

Issued Date: Mar. 27, 2008 Model No.: N133IB - L01

**Tentative** 

# 2.2 ELECTRICAL ABSOLUTE RATINGS

#### 2.2.1 TFT LCD MODULE

Item	Symbol	Value		Unit	Note
item	Symbol	Min.	Max.	Offic	Note
Power Supply Voltage	V <sub>cc</sub>	-0.3	+4.0	V	(1)
Logic Input Voltage	$V_{IN}$	-0.3	V <sub>CC</sub> +0.3	V	(1)

## 2.2.2 BACKLIGHT UNIT

Item	Symbol	V	'alue	Unit	Note
item	Symbol	Min.	Max.	Offic	Note
LED Light Bar Power Supply Voltage	$V_L$	0	TBD	V	(1), (2)
LED Light Bar Power Supply Current	IL	0	TBD	mA	(1), (2)

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

Note (2) Specified values are for LED (Refer to 3.2 for further information).



Model No .: N133IB - L01

Tentative

# 3. ELECTRICAL CHARACTERISTICS

#### 3.1 TFT LCD MODULE


Parameter		Cumbal		Value	Linit	Note	
		Symbol	Min.	Тур.	Max.	Unit	Note
Power Supply Voltage		Vcc	3.0	3.3	3.6	V	-
Ripple Voltage		$V_{RP}$	-		100	mV	-
Rush Current		I <sub>RUSH</sub>	•	1.2	1.5	Α	(2)
Initial Stage Current		I <sub>IS</sub>			1.0	Α	(2)
Power Supply Current White	te	lcc	-	(220)	(270)	mA	(3)a
Blac	k		ı	(270)	(310)	mA	(3)b
LVDS Differential Input High T	hreshold	V <sub>TH(LVDS)</sub>			+100	mV	(5), V <sub>CM</sub> =1.2V
LVDS Differential Input Low Threshold		V <sub>TL(LVDS)</sub>	-100			mV	(5) V <sub>CM</sub> =1.2V
LVDS Common Mode Voltage		$V_{CM}$	1.125	4	1.375	V	(5)
LVDS Differential Input Voltage		$ V_{ID} $	100		600	mV	(5)
Terminating Resistor		$R_T$	•	100	-	Ohm	=
Power per FBL WG		Pro	_	(TBD)		W	(4)

Note (1) The ambient temperature is  $Ta = 25 \pm 2$  °C.

Note (2)  $I_{\text{RUSH}}$ : the maximum current when VCC is rising

I<sub>IS</sub>: the maximum current of the first 100ms after power-on


Measurement Conditions: Shown as the following figure. Test pattern: black.

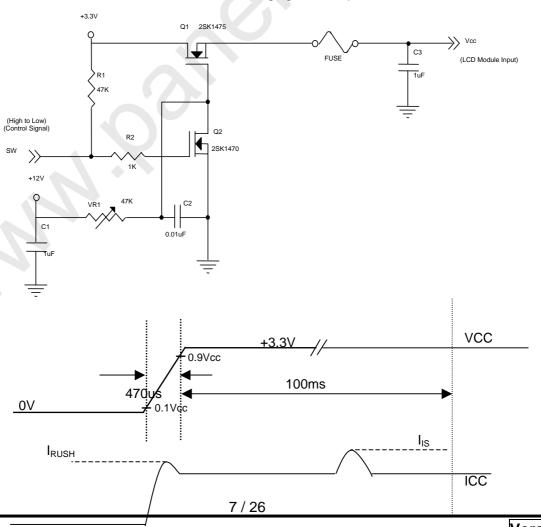

Model No.: N133IB - L01



Note (3)The specified power supply current is under the conditions at Vcc = 3.3 V,  $Ta = 25 \pm 2 \,^{\circ}\text{C}$ ,  $f_v = 60 \,^{\circ}$ Hz, whereas a power dissipation check pattern below is displayed.








Active Area

- Note (4) The specified power are the sum of LCD panel electronics input power and the inverter input power. Test conditions are as follows.
  - (a) Vcc = 3.3 V,  $Ta = 25 \pm 2 \, ^{\circ}\text{C}$ ,  $f_v = 60 \, \text{Hz}$ ,
  - (b) The pattern used is a black and white 32 x 36 checkerboard, slide #100 from the VESA file "Flat Panel Display Monitor Setup Patterns", FPDMSU.ppt.
  - (c) Luminance: 60 nits.
  - (d) The converter used is provided from Sumida(CMO converter P/N:27-D016392).

Note (5) The parameters of LVDS signals are defined as the following figures.

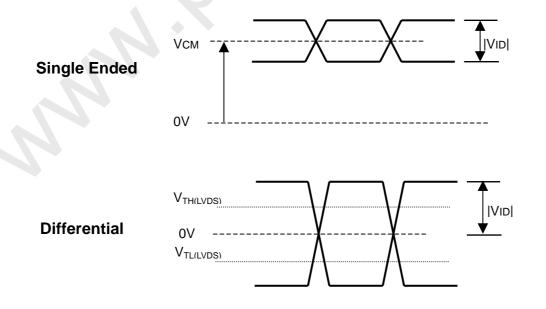






**Tentative** 

# 3.2 BACKLIGHT UNIT

 $Ta = 25 \pm 2 \, {}^{\circ}C$ 

Parameter	Symbol Value			Unit	Note	
i arameter	Symbol	Min.	Тур.	Max.	Offic	Note
LED Quantity			42		Pcs	(1),
LED light bar Power Supply Voltage	$V_{L}$	21	22.4	23.8	V <sub>dc</sub>	
LED light bar Power	ı	111	120	150	m /\	(1), (2)
Supply Current	ΙL	114	120	150	mA	
LED Life Time	$L_BL$	12,000			Hrs	(4)
Power Consumption	Po	2.52	2.70	2.86	W	(3), $I_L = 120.0 \text{ mA}$

Note (1) LED light bar configuration is shown as below:



Note (2) For better LED light bar driving quality, it is recommended to utilize the adaptive boost converter with current balancing function to drive LED light-bar.

Note (3)  $P_O = I_L \times V_L$ 

Note (3) The lifetime of LED is defined as the time when it continues to operate under the conditions at  $Ta = 25 \pm 2$  °C and I = 20mA(Per EA) until the brightness becomes 50% of its original value.

Note (4) The lifetime of LED is defined as the time when it continues to operate under the conditions at Ta =  $25 \pm 2$  °C and  $I_L = 20$  mA(Per EA) until the brightness becomes 50% of its original value.






**Tentative** 

## 4. BLOCK DIAGRAM

#### 4.1 TFT LCD MODULE

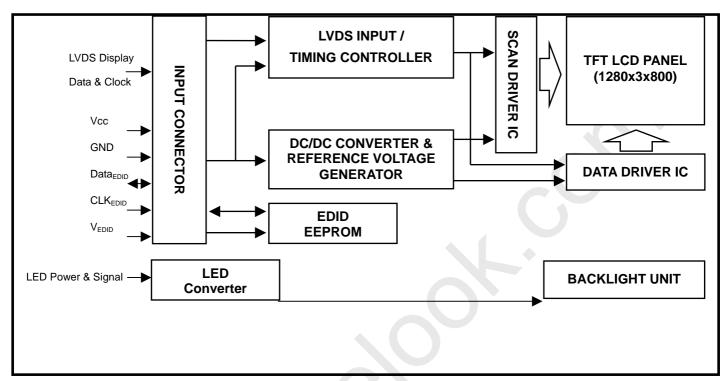



Global LCD Panel Exchange Center

Issued Date: Mar. 27, 2008 Model No.: N133IB - L01

Tentative

#### 5. INPUT TERMINAL PIN ASSIGNMENT


#### 5.1 TFT LCD MODULE


Pin	Symbol	Description	Polarity	Remark
1	VSS	Ground		-
2	VDD	Power Supply +3.3 V		-
3	VDD	Power Supply +3.3 V		-
4	$V_{EDID}$	DDC +3.3 V		
5	TEST	Panel Self Test		
6	CLK <sub>EDID</sub>	DDC Clock		
7	Data <sub>EDID</sub>	DDC Data		
8	Rxin0-	LVDS Differential Data Input	Negative	R0~R5,G0-
9	Rxin0+	LVDS Differential Data Input	Positive	
10	VSS	Ground		
11	Rxin1-	LVDS Differential Data Input	Negative	
12	Rxin1+	LVDS Differential Data Input	Positive	G1~G5,B0,B1
13	VSS	Ground		
14	Rxin2-	LVDS Differential Data Input	Negative	-
15	Rxin2+	LVDS Differential Data Input	Positive	B2~B5,Hsync,Vsync,DE
16	VSS	Ground		
17	CLK-	LVDS Clock Data Input	Negative	LVDS Level
18	CLK+	LVDS Clock Data Input	Positive	
19	VSS	Ground	-	-
20	VSS	Ground	-	-

Note (1) Connector Part No.: DF19KR-20P-1H or equivalent


Note (2) User's connector Part No: DF19G-20S-1C or equivalent

Note (3) The first pixel is odd as shown in the following figure.



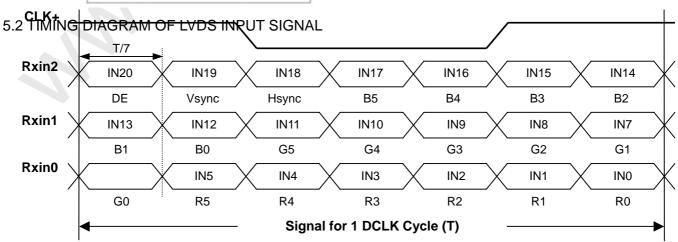

Global LCD Panel Exchange Center






# 5.3 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color. The higher the binary input the brighter the color. The table below provides the assignment of color versus data input.

										Data		al		1					
	Color		Red				Green				Blue								
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Basic	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Colors	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray	Red(2)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
Scale	:	:	:	:	:	:	:	:	:	: \	:	):	:	:	:	:	:	:	:
Of	:	:	:	:	:	:	:	:				:	:	:	:	:	:	:	:
Red	Red(61)	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
Gray	Green(2)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
Scale	:	:	:	:	: <	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Of	:	:	:	:			: `	:	:	:	:	:	:	:	:	:	:	:	:
Green	Green(61)	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	Green(62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Gray Scale Of	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Blue	Blue(61)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

Note (1) 0: Low Level Voltage, 1: High Level Voltage





Tentative

### 5.5 EDID DATA STRUCTURE

The EDID (Extended Display Identification Data) data formats are to support displays as defined in the

VESA	Plug & D	Display and FPDI standards.		
Byte # (decimal)	Byte # (hex)	Field Name and Comments	Value (hex)	Value (binary)
0	0	Header	00	00000000
1	1	Header	FF	11111111
2	2	Header	FF	11111111
3	3	Header	FF	11111111
4	4	Header	FF	11111111
5	5	Header	FF	11111111
6	6	Header	FF	11111111
7	7	Header	00	00000000
8	8	EISA ID manufacturer name ("CMO")	0D	00001101
9	9	EISA ID manufacturer name (Compressed ASCII)	AF	10101111
10	0A	ID product code (N133IB-L01)	14	00010100
11	0B	ID product code (hex LSB first; N133IB-L01)	13	00010011
12	0C	ID S/N (fixed "0")	00	00000000
13	0D	ID S/N (fixed "0")	00	00000000
14	0E	ID S/N (fixed "0")	00	00000000
15	0F	ID S/N (fixed "0")	00	00000000
16	10	Week of manufacture (fixed week code)	00	00000000
17	11	Year of manufacture (fixed year code)	00	00000000
18	12	EDID structure version # ("1")	01	00000001
19	13	EDID revision # ("3")	03	00000011
20	14	Video I/P definition ("digital")	80	10000000
21	15	Active area horizontal 28.608cm	1D	00011101
22	16	Active area vertical 17.88cm	12	00010010
23	17	Display Gamma (Gamma = "2.2")	78	01111000
24	18	Feature support ("Active off, RGB Color")	0A	00001010
25	19	Red/Green (Rx1, Rx0, Ry1, Ry0, Gx1, Gx0, Gy1, Gy0)	08	00001000
26	1A	Blue/White (Bx1, Bx0, By1, By0, Wx1, Wx0, Wy1, Wy0)	A5	10100101
27	1B	Red-x (Rx = "0.602")	9A	10011010
28	1C	Red-y (Ry = "0.340")	57	01010111
29	1D	Green-x (Gx = "0.330")	54	01010100
30	1E	Green-y (Gy = "0.543")	8B	10001011
31	1F	Blue-x (Bx = "0.158")	28	00101000
32	20	Blue-y (By = "0.146")	25	00100101
33	21	White-x (Wx = "0.313")	50	01010000
34	22	White-y (Wy = "0.329")	54	01010100
35	23	Established timings 1	00	00000000
36	24	Established timings 2	00	00000000
37	25	Manufacturer's reserved timings	00	00000000
38	26	Standard timing ID # 1	01	00000001
39	27	Standard timing ID # 1	01	00000001



**Tentative** 

**②** 

				<del> </del>
40	28	Standard timing ID # 2	01	00000001
41	29	Standard timing ID # 2	01	00000001
42	2A	Standard timing ID # 3	01	00000001
43	2B	Standard timing ID # 3	01	00000001
44	2C	Standard timing ID # 4	01	00000001
45	2D	Standard timing ID # 4	01	00000001
46	2E	Standard timing ID # 5	01	00000001
47	2F	Standard timing ID # 5	01	00000001
48	30	Standard timing ID # 6	01	00000001
49	31	Standard timing ID # 6	01	00000001
50	32	Standard timing ID # 7	01	00000001
51	33	Standard timing ID # 7	01	00000001
52	34	Standard timing ID # 8	01	0000001
53	35	Standard timing ID # 8	01	00000001
54	36	Detailed timing description # 1 Pixel clock ("71MHz", According to VESA CVT Rev1.1)	ВС	10111100
55	37	# 1 Pixel clock (hex LSB first)	1B	00011011
56	38	# 1 H active ("1280")	00	00000000
57	39	# 1 H blank ("160")	A0	10100000
58	3A	# 1 H active : H blank ("1280 : 160")	50	01010000
59	3B	# 1 V active ("800")	20	00100000
60	3C	# 1 V blank ("23")	17	00010111
61	3D	# 1 V active : V blank ("800 :23")	30	00110000
62	3E	# 1 H sync offset ("48")	30	00110000
63	3F	# 1 H sync pulse width ("32")	20	00100000
64	40	# 1 V sync offset : V sync pulse width ("3 : 6")	36	00110110
65	41	# 1 H sync offset : H sync pulse width : V sync offset : V sync width ("48: 32 : 3 : 6")	00	00000000
66	42	# 1 H image size ("286 mm")	1E	00011110
67	43	# 1 V image size ("179 mm")	B3	10110011
68	44	# 1 H image size : V image size ("286 : 179")	10	00010000
69	45	# 1 H boarder ("0")	00	00000000
70	46	# 1 V boarder ("0")	00	00000000
71	47	# 1 Non-interlaced, Normal, no stereo, Separate sync, H/V pol Negatives	18	00011000
72	48	Detailed timing description # 2	00	00000000
73	49	# 2 Flag	00	00000000
74	4A	# 2 Reserved	00	00000000
75	4B	# 2 FE (hex) defines ASCII string (Model Name "N133I7-L01", ASCII)	FE	11111110
76	4C	# 2 Flag	00	00000000
77	4D	# 2 1st character of name ("N")	4E	01001110
78	4E	# 2 2nd character of name ("1")	31	00110001
70 79	4F	# 2 3rd character of name ("3")	33	00110001
80	50	# 2 4th character of name ("3")	33	00110011
81	51	# 2 5th character of name ("I")	49	010010011
82	52	# 2 6th character of name ("B")	49	01001001
83	53	# 2 7th character of name ("-")	2D	00101101
		` '		
84 85	54	# 2 8th character of name ("L")	4C	01001100
იე	55	# 2 9th character of name ("0")	30	00110000



**Tentative** 

**②** 

86	56	# 2 9th character of name ("1")	31	00110001
87	57	# 2 New line character indicates end of ASCII string	0A	00001010
88	58	# 2 Padding with "Blank" character	20	00100000
89	59	# 2 Padding with "Blank" character	20	00100000
90	5A	Detailed timing description # 3	00	00000000
91	5B	# 3 Flag	00	00000000
92	5C	# 3 Reserved	00	00000000
93	5D	# 3 FE (hex) defines ASCII string (Vendor "CMO", ASCII)	FE	11111110
94	5E	# 3 Flag	00	00000000
95	5F	# 3 1st character of string ("C")	43	01000011
96	60	# 3 2nd character of string ("M")	4D	01001101
97	61	# 3 3rd character of string ("O")	4F	01001111
98	62	# 3 New line character indicates end of ASCII string	0A	00001010
99	63	# 3 Padding with "Blank" character	20	00100000
100	64	# 3 Padding with "Blank" character	20	00100000
101	65	# 3 Padding with "Blank" character	20	00100000
102	66	# 3 Padding with "Blank" character	20	00100000
103	67	# 3 Padding with "Blank" character	20	00100000
104	68	# 3 Padding with "Blank" character	20	00100000
105	69	# 3 Padding with "Blank" character	20	00100000
106	6A	# 3 Padding with "Blank" character	20	00100000
107	6B	# 3 Padding with "Blank" character	20	00100000
108	6C	Detailed timing description # 4	00	00000000
109	6D	# 4 Flag	00	00000000
110	6E	# 4 Reserved	00	00000000
111	6F	# 4 FE (hex) defines ASCII string (Model Name"N133I7-L01", ASCII)	FE	11111110
112	70	# 4 Flag	00	00000000
113	71	# 4 1st character of name ("N")	4E	01001110
114	72	# 4 2nd character of name ("1")	31	00110001
115	73	# 4 3rd character of name ("3")	33	00110011
116	74	# 4 4th character of name ("3")	33	00110011
117	75	# 4 5th character of name ("I")	49	01001001
118	76	# 4 6th character of name ("B")	42	01000010
119	77	# 4 7th character of name ("-")	2D	00101101
120	78	# 4 8th character of name ("L")	4C	01001100
121	79	# 4 9th character of name ("0")	30	00110000
122	7A	# 4 9th character of name ("1")	31	00110001
123	7B	# 4 New line character indicates end of ASCII string	0A	00001010
124	7C	# 4 Padding with "Blank" character	20	00100000
125	7D	# 4 Padding with "Blank" character	20	00100000
126	7E	Extension flag	00	00000000
127	7F	Checksum	98	10011000



**Tentative** 

# 6. INTERFACE TIMING

#### 6.1 INPUT SIGNAL TIMING SPECIFICATIONS


The input signal timing specifications are shown as the following table and timing diagram.

Signal	Item	Symbol	Min.	Тур.	Max.	Unit	Note
DCLK	Frequency	1/Tc	(40)	(71)	(80)	MHz	(2)(3)
	Vertical Total Time	TV	802	823	(1023)	TH	-
	Vertical Active Display Period	TVD	800	800	800	TH	-
DE	Vertical Active Blanking Period	TVB	TV-TVD	23	TV-TVD	TH	
DE	Horizontal Total Time	TH	1380	1440	(1600)	Tc	(2)
	Horizontal Active Display Period	THD	1280	1280	1280	Tc	(2)
	Horizontal Active Blanking Period	THB	TH-THD	160	TH-THD	Tc	(2)

Note (1) Because this module is operated by DE only mode, Hsync and Vsync are ignored

- (2) 2 channels LVDS input.
- (3) The module can be operated at 40Hz refresh rate. However, there might be some side effect like flicker, brightness change or etc.


# INPUT SIGNAL TIMING DIAGRAM

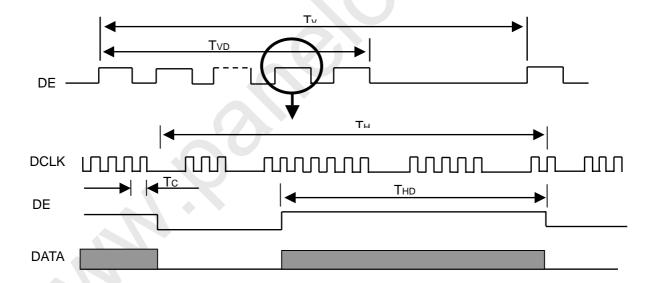



Model No.: N133IB - L01 Tentative

# 6.2 POWER ON/OFF SEQUENCE

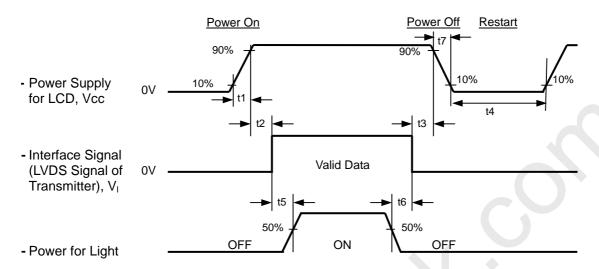

# Timing Specifications:

0.5< t1 10 msec 0 < t250 msec 0 < t350 msec t4 500 msec t5 200 msec t6 200 msec

- Note (1) Please avoid floating state of interface signal at invalid period.
- Note (2) When the interface signal is invalid, be sure to pull down the power supply of LCD Vcc to 0 V.
- Note (3) The Backlight inverter power must be turned on after the power supply for the logic and the interface signal is valid. The Backlight inverter power must be turned off before the power supply for the logic and the interface signal is invalid.
- Note (4) Sometimes some slight noise shows when LCD is turned off (even backlight is already off). To avoid this phenomenon, we suggest that the Vcc falling time is better to follow 5 t7 300 ms.



Tentative

## 7. OPTICAL CHARACTERISTICS

#### 7.1 TEST CONDITIONS

Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	°C
Ambient Humidity	На	50±10	%RH
Supply Voltage	$V_{CC}$	3.3	V
Input Signal	According to typical va	alue in "3. ELECTRICAL	CHARACTERISTICS"
LED Light Bar Input Current	Ι	120	mA

The measurement methods of optical characteristics are shown in Section 7.2. The following items should be measured under the test conditions described in Section 7.1 and stable environment shown in Note (6).

#### 7.2 OPTICAL SPECIFICATIONS

Item		Symbol	Condition	Min.	Тур.	Max.	Unit	Note	
Contrast Ratio		CR		300	400	1	1	(2), (5)	
Response Time		T <sub>R</sub>			3	8	ms	(3)	
Response fille		$T_F$		-	7	12	ms	(3)	
Luminance of V	Vhite (5P)	L <sub>AVE</sub>		190	220	-	cd/m <sup>2</sup>	(4), (5)	
White Variation		δW		-	-	1.40	-	(5), (6)	
	Red	Rx	0 -00 0 -00		(0.595)		-		
	Red	Ry	$\theta_x$ =0°, $\theta_Y$ =0° Viewing Normal Angle	Typ 0.05	(0.345)		ı		
	Green	Gx	Viewing Normal Angle		(0.320)		-		
Color		Gy			(0.555)	Тур.+	-	(1), (5)	
Chromaticity	Blue	Bx			(0.155)	0.05	-	(1), (3)	
		Ву			(0.145)		-		
	White	Wx			(0.313)		-		
		Wy			(0.329)		-		
Viewing Angle	Horizontal	$\theta_{x}$ +		40	45	-			
		$\theta_{x}$ -	CR≥10	40	45	-	Dog	(4) (E)	
	Vertical	$\theta_{Y}$ +		15	20		Deg.	(1), (5)	
		θ <sub>Y</sub> -		40	45	-			




Global LCD Panel Exchange Center

Issued Date: Mar. 27, 2008 Model No.: N133IB - L01

Tentative

Definition of Viewing Angle ( $\theta x$ ,  $\theta y$ ):

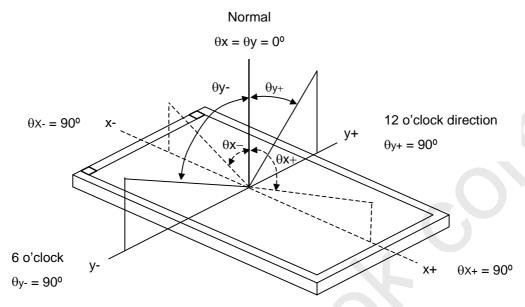

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

Contrast Ratio (CR) = L63 / L0


L63: Luminance of gray level 63

L 0: Luminance of gray level 0

CR = CR (5)

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time  $(T_R, T_F)$  and measurement method:

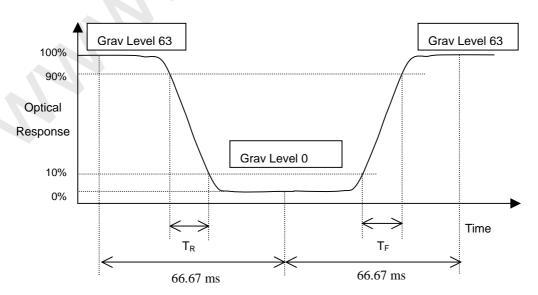



Tentative

Note (4) Definition of Average Luminance of White (L<sub>AVE</sub>):


Measure the luminance of gray level 63 at 5 points

$$L_{AVE} = [L (1) + L (2) + L (3) + L (4) + L (5)] / 5$$

L (x) is corresponding to the luminance of the point X at Figure in Note (6).

## Note (5) Measurement Setup:


The LCD module should be stabilized at given temperature for 15 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 15 minutes in a windless room.

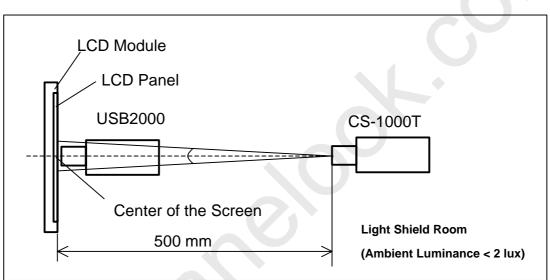

Note (6) Definition of White Variation ( $\delta W$ ):

Measure the luminance of gray level 63 at 5 points

 $\delta W = Maximum [L (1), L (2), L (3), L (4), L (5)] / Minimum [L (1), L (2), L (3), L (4), L (5)]$ 

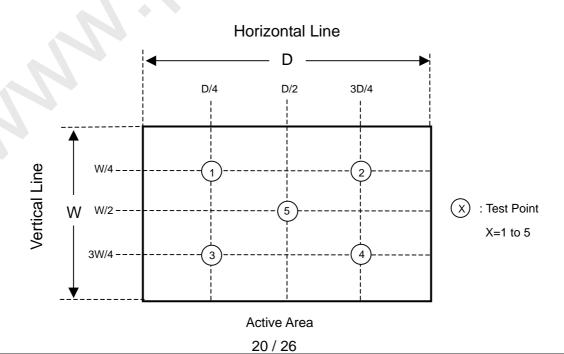



**Tentative** 

### 8. PRECAUTIONS

#### 8.1 HANDLING PRECAUTIONS

- (1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.
- (2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.
- (5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (9) Do not disassemble the module.
- (10) Do not pull or fold the lamp wire.
- (11) Pins of I/F connector should not be touched directly with bare hands.

#### 8.2 STORAGE PRECAUTIONS

- (1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (3) It may reduce the display quality if the ambient temperature is lower than 10 °C. For example, the response time will become slowly, and the starting voltage of lamp will be higher than the room temperature.

#### 8.3 OPERATION PRECAUTIONS

- (1) Do not pull the I/F connector in or out while the module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMOS LSI chips from damage during latch-up.
- (3) The startup voltage of Backlight is approximately 1000 Volts. It may cause electrical shock while



Tentative

assembling with converter. Do not disassemble the module or insert anything into the Backlight unit.

#### 9. PACKAGING

#### 9.1 CARTON

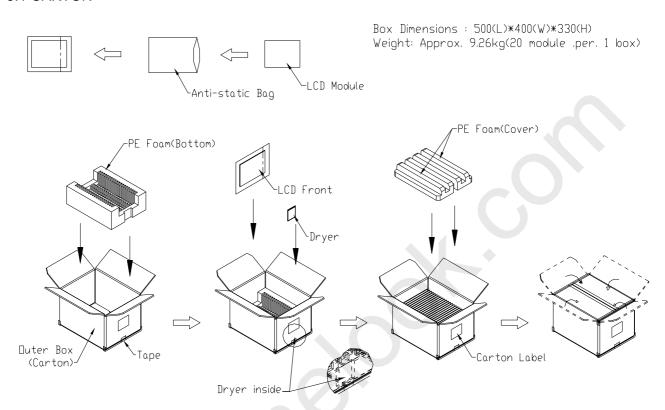


Figure. 9-1 Packing method



**Tentative** 

#### 9.2 PALLET

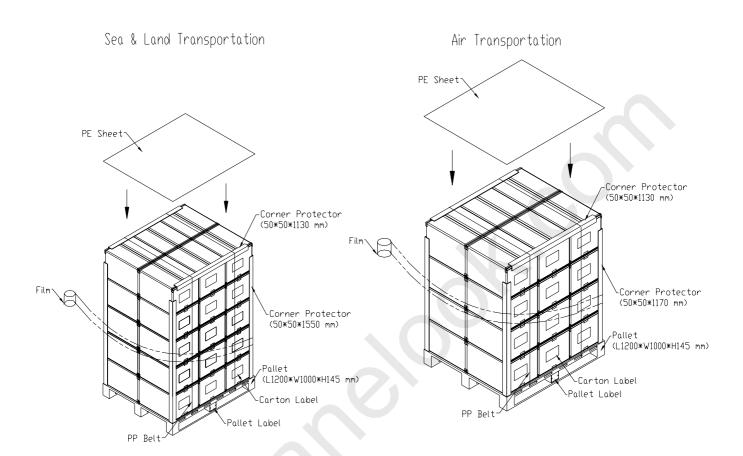


Figure. 9-2 Packing method




**Tentative** 


# 10. DEFINITION OF LABELS

#### 10.1 CMO MODULE LABEL

The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.

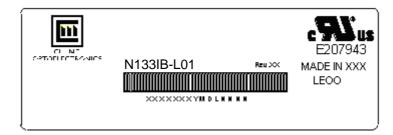

- (a) Model Name: N133IB L01
- (b) Revision: Rev. XX, for example: A1, ..., C1, C2 ...etc.

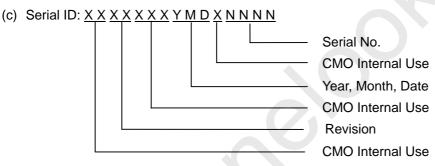

- (d) Production Location: MADE IN XXXX. XXXX stands for production location.
- (e)UL/CB logo: LEOO especially stands for panel manufactured by CMO NingBo satisfying UL/CB requirement. The panel without LEOO mark stands for manufactured by CMO Taiwan satisfying UL/CB requirement.

Serial ID includes the information as below:

(a) Manufactured Date: Year: 1~9, for 2001~2009

Month: 1~9, A~C, for Jan. ~ Dec.

Day: 1~9, A~Y, for 1st to 31st, exclude I, O and U

- (b) Revision Code: cover all the change
- (c) Serial No.: Manufacturing sequence of product



Model No .: N133IB - L01

**Tentative** 

## 10.2 CMO CARTON LABEL



(a) Production location: Made in XXXX. XXXX stands for production location.

