

NEC



NPN EPITAXIAL SILICON TRANSISTOR FOR MICROWAVE HIGH-GAIN AMPLIFICATION

NE698M01**FEATURES**

- **HIGH f_t :**
17 GHz TYP at 2 V, 7 mA
- **LOW NOISE FIGURE:**
NF = 1.1 dB TYP at $f = 2$ GHz, 2 V, 1 mA
- **HIGH GAIN:**
 $|S_{21E}|^2 = 15.5$ dB TYP at $f = 2$ GHz
- **6 PIN SMALL MINI MOLD PACKAGE**
- **EXCELLENT LOW VOLTAGE,
LOW CURRENT PERFORMANCE**

DESCRIPTION

The NE698M01 is an NPN high frequency silicon epitaxial transistor (NE686) encapsulated in an ultra small 6 pin SOT-363 package. Its four emitter pins decrease emitter inductance resulting in 3 dB more gain compared to conventional SOT-23 and SOT-143 devices. The NE698M01 is ideal for LNA and pre-driver applications up to 2.4 GHz where low cost, high gain, low voltage and low current are prime considerations.

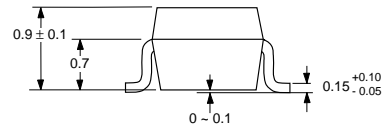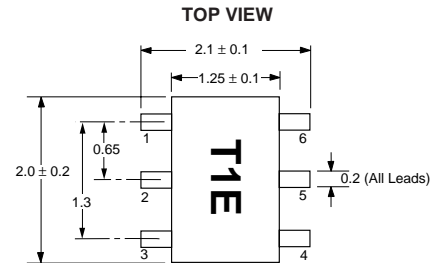OUTLINE DIMENSIONS (Units in mm)**PACKAGE OUTLINE M01****PIN CONNECTIONS**

- | | |
|------------|--------------|
| 1. Emitter | 4. Emitter |
| 2. Emitter | 5. Emitter |
| 3. Base | 6. Collector |

Note: Pin 3 is identified with a circle on the bottom of the package.

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

| PART NUMBER PACKAGE OUTLINE | | | NE698M01 M01 | | |
|--------------------------------|---|---------------|-----------------|------|------|
| SYMBOLS | PARAMETERS AND CONDITIONS | UNITS | MIN | TYP | MAX |
| I_{CBO} | Collector Cutoff Current at $V_{CB} = 5$ V, $I_E = 0$ | μA | | | 0.1 |
| I_{EBO} | Emitter Cutoff Current at $V_{EB} = 1$ V, $I_C = 0$ | μA | | | 0.1 |
| h_{FE}^1 | DC Current Gain at $V_{CE} = 2$ V, $I_C = 7$ mA | | 70 | | 140 |
| f_t | Gain Bandwidth Product at $V_{CE} = 2$ V, $I_C = 7$ mA, $f = 2.0$ GHz | GHz | | 17 | |
| C_{RE}^2 | Feedback Capacitance at $V_{CB} = 2$ V, $I_E = 0$, $f = 1$ MHz | pF | | 0.1 | 0.15 |
| $ S_{21E} ^2$ | Insertion Power Gain at $V_{CE} = 2$ V, $I_C = 7$ mA, $f = 2.0$ GHz | dB | 13 | 15.5 | |
| NF | Noise Figure at $V_{CE} = 2$ V, $I_C = 1$ mA, $f = 2.0$ GHz | dB | | 1.1 | 1.8 |

Notes:

1. Pulsed measurement, pulse width ≤ 350 μs , duty cycle ≤ 2 %.
2. The emitter terminal should be connected to the ground terminal of the 3 terminal capacitance bridge.

ABSOLUTE MAXIMUM RATINGS¹ ($T_A = 25^\circ\text{C}$)

| SYMBOLS | PARAMETERS | UNITS | RATINGS |
|------------------|------------------------------|-------|-------------|
| V _{CB0} | Collector to Base Voltage | V | 5 |
| V _{CE0} | Collector to Emitter Voltage | V | 3 |
| V _{EB0} | Emitter to Base Voltage | V | 2 |
| I _C | Collector Current | mA | 10 |
| P _T | Total Power Dissipation | mW | 30 |
| T _J | Junction Temperature | °C | 150 |
| T _{STG} | Storage Temperature | °C | -65 to +150 |





Notes:

1. Operation in excess of any one of these parameters may result in permanent damage.

ORDERING INFORMATION


| PART NUMBER | ORDER MULTIPLE | PACKAGING |
|-------------|----------------|-------------|
| NE698M01-T1 | 3000 | Tape & Reel |

TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)

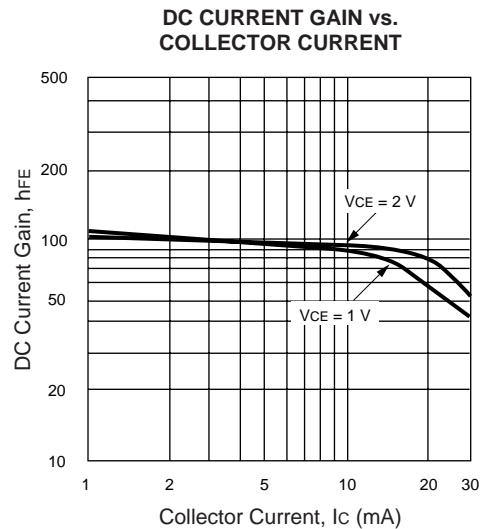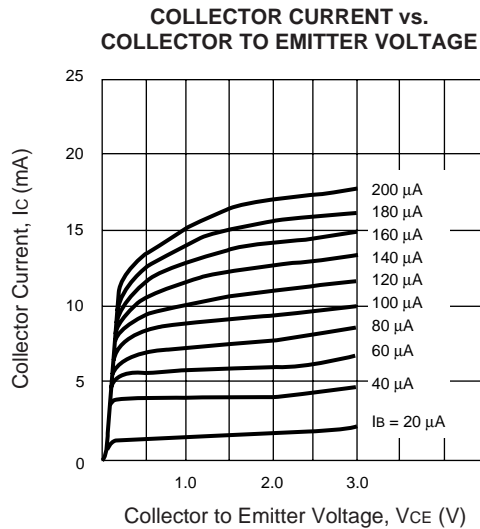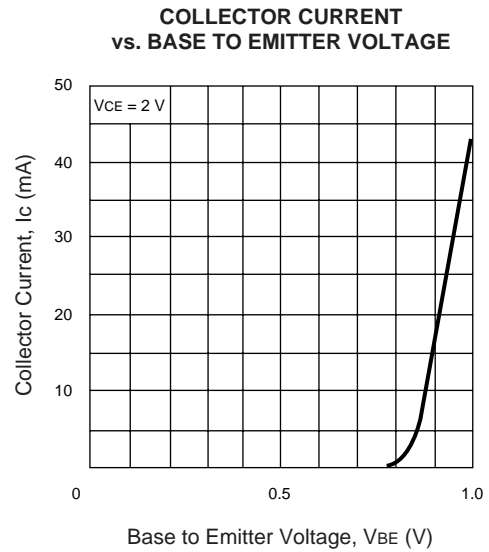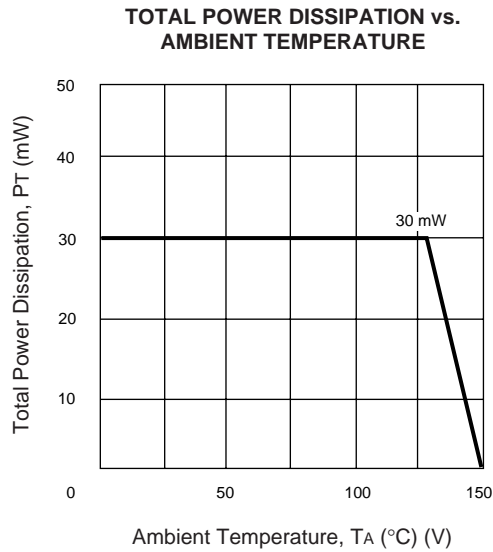


TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)


GAIN BANDWIDTH PRODUCT vs. I_c CHARACTERISTICS

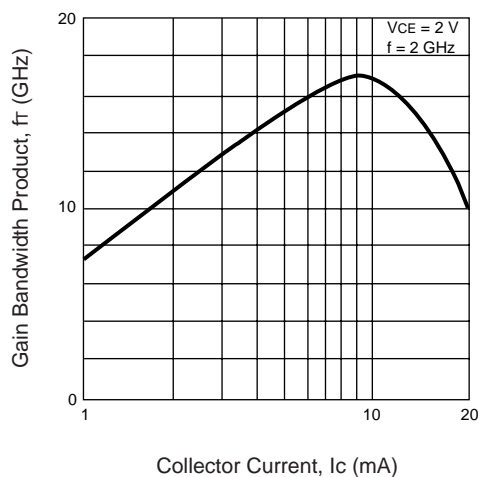


INSERTION POWER GAIN vs. I_c CHARACTERISTICS

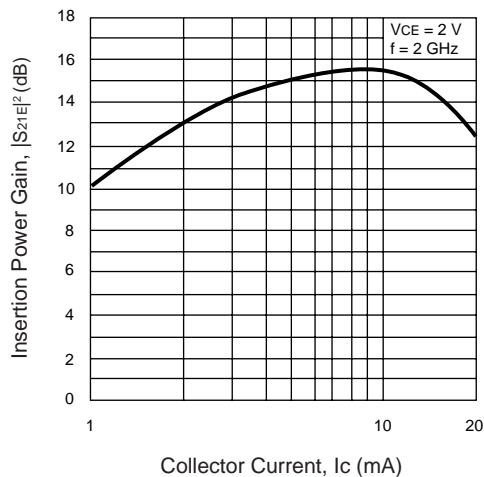


NOISE FIGURE vs. I_c CHARACTERISTICS

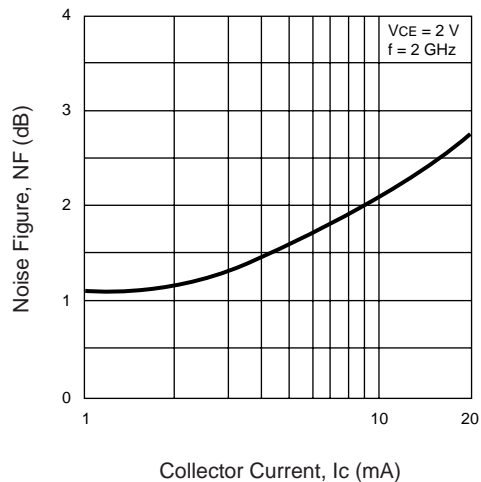

FEEDBACK CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

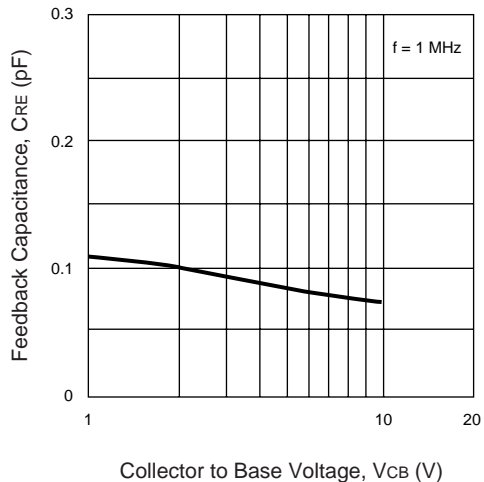


INSERTION POWER GAIN vs. FREQUENCY CHARACTERISTICS

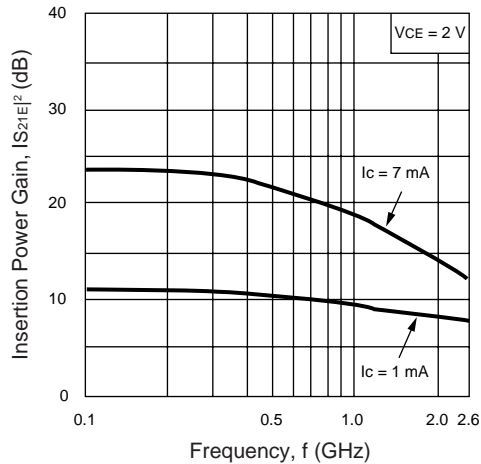


TYPICAL NOISE PARAMETERS ($T_A = 25^\circ\text{C}$)

| FREQ. (GHz) | NF _{OPT} (dB) | G _A (dB) | Γ_{OPT} | | Rn/50 |
|-----------------------------|---------------------------|------------------------|-----------------------|------|-------|
| | | | MAG | ANG | |
| VCE = 2 V, IC = 3 mA | | | | | |
| 0.50 | 1.37 | 22 | 0.61 | 27 | 0.94 |
| 1.00 | 1.45 | 19 | 0.58 | 37 | 0.49 |
| 1.50 | 1.56 | 16.6 | 0.55 | 45 | 0.67 |
| 2.00 | 1.67 | 14.6 | 0.51 | 53 | 0.56 |
| 2.50 | 1.80 | 13.2 | 0.47 | 62 | 0.45 |
| 3.00 | 1.95 | 12.2 | 0.40 | 82 | 0.34 |
| 4.00 | 2.30 | 10.9 | 0.34 | 159 | 0.14 |
| 5.00 | 2.70 | 10.2 | 0.34 | -134 | 0.31 |

TYPICAL OPTIMUM NOISE MATCH (Γ_{OPT})

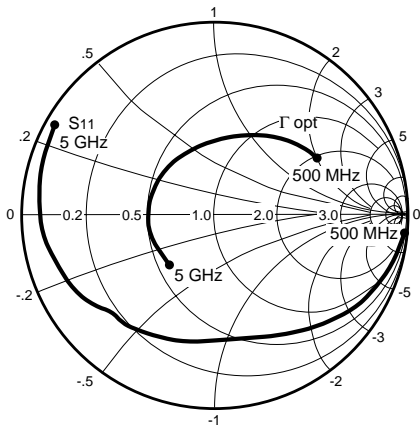

(2 V, 3 mA)

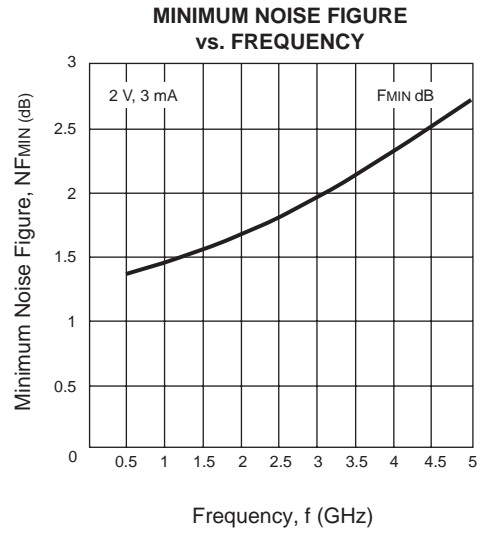

TYPICAL SCATTERING PARAMETERS (T_A = 25°C)

V_{CE} = 2 V, I_c = 1 mA

| FREQUENCY f (MHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | | K | MAG ¹ (dB) |
|----------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|------|--------------------------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | | |
| 100 | 0.963 | -3.9 | 2.863 | 171.7 | 0.006 | 82.8 | 0.987 | -2.7 | 0.21 | 26.7 |
| 250 | 0.962 | -10.0 | 2.880 | 167.7 | 0.015 | 80.1 | 0.989 | -8.2 | 0.11 | 22.8 |
| 400 | 0.953 | -16.1 | 2.893 | 161.3 | 0.024 | 75.5 | 0.984 | -13.0 | 0.12 | 20.8 |
| 600 | 0.934 | -24.2 | 2.886 | 152.6 | 0.035 | 68.8 | 0.973 | -19.5 | 0.16 | 19.2 |
| 800 | 0.907 | -32.4 | 2.893 | 143.7 | 0.045 | 61.8 | 0.957 | -26.0 | 0.21 | 18.1 |
| 1000 | 0.874 | -40.6 | 2.852 | 134.7 | 0.054 | 55.1 | 0.938 | -32.5 | 0.27 | 17.3 |
| 1200 | 0.838 | -49.2 | 2.823 | 126.0 | 0.061 | 48.8 | 0.919 | -39.0 | 0.31 | 16.7 |
| 1400 | 0.799 | -57.6 | 2.758 | 117.5 | 0.066 | 42.6 | 0.897 | -45.5 | 0.37 | 16.2 |
| 1600 | 0.758 | -66.2 | 2.685 | 108.9 | 0.070 | 36.6 | 0.875 | -52.0 | 0.43 | 15.9 |
| 1800 | 0.715 | -75.3 | 2.629 | 100.5 | 0.071 | 31.1 | 0.853 | -58.4 | 0.50 | 15.7 |
| 2000 | 0.668 | -84.6 | 2.573 | 92.0 | 0.071 | 26.1 | 0.834 | -64.7 | 0.58 | 15.6 |
| 2500 | 0.587 | -107.1 | 2.279 | 72.5 | 0.063 | 17.7 | 0.797 | -80.0 | 0.84 | 15.6 |
| 3000 | 0.533 | -131.1 | 2.035 | 54.6 | 0.050 | 19.5 | 0.780 | -94.4 | 1.23 | 13.2 |
| 3500 | 0.518 | -154.4 | 1.772 | 38.0 | 0.042 | 38.7 | 0.785 | -107.6 | 1.56 | 11.9 |
| 4000 | 0.532 | -175.9 | 1.534 | 23.4 | 0.052 | 63.3 | 0.800 | -119.2 | 1.25 | 11.7 |
| 4500 | 0.561 | 165.6 | 1.324 | 10.7 | 0.077 | 72.0 | 0.821 | -129.3 | 0.83 | 12.3 |
| 5000 | 0.592 | 149.7 | 1.146 | -0.5 | 0.108 | 71.1 | 0.841 | -138.1 | 0.58 | 10.3 |

Note:


1. Gain Calculations:

$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} \left(K \pm \sqrt{K^2 - 1} \right). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$


MAG = Maximum Available Gain

MSG = Maximum Stable Gain

TYPICAL SCATTERING PARAMETERS (TA = 25°C)

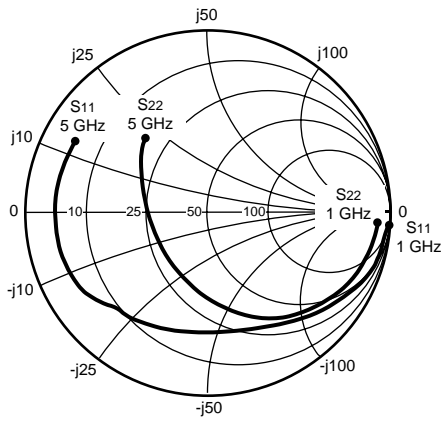

Coordinates in Ohms
Frequency in GHz
(VCE = 2 V, Ic = 3 mA)

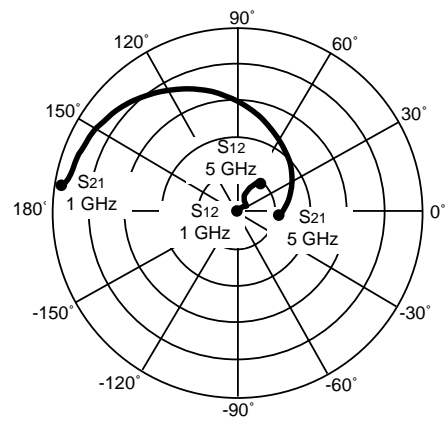

VCE = 2 V, Ic = 3 mA

| FREQUENCY f (MHz) | S11 | | S21 | | S12 | | S22 | | K | MAG ¹ (dB) |
|----------------------|-------|---------|-------|--------|-------|-------|-------|---------|------|--------------------------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | | |
| 100 | 0.910 | -5.49 | 7.711 | 170.42 | 0.006 | 85.31 | 0.983 | -4.58 | 0.15 | 31.2 |
| 200 | 0.903 | -12.15 | 7.507 | 165.89 | 0.012 | 79.32 | 0.975 | -8.86 | 0.15 | 28.0 |
| 300 | 0.886 | -18.46 | 7.391 | 159.88 | 0.017 | 74.51 | 0.962 | -13.10 | 0.19 | 26.3 |
| 400 | 0.867 | -23.84 | 7.277 | 153.86 | 0.022 | 71.17 | 0.949 | -17.19 | 0.21 | 25.1 |
| 500 | 0.844 | -29.82 | 7.211 | 148.01 | 0.027 | 67.27 | 0.932 | -21.20 | 0.24 | 24.2 |
| 600 | 0.818 | -35.35 | 7.024 | 142.43 | 0.031 | 63.60 | 0.913 | -24.97 | 0.28 | 23.5 |
| 700 | 0.789 | -40.72 | 6.842 | 136.76 | 0.035 | 59.99 | 0.893 | -28.57 | 0.33 | 22.9 |
| 800 | 0.758 | -46.19 | 6.679 | 131.59 | 0.038 | 56.72 | 0.873 | -31.93 | 0.37 | 22.4 |
| 900 | 0.727 | -51.33 | 6.479 | 126.49 | 0.041 | 53.71 | 0.853 | -35.20 | 0.41 | 21.9 |
| 1000 | 0.696 | -56.23 | 6.281 | 121.67 | 0.044 | 51.05 | 0.833 | -38.24 | 0.45 | 21.6 |
| 1200 | 0.632 | -66.19 | 5.923 | 112.11 | 0.047 | 46.49 | 0.796 | -44.05 | 0.54 | 21.0 |
| 1400 | 0.573 | -75.35 | 5.541 | 103.48 | 0.050 | 43.02 | 0.763 | -49.33 | 0.64 | 20.5 |
| 1600 | 0.519 | -84.27 | 5.162 | 95.39 | 0.051 | 40.54 | 0.735 | -54.29 | 0.74 | 20.1 |
| 1800 | 0.465 | -93.54 | 4.858 | 87.66 | 0.051 | 39.26 | 0.711 | -59.16 | 0.85 | 19.8 |
| 2000 | 0.421 | -102.59 | 4.554 | 80.30 | 0.051 | 38.93 | 0.692 | -63.82 | 0.96 | 19.5 |
| 2200 | 0.387 | -112.30 | 4.244 | 73.46 | 0.051 | 39.56 | 0.679 | -68.35 | 1.06 | 17.7 |
| 2400 | 0.355 | -122.55 | 3.999 | 66.73 | 0.051 | 41.72 | 0.667 | -73.12 | 1.16 | 16.5 |
| 2600 | 0.331 | -133.20 | 3.771 | 60.20 | 0.051 | 44.53 | 0.659 | -77.85 | 1.25 | 15.7 |
| 2800 | 0.317 | -144.52 | 3.554 | 53.94 | 0.052 | 48.11 | 0.656 | -82.78 | 1.30 | 15.1 |
| 3000 | 0.309 | -156.20 | 3.363 | 47.78 | 0.054 | 52.26 | 0.655 | -87.66 | 1.31 | 14.6 |
| 3500 | 0.328 | 177.03 | 2.911 | 33.02 | 0.065 | 60.65 | 0.668 | -100.67 | 1.19 | 13.9 |
| 4000 | 0.383 | 156.43 | 2.518 | 19.22 | 0.082 | 64.68 | 0.692 | -113.87 | 0.98 | 14.9 |
| 4500 | 0.451 | 142.11 | 2.167 | 6.57 | 0.104 | 64.38 | 0.723 | -126.63 | 0.77 | 13.2 |
| 5000 | 0.527 | 130.35 | 1.864 | -4.78 | 0.126 | 61.60 | 0.737 | -136.90 | 0.64 | 11.7 |

Note:

1. Gain Calculations:


$$MAG = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1})$$

When $K \leq 1$, MAG is undefined and MSG values are used. $MSG = \frac{|S_{21}|}{|S_{12}|}$, $K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}$, $\Delta = S_{11} S_{22} - S_{21} S_{12}$


MAG = Maximum Available Gain

MSG = Maximum Stable Gain

TYPICAL SCATTERING PARAMETERS (T_A = 25°C)

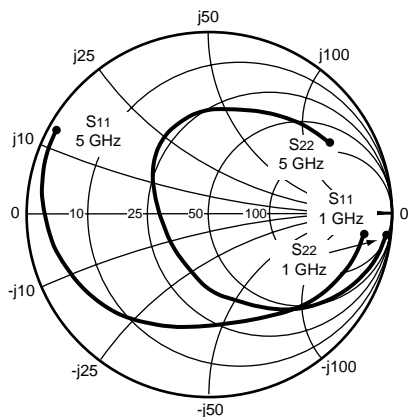

Coordinates in Ohms
Frequency in GHz
(V_{CE} = 2 V, I_c = 5 mA)

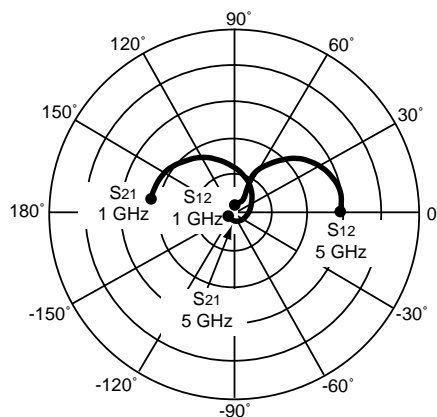

V_{CE} = 2 V, I_c = 5 mA

| FREQUENCY f (MHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | | K | MAG ¹ (dB) |
|----------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|------|--------------------------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | | |
| 100 | 0.852 | -6.7 | 11.171 | 169.3 | 0.006 | 80.8 | 0.969 | -4.3 | 0.29 | 32.8 |
| 250 | 0.828 | -18.7 | 10.993 | 159.7 | 20.014 | 76.4 | 0.954 | -12.3 | 0.21 | 28.9 |
| 400 | 0.786 | -29.4 | 10.602 | 149.3 | 0.021 | 69.7 | 0.922 | -19.1 | 0.27 | 27.0 |
| 600 | 0.713 | -42.9 | 9.916 | 136.3 | 0.029 | 62.0 | 0.871 | -27.3 | 0.37 | 25.3 |
| 800 | 0.629 | -55.3 | 9.125 | 124.3 | 0.035 | 55.7 | 0.816 | -34.3 | 0.48 | 24.1 |
| 1000 | 0.548 | -66.7 | 8.319 | 113.7 | 0.039 | 51.0 | 0.765 | -40.4 | 0.59 | 23.3 |
| 1200 | 0.478 | -77.8 | 7.580 | 104.1 | 0.042 | 47.9 | 0.722 | -45.9 | 0.70 | 22.5 |
| 1400 | 0.415 | -88.4 | 6.906 | 95.6 | 0.044 | 45.9 | 0.686 | -50.9 | 0.82 | 21.9 |
| 1600 | 0.364 | -99.1 | 6.311 | 87.7 | 0.046 | 44.9 | 0.658 | -55.9 | 0.93 | 21.4 |
| 1800 | 0.321 | -110.6 | 5.807 | 80.3 | 0.047 | 45.2 | 0.636 | -60.8 | 1.03 | 19.9 |
| 2000 | 0.289 | -122.1 | 5.355 | 73.5 | 0.048 | 46.0 | 0.621 | -65.7 | 1.12 | 18.4 |
| 2500 | 0.253 | -151.7 | 4.432 | 57.8 | 0.052 | 51.3 | 0.604 | -78.2 | 1.26 | 16.2 |
| 3000 | 0.266 | -177.8 | 3.752 | 43.6 | 0.060 | 57.1 | 0.610 | -90.8 | 1.25 | 15.0 |
| 3500 | 0.305 | 163.3 | 3.214 | 30.5 | 0.072 | 61.1 | 0.634 | -103.1 | 1.12 | 14.4 |
| 4000 | 0.355 | 149.1 | 2.781 | 18.4 | 0.088 | 62.7 | 0.665 | -114.1 | 0.95 | 15.0 |
| 4500 | 0.406 | 138.1 | 2.426 | 7.1 | 0.108 | 61.9 | 0.701 | -123.7 | 0.78 | 13.5 |
| 5000 | 0.451 | 128.3 | 2.135 | -3.3 | 0.130 | 59.6 | 0.735 | -132.1 | 0.63 | 12.2 |

Note:

1. Gain Calculations:

$$MAG = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1})$$

When K ≤ 1, MAG is undefined and MSG values are used. $MSG = \frac{|S_{21}|}{|S_{12}|}$, $K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}$, $\Delta = S_{11} S_{22} - S_{21} S_{12}$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

TYPICAL SCATTERING PARAMETERS (T_A = 25°C)

VCE = 2 V, I_c = 7 mA

| FREQUENCY f (MHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | | K | MAG ¹ (dB) |
|----------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|------|--------------------------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | | |
| 100 | 0.803 | -8.4 | 14.546 | 168.7 | 0.006 | 81.2 | 0.965 | -5.5 | 0.27 | 34.0 |
| 250 | 0.776 | -22.1 | 13.446 | 157.1 | 0.014 | 75.0 | 0.942 | -13.4 | 0.25 | 30.0 |
| 400 | 0.718 | -34.6 | 12.779 | 145.1 | 0.020 | 67.6 | 0.898 | -20.6 | 0.33 | 28.0 |
| 600 | 0.629 | -49.7 | 11.594 | 131.0 | 0.027 | 60.5 | 0.834 | -28.6 | 0.45 | 26.3 |
| 800 | 0.538 | -63.2 | 10.364 | 118.7 | 0.032 | 55.3 | 0.773 | -35.2 | 0.58 | 25.1 |
| 1000 | 0.457 | -75.5 | 9.221 | 108.2 | 0.036 | 51.7 | 0.721 | -40.6 | 0.71 | 24.1 |
| 1200 | 0.388 | -87.6 | 8.246 | 98.8 | 0.038 | 49.9 | 0.679 | -45.5 | 0.83 | 23.3 |
| 1400 | 0.332 | -99.4 | 7.407 | 90.6 | 0.040 | 49.3 | 0.647 | -50.1 | 0.95 | 22.7 |
| 1600 | 0.289 | -111.4 | 6.694 | 83.1 | 0.042 | 49.7 | 0.623 | -54.6 | 1.05 | 20.7 |
| 1800 | 0.255 | -124.4 | 6.100 | 76.2 | 0.044 | 50.9 | 0.606 | -59.3 | 1.14 | 19.2 |
| 2000 | 0.234 | -137.5 | 5.591 | 69.7 | 0.046 | 52.3 | 0.595 | -64.1 | 1.20 | 18.1 |
| 2500 | 0.227 | -168.7 | 4.593 | 54.6 | 0.053 | 57.1 | 0.585 | -76.6 | 1.26 | 16.3 |
| 3000 | 0.258 | 168.0 | 3.869 | 40.9 | 0.064 | 61.1 | 0.598 | -89.6 | 1.20 | 15.1 |
| 3500 | 0.305 | 152.0 | 3.304 | 28.2 | 0.077 | 63.0 | 0.624 | -102.0 | 1.07 | 14.7 |
| 4000 | 0.359 | 140.6 | 2.856 | 16.3 | 0.094 | 63.0 | 0.658 | -113.2 | 0.91 | 14.8 |
| 4500 | 0.408 | 131.3 | 2.491 | 5.4 | 0.114 | 61.2 | 0.695 | -123.0 | 0.75 | 13.4 |
| 5000 | 0.453 | 122.8 | 2.191 | -4.9 | 0.135 | 58.4 | 0.730 | -131.5 | 0.62 | 12.1 |

Note:

1. Gain Calculations:

$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} \left(K \pm \sqrt{K^2 - 1} \right). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

EXCLUSIVE NORTH AMERICAN AGENT FOR **NEC** RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279
24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: <http://WWW.CEL.COM>

DATA SUBJECT TO CHANGE WITHOUT NOTICE



PRINTED IN USA ON RECYCLED PAPER -10/98