

Silicon NPN Power Transistors

2SD1415A

DESCRIPTION

www.datasheet4u.com

- With TO-220F package
- High DC current gain
- Low saturation voltage
- DARLINGTON

APPLICATIONS

- High power switching applications
- Hammer drive,pulse motor drive applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

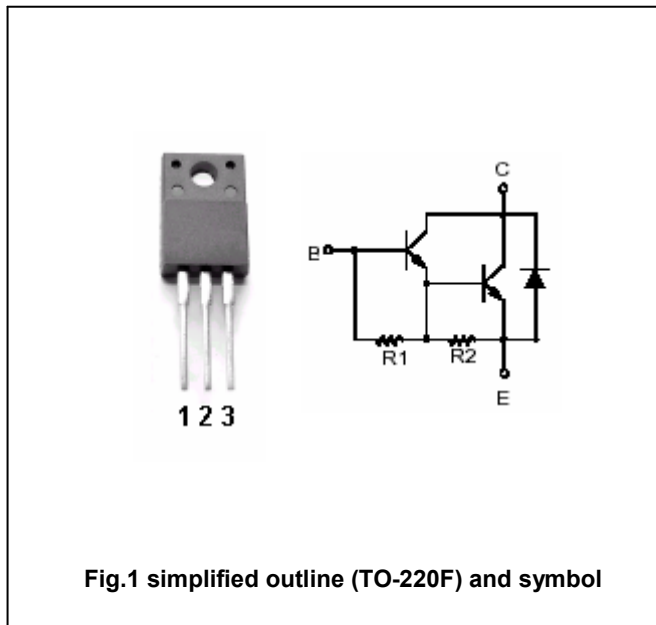


Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings(Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	120	V
V _{CEO}	Collector -emitter voltage	Open base	100	V
V _{EBO}	Emitter-base voltage	Open collector	6	V
I _C	Collector current		7	A
I _{CP}	Collector current peak		10	A
I _B	Base current		0.7	A
P _C	Collector power dissipation	T _C =25°C	25	W
		T _a =25°C	2.0	
T _j	Junction temperature		150	°C
T _{stg}	Storage temperature		-55~150	°C

Silicon NPN Power Transistors

2SD1415A

CHARACTERISTICS

www.datasheet4u.com

 $T_j=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=50\text{mA}; I_B=0$	100			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=3\text{A}; I_B=6\text{mA}$		0.9	1.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=3\text{A}; I_B=6\text{mA}$		1.5	2.0	V
I_{CBO}	Collector cut-off current	$V_{CB}=100\text{V}; I_E=0$			100	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=6\text{V}; I_C=0$			3.0	mA
h_{FE-1}	DC current gain	$I_C=3\text{A}; V_{CE}=3\text{V}$	2000		15000	
h_{FE-2}	DC current gain	$I_C=6\text{A}; V_{CE}=3\text{V}$	1000			

Switching times

t_{on}	Turn-on time	$I_{B1}=-I_{B2}=6\text{mA}$ $V_{CC}\approx 45\text{V}, R_L=15\Omega$		0.3		μs
t_{stg}	Storage time			5.1		μs
t_f	Fall time			0.6		μs

Silicon NPN Power Transistors

2SD1415A

PACKAGE OUTLINE

www.datasheet4u.com

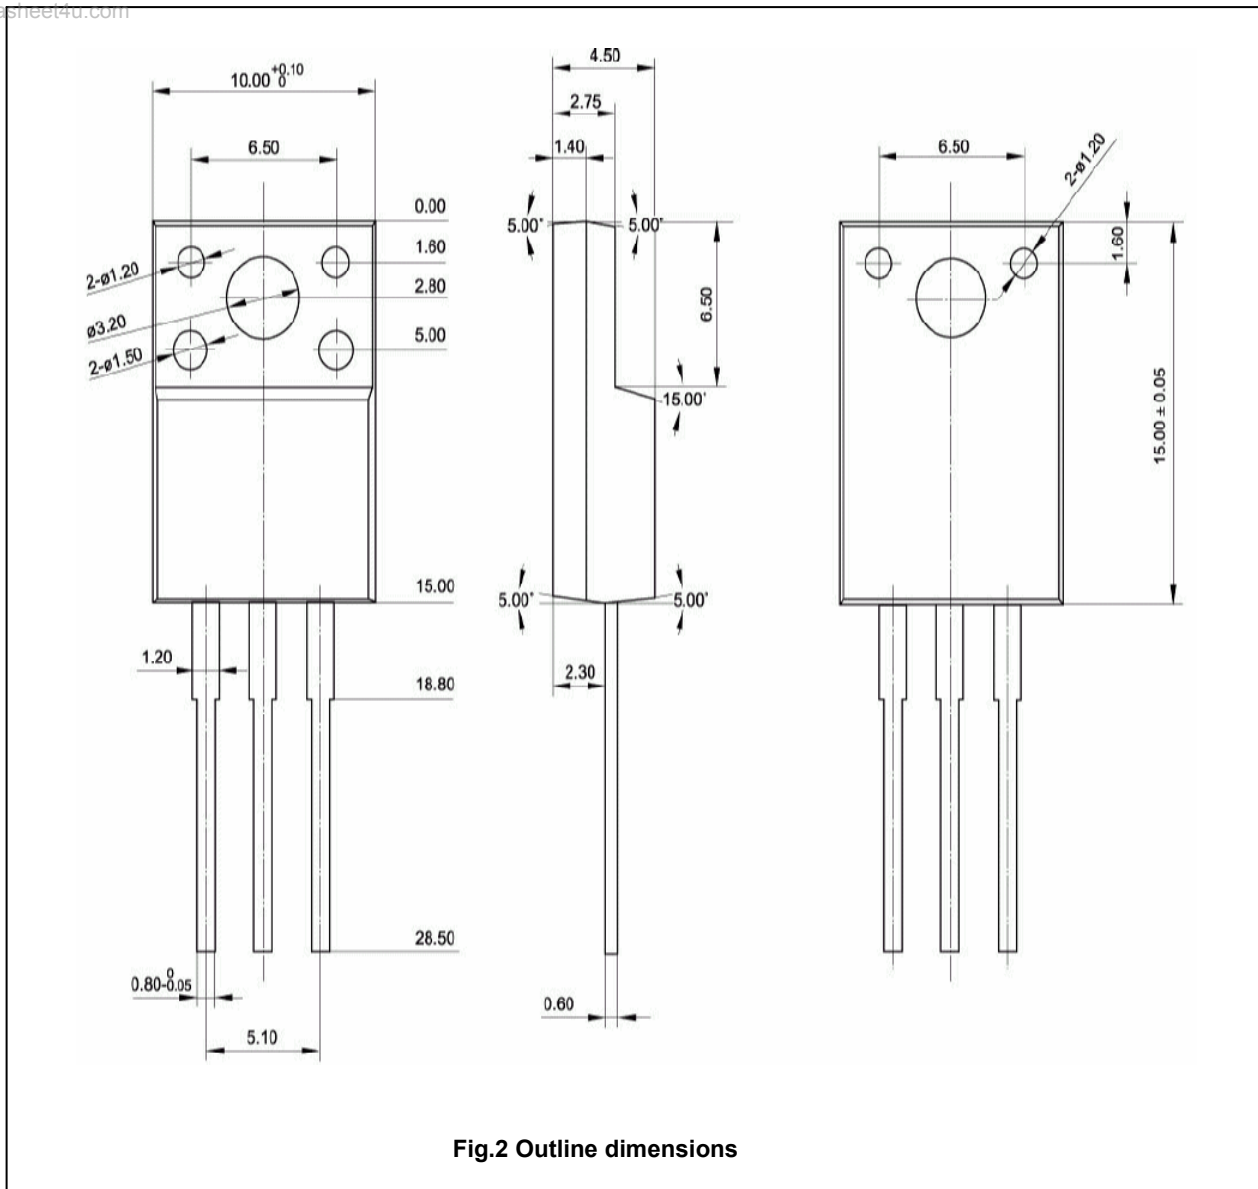


Fig.2 Outline dimensions